



# Honeywell

**We understand commitment to safety.**

***You rely on your workers to get the job done  
and they count on you to keep them safe.***



**Industry Best Pricing**



**Finance Available**



**Short to Medium Project-Based Rental Solutions**



**Dedicated Technical & After-Sales Support**



**In-house Diagnostics, Repair & NATA Calibration Laboratory**



**FREECALL 1800 680 680**

**Honeywell**  
THE POWER OF CONNECTED

**MILLER**

**HOWARD  
LEIGHT**



This reference material is provided by TMG Test Equipment, a Honeywell Certified Service Agent and Channel Partner



ABN 43 064 478 842

➤ 231 osborne avenue clayton south, vic 3169  
PO box 1548, clayton south, vic 3169  
t 03 9265 7400 f 03 9558 0875  
freecall 1800 680 680  
[www.tmgtestequipment.com.au](http://www.tmgtestequipment.com.au)

## Test & Measurement

- sales
- rentals
- calibration
- repair
- disposal

## Complimentary Reference Material

This PDF has been made available as a complimentary service for you to assist in evaluating this model for your testing requirements.

TMG offers a wide range of test equipment solutions, from renting short to long term, buying refurbished and purchasing new. Financing options, such as Financial Rental, and Leasing are also available on application.


TMG will assist if you are unsure whether this model will suit your requirements.

Call TMG if you need to organise repair and/or calibrate your unit.

If you click on the “Click-to-Call” logo below, you can call us for FREE!

TMG Corporate Website

TMG Products Website

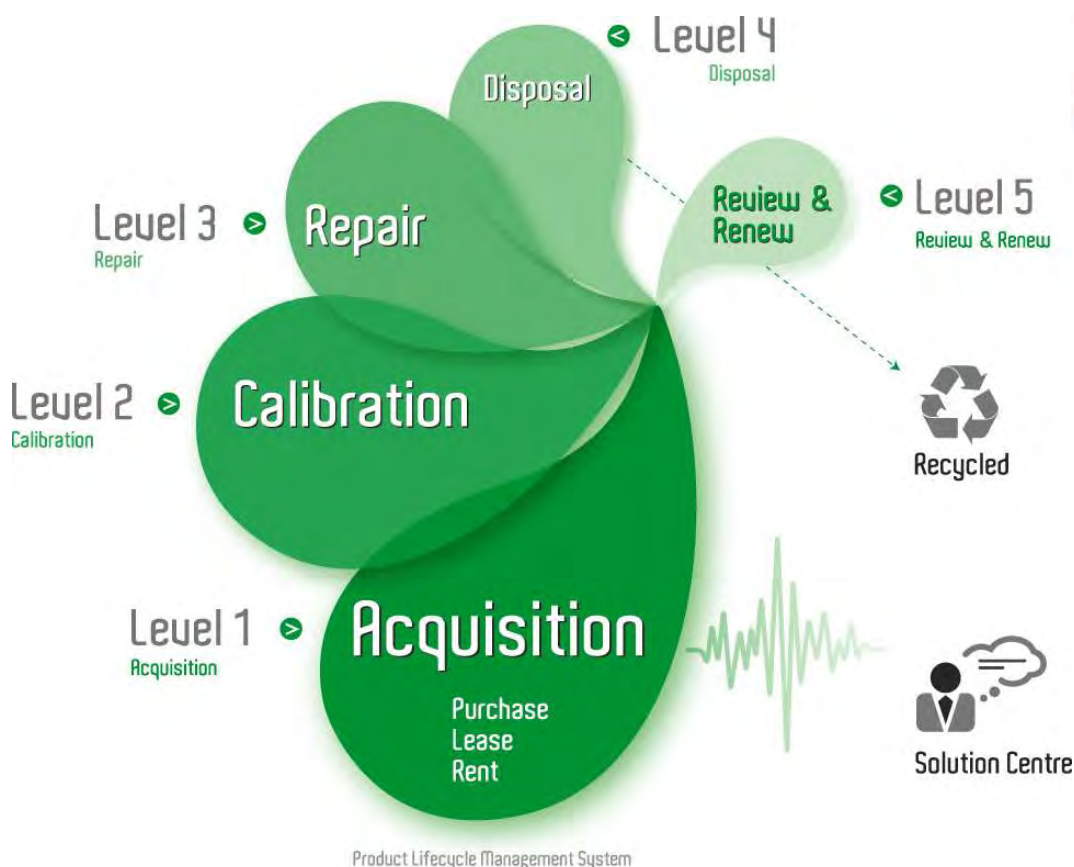

### Disclaimer:

All trademarks appearing within this PDF are trademarks of their respective owners.



# GasAlert MicroClipXT

**multi-gas detector**



## Multi-gas made simple

The slim and compact GasAlertMicroClip XT provides affordable protection from atmospheric hazards. With continuous visual confirmation of detector operation and compliance provided by the IntelliFlash™ feature. Simple one-button operation for the ultimate ease of use significantly reduces training times. The GasAlertMicroClip XT is fully compatible with BW's MicroDock II automatic test and calibration system.



H<sub>2</sub>S

CO

O<sub>2</sub>

LEL

- Continuous visual compliance with IntelliFlash
- Multi-gas versatility with one-button simplicity
- Incredibly thin and lightweight, making it comfortable to wear

**WATER  
RESISTANT** 



**BW**  
Technologies  
by Honeywell

**Wear yellow. Work safe.**

### Standard features of BW products:

- Continuous LCD shows real-time gas concentrations
- Compact and lightweight design makes it comfortable to wear
- Water-resistant
- Simple automatic calibration procedure; compatible with BW MicroDock II automatic test and calibration station
- Full function self-test of sensor, battery status, circuit integrity and audible/visual alarms on start up
- Bright wide-angled visual alarm bars
- Built-in concussion-proof boot

### GasAlertMicroClip Specifications

Size	4.4 x 2.4 x 1.1 in. / 11.3 x 6.0 x 2.9 cm																							
Weight	6 oz. / 171 g																							
Temperature	-4 to +122°F / -20 to +50°C																							
Humidity	0% - 95% RH (non-condensing)																							
Alarms	- Visual, vibrating, audible (95 dB) - Low, High, STEL, TWA, OL (over limit)																							
Tests	Audible/visual alarms on activation, sensors, battery and circuitry (continuous)																							
Pump	Compatible with the Sampler motorized sampling pump																							
Typical battery life	10 hours (typical); recharges in less than 4 hours																							
User options	<table><tr><td>Confidence beep</td><td>Combustible gas measurement (% LEL or % by volume methane)</td></tr><tr><td>Set STEL interval</td><td></td></tr><tr><td>Sensor on/off</td><td>User-settable calibration gas level</td></tr><tr><td>Latching alarms</td><td></td></tr><tr><td>Safe display mode</td><td>Force bump test when overdue</td></tr><tr><td>Stealth mode</td><td></td></tr><tr><td>Calibration lock</td><td>Force calibration when overdue</td></tr><tr><td>Auto zero on start up</td><td></td></tr><tr><td>O<sub>2</sub> auto calibration on start up</td><td>Low alarm acknowledge</td></tr><tr><td>Set bump test interval</td><td>Language choices (five)</td></tr><tr><td>IntelliFlash interval</td><td>Set custom start up message</td></tr></table>		Confidence beep	Combustible gas measurement (% LEL or % by volume methane)	Set STEL interval		Sensor on/off	User-settable calibration gas level	Latching alarms		Safe display mode	Force bump test when overdue	Stealth mode		Calibration lock	Force calibration when overdue	Auto zero on start up		O <sub>2</sub> auto calibration on start up	Low alarm acknowledge	Set bump test interval	Language choices (five)	IntelliFlash interval	Set custom start up message
Confidence beep	Combustible gas measurement (% LEL or % by volume methane)																							
Set STEL interval																								
Sensor on/off	User-settable calibration gas level																							
Latching alarms																								
Safe display mode	Force bump test when overdue																							
Stealth mode																								
Calibration lock	Force calibration when overdue																							
Auto zero on start up																								
O <sub>2</sub> auto calibration on start up	Low alarm acknowledge																							
Set bump test interval	Language choices (five)																							
IntelliFlash interval	Set custom start up message																							
Ratings	EMI/RFI: Complies with EMC Directive 89/336/EEC IP 66/67																							
Certifications and approvals	 Class I, Div. 1, Gr. A, B, C, D <b>ATEX:</b>  II 1 G Ex ia IIC T4 Ga <b>IECEX:</b> Ex ia IIC T4 Ga <b>CE:</b> European Conformity																							
Warranty	Full two-year warranty including all sensors																							

### Additional GasAlertMicroClip XT features:

- IntelliFlash verifies operation and compliance to both the user and supervisor
- Tamper-proof, one button operation
- Compatible with the Sampler motorized remote sampling pump
- Equipped with internal vibrating alarm for high noise areas
- Powered by a lithium polymer battery
- Multi-language support in English, French, German, Spanish and Portuguese
- Conveniently manage your fleet using Fleet Manager II

### Options and Accessories



MicroDock II compatible



Auxiliary filter kit



IR connectivity kit




Five unit cradle charger

For a complete list of accessories, please contact BW Technologies by Honeywell.

### Sensor Specifications

Gas	Measuring Range	Resolution
<b>H<sub>2</sub>S</b>	0-100 ppm	1 ppm
<b>CO</b>	0-500 ppm	1 ppm
<b>O<sub>2</sub></b>	0-30.0%	0.1%
<b>Combustible gases</b>	0-100% LEL 0-5.0% v/v	1% 0.1%
Alarm setpoints for all sensors are user adjustable. Setpoints are automatically displayed during instrument start up.		

### Locally available from



### Corporate Headquarters

2840 - 2 Avenue S.E.  
Calgary, AB, Canada T2A 7X9  
Phone: +1.403.248.9226  
Toll free: 1.800.663.4164

[www.gasmonitors.com](http://www.gasmonitors.com)

USA 1.888.749.8878  
Europe +44 (0)1295.700.300  
France +33 (0) 442.98.17.70  
Germany 49 (0) 2137.17.6522

[info@gasmonitors.com](mailto:info@gasmonitors.com)

Middle East +971.4.450.5852  
S.E. Asia +65.6580.3468  
China +86.10.6786.7305  
Australia +61.3.9464.2770

Latin America +55.11.3309.1030  
Other Countries +1.403.248.9226

DUE TO ONGOING RESEARCH AND PRODUCT IMPROVEMENT, SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.