



ABN 43 064 478 842

231 Osborne Avenue Clayton South, VIC 3169  
PO Box 1548, Clayton South, VIC 3169  
t 03 9265 7400 f 03 9558 0875  
freecall 1800 680 680  
www.tmgtestequipment.com.au

## Test & Measurement

- > sales
- > rentals
- > calibration
- > repair
- > disposal

## Complimentary Reference Material

This PDF has been made available as a complimentary service for you to assist in evaluating this model for your testing requirements.

TMG offers a wide range of test equipment solutions, from renting short to long term, buying refurbished and purchasing new. Financing options, such as Financial Rental, and Leasing are also available on application.

TMG will assist if you are unsure whether this model will suit your requirements.

Call TMG if you need to organise repair and/or calibrate your unit.


If you click on the "Click-to-Call" logo below, you can call us for FREE!

TMG Corporate Website

TMG Products Website



Click-to-Call  
TMG Now

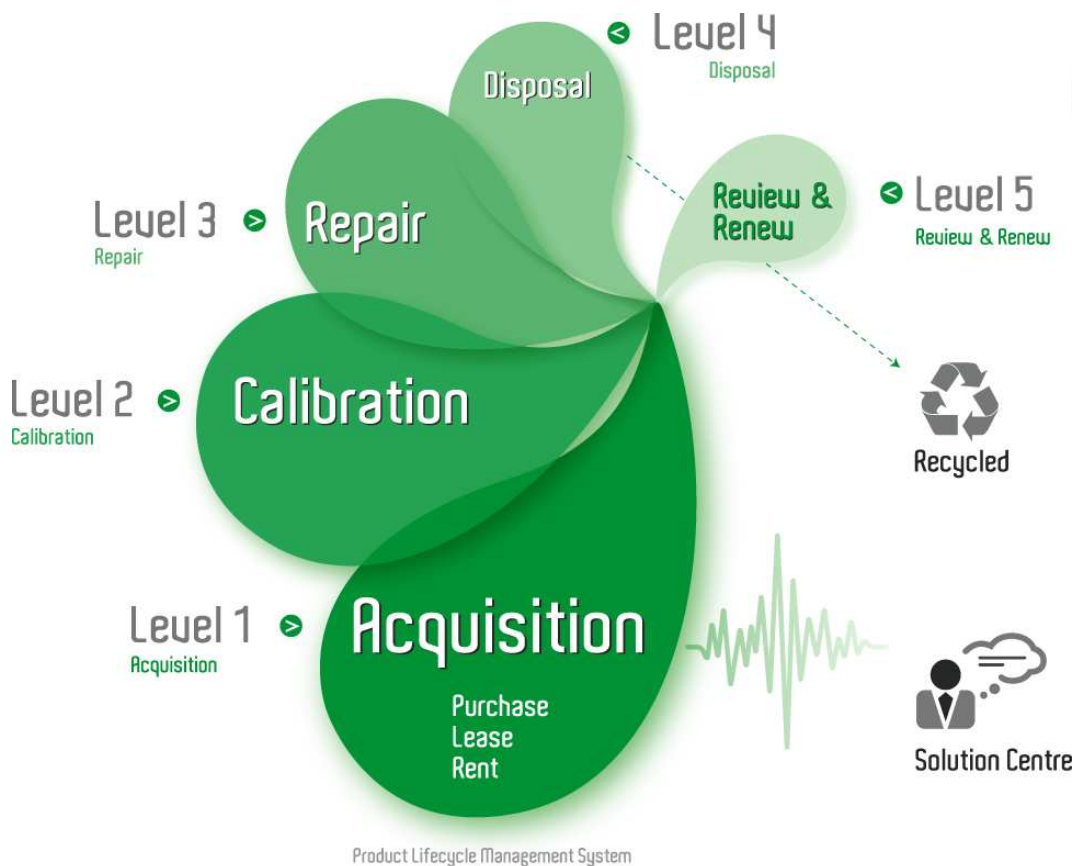

Product Lifecycle Management System

### Disclaimer:

All trademarks appearing within this PDF are trademarks of their respective owners.



## The NIC ASA 312

The Digital Lightwave NIC ASA 312 Network Information Computer is an intuitive portable testing platform for SONET, ATM and T-Carrier networks.

The Digital Lightwave NIC ASA 312<sup>®</sup> Network Information Computer<sup>®</sup> is a portable instrument for verifying and qualifying the performance of telecommunications networks and embedded network elements.

Providing a broad range of capabilities in a compact 10.5 to 14-pound package (depending on configuration), the NIC ASA 312 can simultaneously and independently test protocols ranging from DS0 through OC-48c—including ATM.

With a flexible software/firmware-based architecture, the multifunctional NIC ASA 312 combines in a single platform a multitude of traditional hardware-based test sets required to install, monitor and maintain T-Carrier, SONET and ATM networks.

The NIC ASA 312 is easy to use, with intuitive touch-sensitive GUI and test-scripting capabilities that allow

technicians of any experience level to effectively operate the unit. Its flexible design lets you configure it to meet your current needs, then upgrade quickly and inexpensively as your network environment changes.

Combining innovative features, functionality and performance into a single cost-effective product, the NIC ASA 312 Network Information Computer is the most advanced testing platform available today.



Network Information Computer (NIC ASA 312)

# The NIC ASA 312

The Network Information Computer product family is a comprehensive line of portable analyzers used during the design, manufacture, installation, and maintenance of global fiber-optic networks, including SONET/SDH, DWDM, GigE, OSA, POS, ATM, Jitter, and T/E-Carrier.

## Major Features:

- Simultaneous and independent testing of T-carrier, ATM, and SONET. Separate protocol processors for DS1/E1, DS3, ATM, and SONET (includes STS-1, OC-1, OC-3, OC-12, OC-48 with STS-3c, STS-12c, and STS-48c)
- Internal DS1 and DS3 drop/insert from SONET, built in M13
- SONET 1310 nm, 1550 nm or 1310/1550 nm switchable wavelength laser option
- SONET OC-48 through-mode with overhead manipulation
- ATM support for AAL0, AAL1, AAL5, traffic shaping, PVC/SVC, OAM, QoS measurements, HEC error generation, cell transfer delay
- Alarm/error generation and analysis
- Test set configuration with graphical switch matrix
- Auto configuration to pattern level
- Troublescan
- 9.5-inch active matrix color display with touch screen
- PCMCIA interface
- Built-in optical and electrical power and frequency measurement
- Remote control GUI
- Software/firmware upgradeable via Web
- SCPI over GPIB, TCP/IP, or RS-232c

Specifications are subject to change without notice.




## General Specifications

Operating Temperature: 0° to 40° C @ 85% RH  
 Storage Temperature: -20° to 60° C @ 95% RH  
 Power Requirements: 100 to 120 and 200 to 240 V AC, 50-60 Hz  
 Power Requirements with OC-48: 95 watts  
 Dimensions: 10.1 H x 12.3 W x 4.7 D in (257 x 312 x 120 mm)  
 Weight: 10.5 - 14 lbs (depending on configuration)

## Auxiliary Interfaces

RS-232c: DB-9  
 Parallel Port: DB-25 GPIB  
 DCC: DB-37  
 BITS Clock: Bantam

Orderwire: RJ-style handset  
 PCMCIA: Single Slot: Type I or II  
 10 BaseT: RJ-45

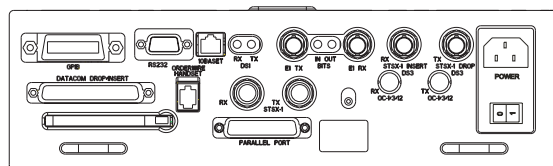

Connector Panel

## Ordering Information

For complete feature availability, ordering and pricing information, call your Digital Lightwave sales representative at +1 727 442 6677, or visit our Web site at [www.lightwave.com](http://www.lightwave.com).



[www.lightwave.com](http://www.lightwave.com)  
[info@lightwave.com](mailto:info@lightwave.com)

United States/Caribbean  
 15550 Lightwave Drive  
 Clearwater, FL 33760  
 Toll free: +1 877 442 DIGL  
 T: +1 727 442 6677  
 F: +1 727 442 5660

Europe/Middle East/Africa  
 Eastway Enterprise Centre  
 7 Paynes Park  
 Hitchin Hertfordshire  
 England SG5 1EH  
 T: +44 (0) 1462 429719  
 F: +44 (0) 1462 429760

Asia/Pacific Rim  
 Digital Lightwave Asia Pacific Pty. Ltd.  
 236 Balaclava Road  
 Caulfield North, Victoria  
 Australia 3161  
 T: +61 3 9509 4610  
 F: +61 3 9509 4615

Latin America  
 Digital Lightwave Ltd.  
 Rua Helade, 81  
 Sao Paulo, Brazil 04634-000  
 T: +55 11 5034 7277  
 F: +55 11 5034 7424

Digital Lightwave provides industry-leading products, technologies, and services for deploying and managing communications networks. Telecommunications service providers and equipment manufacturers rely on our offerings to develop, install, maintain, and manage high-performance networks. With a presence in more than 80 countries, Digital Lightwave enables customers to successfully implement optical-based networks worldwide. To find the nearest sales office, please visit [www.lightwave.com](http://www.lightwave.com).

