



ABN 43 064 478 842

➤ 231 osborne avenue clayton south, vic 3169
PO box 1548, clayton south, vic 3169
t 03 9265 7400 f 03 9558 0875
freecall 1800 680 680
www.tmgtestequipment.com.au

Test & Measurement

- sales
- rentals
- calibration
- repair
- disposal

Complimentary Reference Material

This PDF has been made available as a complimentary service for you to assist in evaluating this model for your testing requirements.

TMG offers a wide range of test equipment solutions, from renting short to long term, buying refurbished and purchasing new. Financing options, such as Financial Rental, and Leasing are also available on application.

TMG will assist if you are unsure whether this model will suit your requirements.

Call TMG if you need to organise repair and/or calibrate your unit.


If you click on the “Click-to-Call” logo below, you can call us for FREE!

TMG Corporate Website

TMG Products Website



Click-to-Call
TMG Now

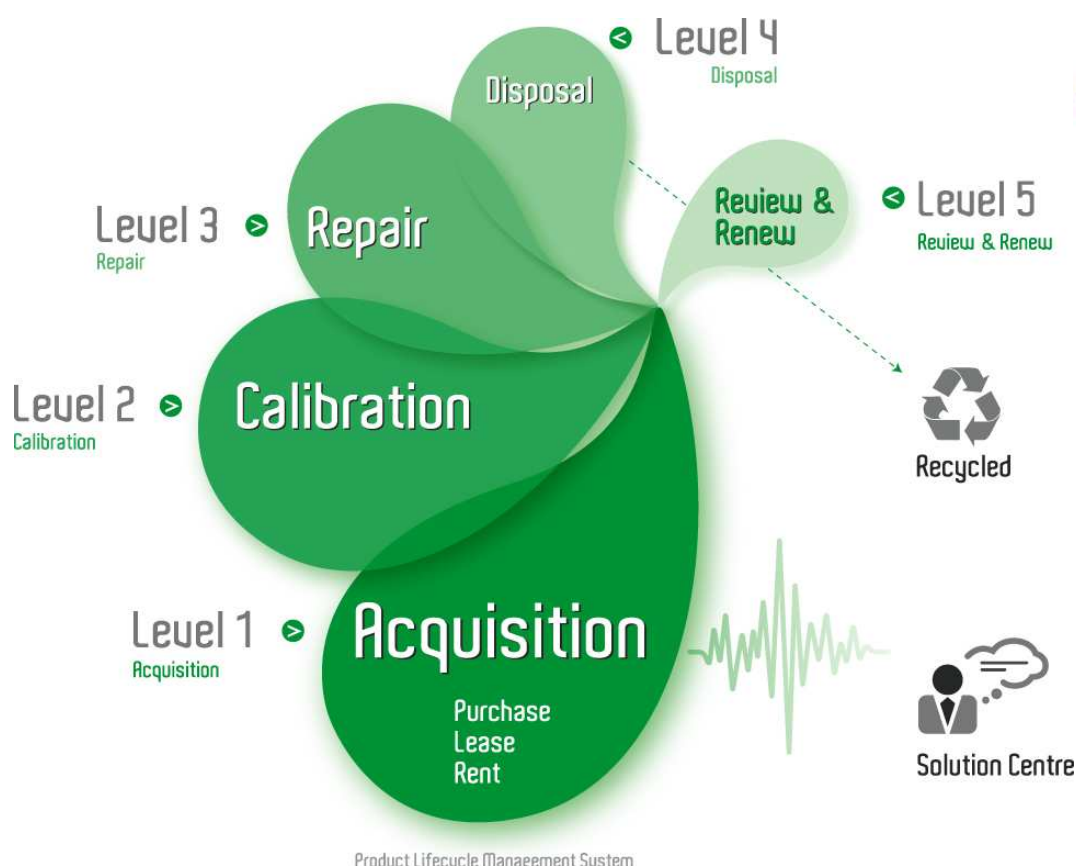

Disclaimer:

All trademarks appearing within this PDF are trademarks of their respective owners.

Technical Information

Power Sensor R&S NRP-Z91

Universal power measurement from 9 kHz to 6 GHz

The Power Sensor R&S NRP-Z91 is designed for measuring average power in a very wide frequency range. In particular, it covers the frequency bands relevant for terrestrial radio-communication. It is thus ideal not only for EMC applications but also as a truly universal power sensor.

The sensor can be operated on the R&S NRP base unit and also as a standalone device on a PC or a PC-based measuring instrument.

- 90 dB dynamic range
- Able to handle signals with any type of modulation
- Very low measurement uncertainty
- Excellent matching
- Low sensitivity to harmonics
- Operable on a PC without power meter base unit

Specifications

Bold: Parameter 100% tested

Italics: Uncertainties calculated from the test assembly specifications and the modelled behaviour of the sensor.

Normal: Compliance with specifications is ensured by the design or derived from the measurement of related parameters

Power Sensor R&S NRP-Z91

Frequency range		9 kHz to 6 GHz
Matching (SWR)	9 kHz to 2.4 GHz > 2.4 GHz to 6.0 GHz	< 1.13 (1.11) < 1.20 (1.18)
Level-dependent matching change ²⁾	9 kHz to 2.4 GHz > 2.4 GHz to 6.0 GHz	values in () for temperature range 15°C to 35°C < 0.05 (0.02) < 0.08 (0.05)
Power measurement range		200 pW to 200 mW (-67 dBm to +23 dBm)
Max. power	Average Peak envelope power	0.4 W (+26 dBm) continuous 1 W (+30 dBm) for max. 10 µs
Measurement subranges	Path 1 Path 2 Path 3	-67 dBm to -14 dBm -47 dBm to +6 dBm -27 dBm to +23 dBm
Transition ranges	With automatic path selection, user def'd crossover ⁵⁾ set to 0 dB	(-19±1) dBm to (-13±1) dBm (+1±1) dBm to (+7±1) dBm
Display noise ¹⁴⁾	15°C to 35°C Path 1 2 3 0°C to 50°C Path 1 2 3	< 60 pW (40 pW typ.) < 5.6 nW (3.6 nW typ.) < 0.56 µW (0.36 µW typ.) < 65 pW < 6.3 nW < 0.63 µW
Display noise, relative ¹⁵⁾	Measurement window 2 × 1 ms, without averaging Measurement window 2 × 20 ms, averaging factor 32 (measurement time approx. 1 s)	< 0.05 dB (0.03 dB typ.) < 0.002 dB (0.001 dB typ.)
Zero offset ¹⁷⁾	15°C to 35°C Path 1 2 3 0°C to 50°C Path 1 2 3	< 96 pW (64 pW typ.) < 9.0 nW (5.8 nW typ.) < 0.90 µW (0.58 µW typ.) < 104 pW < 10.0 nW < 1.00 µW
Zero drift ¹⁸⁾	Path 1 Path 2 Path 3	< 35 pW < 3 nW < 0.3 µW
Triggering	Source Slope (external, internal) Level Internal External Delay Holdoff Hysteresis	Bus, External, Hold, Immediate, Internal pos./neg. -40 dBm to +23 dBm See specs for R&S NRP and USB Adapter R&S NRP-Z3 -5 ms to +100 s 0 s to 10 s 0 dB to 10 dB

Power Sensor R&S NRP-Z91 (continued)

Uncertainty for absolute power measurements³¹⁾ in dB

9 kHz to < 20 kHz

0.174	0.175	0.175	(0...50) °C
0.075	0.070	0.071	(15...35) °C
0.056	0.047	0.048	(20...25) °C

-40³⁷⁾ to -19 to +1 to +23 dBm

20 kHz to < 100 MHz

0.147	0.159	0.159	(0...50) °C
0.072	0.069	0.069	(15...35) °C
0.056	0.047	0.048	(20...25) °C

-40³⁷⁾ to -19 to +1 to +23 dBm

100 MHz to 4 GHz

0.150	0.162	0.164	(0...50) °C
0.081	0.077	0.081	(15...35) °C
0.066	0.058	0.063	(20...25) °C

-40³⁷⁾ to -19 to +1 to +23 dBm

> 4 GHz to 6 GHz

0.160	0.170	0.174	(0...50) °C
0.096	0.089	0.097	(15...35) °C
0.083	0.072	0.082	(20...25) °C

-40³⁷⁾ to -19 to +1 to +23 dBm

Uncertainty for relative power measurements^{32), 33), 36)} in dB

9 kHz to < 20 kHz

+23	0.226 0.084 0.046	0.229 0.080 0.044	0.027 0.022 0.022
+7			
+1	0.226 0.083 0.045	0.027 0.022 0.022	0.229 0.080 0.044
-13			
-19	0.023 0.022 0.022	0.226 0.083 0.045	0.226 0.084 0.046
-40 ³⁷⁾			

dBm -40³⁷⁾ -19 / -13 ±0 / +8 +23

20 kHz to < 100 MHz

+23	0.206 0.082 0.046	0.215 0.078 0.044	0.027 0.022 0.022	(0...50) °C (15...35) °C (20...25) °C
+7				
+1	0.205 0.081 0.044	0.027 0.022 0.022	0.215 0.078 0.044	(0...50) °C (15...35) °C (20...25) °C
-13				
-19	0.023 0.022 0.022	0.205 0.081 0.044	0.206 0.082 0.046	(0...50) °C (15...35) °C (20...25) °C
-40 ³⁷⁾				

dBm -40³⁷⁾ -19 / -13 ±0 / +8 +23

100 MHz to 4 GHz

+23	0.209 0.088 0.055	0.218 0.085 0.047	0.038 0.032 0.031
+7			
+1	0.206 0.083 0.048	0.028 0.022 0.022	0.218 0.085 0.047
-13			
-19	0.023 0.022 0.022	0.206 0.083 0.048	0.209 0.088 0.055
-40 ³⁷⁾			

dBm -40³⁷⁾ -19 / -13 ±0 / +8 +23

> 4 GHz to 6 GHz

+23	0.215 0.097 0.066	0.223 0.093 0.059	0.049 0.044 0.043	(0...50) °C (15...35) °C (20...25) °C
+7				
+1	0.210 0.088 0.054	0.030 0.022 0.022	0.223 0.093 0.059	(0...50) °C (15...35) °C (20...25) °C
-13				
-19	0.024 0.022 0.022	0.210 0.088 0.054	0.215 0.097 0.066	(0...50) °C (15...35) °C (20...25) °C
-40 ³⁷⁾				

dBm -40³⁷⁾ -19 / -13 ±0 / +8 +23

Additional characteristics of R&S NRP-Z91

Sensor type		3-path diode sensor		
Measurand		average power of incident wave average power of source into 50 Ω ¹⁾		
RF connector		N (male)		
Calibration uncertainty ³⁰⁾ in dB (20 to 25) °C	9 kHz to < 100 MHz 0.1 GHz to 4.0 GHz > 4 GHz to 6 GHz	Path 1	Path 2	Path 3
		0.056	0.047	0.048
		0.066	0.057	0.057
	> 4 GHz to 6 GHz	0.083	0.071	0.072
Measurement function		Continuous Average		
	Measurement window ⁷⁾ Duty cycle correction ⁸⁾ Smoothing	2 × (1 ms to 300 ms) 0.001% to 100.00% See under Measurement window		
Dynamic behaviour of video path	Rise time 10% / 90%	< 5 ms		
Sampling frequency		133.358 kHz		
Zeroing (duration)	Depends on setting of averaging filter AUTO ON AUTO OFF Integration time ¹⁶⁾ < 4 s 4 s to 16 s >16 s	4 s 4 s Integration time ¹⁶⁾ 16 s		
Measurement error due to harmonics $n \times f_0$ of carrier frequency ¹⁹⁾ values in []: typ. standard uncertainty	$N = 3, 5, 7, \dots$ ²⁰⁾ $N = 2, 4, 6, \dots$ ²⁰⁾	-30 dBc -20 dBc -10 dBc -30 dBc -20 dBc -10 dBc		
		<0.003 dB [0.0015 dB] <0.010 dB [0.005 dB] <0.040 dB [0.015 dB] <0.001 dB [0.0003 dB] <0.002 dB [0.001 dB] <0.010 dB [0.003 dB]		
Modulation influence ²¹⁾ values in []: User def'd crossover ≤ -6 dB	General WCDMA (3-GPP Test Model 1-64) AM (80 %) Worst case Typical	measurement errors in subranges are proportional to power and depend on CCDF and modulation bandwidth of test signal -0.02 dB to +0.07 dB [-0.02 dB to +0.02 dB] -0.01 dB to +0.03 dB [-0.01 dB to +0.01 dB]		
Measurement window	Duration Shape	as specified for the measurement function rectangular (integrating behaviour) Von Hann (smoothing filter, for efficient suppression of result variations due to modulation ²⁶⁾ .		
Measurement times ²⁷⁾		N × (duration of meas. window ⁷⁾ +10ms) -3.4 ms+ t_d t_d must be considered with activated auto delay (1ms to 20 ms dependent from temperature)		
Auto delay		If activated, the beginning of a measurement is delayed so, that settled readings for a power step up to ±10 dB are obtained (to ±0.005 dB) .		

Averaging filter	Modes	AUTO OFF (fixed averaging factor) AUTO ON (continuously auto-adapted) AUTO ONCE (automatically fixed once)
	AUTO mode Normal operating mode ²³⁾ Resolution Fixed Noise operating mode Noise content Max. measurement time ²⁴⁾ Averaging factor N Result output Moving Average Repeat	setting of filter depends on power to be measured and resolution 1 (1 dB), 2 (0.1 dB), 3 (0.01 dB), 4 (0.001 dB) filter set to specified noise content 0.0001 dB to 1 dB 0.01 s to 999 s 1 to 2 ¹⁶ (number of averaged measurement windows) continuous with every newly evaluated measurement window (e.g. in case of manual operation via R&S NRP) only final result (e.g. in case of remote control of R&S NRP)
Attenuation correction	Function	correcting the measurement result by means of a fixed factor (dB offset)
	Range	-100.000 dB to +100.000 dB
S-parameter correction	Function	Taking into account a component connected to the sensor input by loading its s-parameter data set into the sensor
	Number of frequencies Parameters Download	1 to 1000 S ₁₁ , S ₂₁ , S ₁₂ and S ₂₂ (in s2p format) With R&S NRP tool kit (supplied with sensor) via USB Adapter R&S NRP-Z3 or R&S NRP-Z4
Γ correction	Function	Reducing the influence of mismatched sources ²⁹⁾
	Parameters Download	Magnitude and phase of reflection coefficient of source see under S-parameter correction
Frequency response correction	Function	taking into account the calibration factors relevant for the test frequency
	Parameter Permissible deviation from actual value	carrier frequency (center frequency) 50 MHz (0.05 × f below 1 GHz) for specified measurement uncertainty
Interface to host	Power supply	+5 V / 200 mA typ. (USB high-power device)
	Remote control Trigger input	As a USB device (function) in full-speed mode, compatible with USB 1.0/1.1/2.0 specifications differential (0 / +3.3 V)
Dimensions	W x H x L	48 mm × 31 mm × 170 mm Length incl. connecting cable: approx. 1.6 m
Weight		< 0.3 kg

Footnotes

Please refer to the R&S NRP data sheet for footnotes not mentioned below.

- ³³⁾ Reading the uncertainty for relative power measurements. The example shows a level step of approx. 14 dB (-4 dBm → +10 dBm) at 1.9 GHz and an ambient temperature of 28°C.



- ³⁷⁾ For measurements at even lower levels the influence of zero offset and zero drift must be added to the specifications on an RSS basis. The same applies to noise exceeding a two-sigma value of 0.01 dB.

General specifications

See the R&S NRP data sheet (PD 0757.7023.21), sensors R&S NRP-Z11/-Z21.

Accessories

See the R&S NRP data sheet (PD 0757.7023.21).

Ordering information

Description	Type	Order No.
Average Power Sensor 200 pW to 200 mW; 9 kHz to 6 GHz	R&S NRP-Z91	1168.8004.02

