



ABN 43 064 478 842

➤ 231 osborne avenue clayton south, vic 3169
PO box 1548, clayton south, vic 3169
t 03 9265 7400 f 03 9558 0875
freecall 1800 680 680
www.tmgtestequipment.com.au

Test & Measurement

- sales
- rentals
- calibration
- repair
- disposal

Complimentary Reference Material

This PDF has been made available as a complimentary service for you to assist in evaluating this model for your testing requirements.

TMG offers a wide range of test equipment solutions, from renting short to long term, buying refurbished and purchasing new. Financing options, such as Financial Rental, and Leasing are also available on application.

TMG will assist if you are unsure whether this model will suit your requirements.

Call TMG if you need to organise repair and/or calibrate your unit.

If you click on the “Click-to-Call” logo below, you can call us for FREE!

TMG Corporate Website

TMG Products Website



Click-to-Call
TMG Now



Disclaimer:

All trademarks appearing within this PDF are trademarks of their respective owners.





Version
01.00

April
2007

R&S®ZVL Vector Network Analyzer

The cost-efficient compact class in network analysis

- ◆ Wide frequency range:
9 kHz to 3 GHz/6 GHz
- ◆ Wide dynamic range:
>115 dB, typ. 123 dB
- ◆ Bidirectional test set:
display of all four S-parameters
- ◆ Complete spectrum analyzer as an option
- ◆ Accurate power measurement
(USB connector for R&S®NRP power sensor)
- ◆ Compact size and low weight (<7 kg)
- ◆ 12 V DC operation and internal battery

Optionally with spectrum analyzer

Versatile – compact – future-proof





- ◆ **Network and spectrum analysis** in a single instrument
- ◆ **Bidirectional test set** for displaying all four S-parameters
- ◆ **Multitrace display** for displaying all relevant parameters
- ◆ **Operation with mouse or hardkeys/softkeys** – convenient user interface with wizards and context menus
- ◆ **Online help** – context-sensitive with remote-control commands
- ◆ **Undo/Redo softkey** for reversing up to six preceding operating steps
- ◆ **USB connector** for R&S®NRP power sensor for precise power measurements
- ◆ **Small and compact** – 37 cm instrument depth suitable for every workbench
- ◆ **Lightweight and portable** with a weight <7 kg

Versatile solution

The R&S®ZVL is a compact, powerful, and future-proof network analyzer, and is therefore ideal for use in development, production, and service.

It is the only instrument to combine the functions of a network analyzer, spectrum analyzer, and power meter in a single box, and will thus tremendously increase your work efficiency.

The R&S®ZVL is ideal for lab applications where the measurement tasks vary frequently; it can be used to measure S-parameters as well as the output spectrum, ACP, and TOI without having to reconnect the device under test (DUT). With the R&S®ZVL, production lines can now be run even more flexible, as the switchover from network analyzer to spectrum analyzer can easily be effected via remote control. Moreover, an R&S®NRP power sensor, which can be directly connected to the R&S®ZVL, ensures precise power measurements.

Favorable price and high performance reduce costs


The R&S®ZVL combines a wide dynamic range and excellent measurement speed with versatile functionality. The segmented sweep, the multitrace display, and the powerful marker and trace evaluation are only some examples of the functions that speed up measurement sequences and reduce tuning and measurement times. The price/performance ratio of the R&S®ZVL makes the instrument unique among the compact network analyzers in its class.

Compact dimensions and low weight save space and facilitate mobile operation

Weighing less than 7 kg and featuring an instrument depth of only 37 cm, the R&S®ZVL is by far the most compact instrument in its class. It is easy to carry and does not require much space on your workbench. And as the R&S®ZVL can be battery-operated, it is ideal for mobile applications.

Upgradeability and compatibility within the instrument family protect your investment

No matter what the challenge, the R&S®ZVL quickly takes it on and thus grows with the demands. You can install hardware options as needed on-site in line with the plug & play concept. The user interface and the remote-control command set of the R&S®ZVL are similar to those of the R&S®ZVB and R&S®ZVA. Thus, these network analyzers are interchangeable in development and production – eliminating the need to familiarize yourself with a completely new instrument or to invest in new remote-control programs.

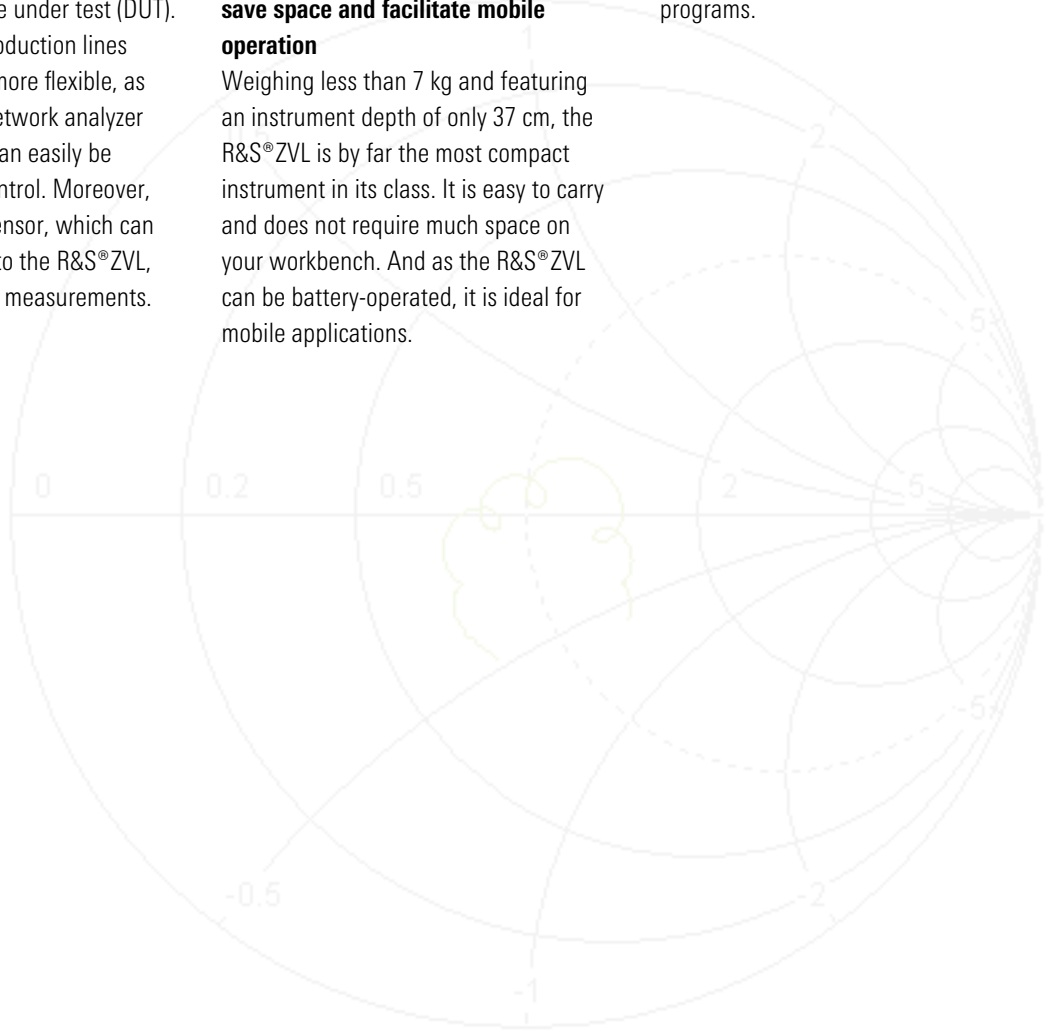


All-in-one solution

Wide scope of functions

Offering excellent specifications and a wide range of functions at a favorable price, the R&S®ZVL is every development engineer's ideal network analyzer.

- ◆ Wide dynamic range for characterizing filters of high rejection
- ◆ High power-handling capability of its receivers for analyzing active devices
- ◆ Integrated step attenuator for measurements on devices with up to 27 dBm output power
- ◆ Compact size for optimal utilization of the work space
- ◆ Simultaneous display of all relevant DUT parameters for fast tuning
- ◆ Possible connection of an R&S®NRP power sensor for precise power measurement (R&S®FSL-K9 option)
- ◆ Optional spectrum analysis with the R&S®FSL scope of functions
 - Channel and adjacent channel power measurement
 - Measurement of occupied bandwidth
 - CCDF measurement (amplitude statistics of signals)
 - 20 MHz I/Q demodulation bandwidth
- ◆ Other spectrum analysis options are in preparation

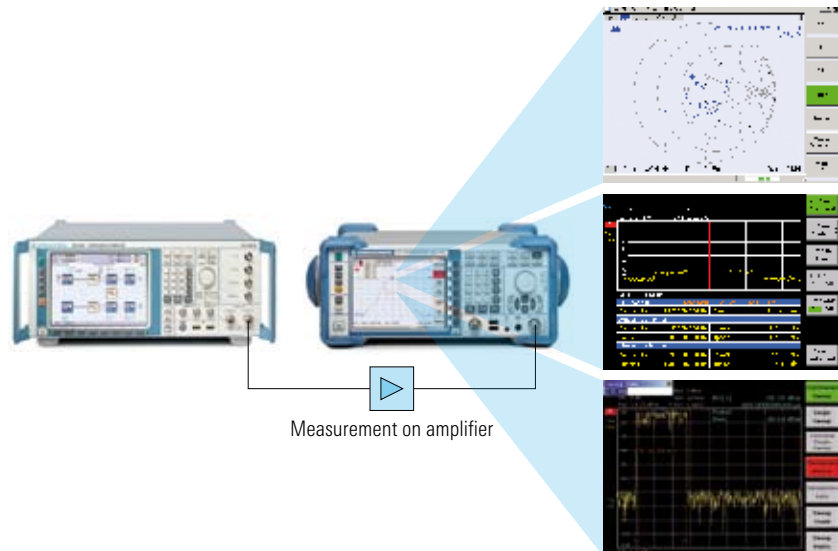

Universal tool for installation and service

- ◆ Performance of sophisticated measurement tasks by offering network analysis, spectrum analysis, and power measurement in a single box
- ◆ Convenient loading of instrument setups with pass/fail criteria from the hard disk or USB stick
- ◆ Operation independent of AC supply due to an optional internal battery or 12 V car supply system

- ◆ Easy transportation owing to compact size and low weight
- ◆ Shock-resistant housing and ergonomic carrying handle
- ◆ Carrying bag for accessories such as additional batteries, power sensors, and calibration standards



High throughput in production


Dynamic range and speed for complex DUTs

Large measurement bandwidths up to 500 kHz and fast synthesizers make for short measurement times and thus high throughput in manual tuning and automated production sequences. Due to the analyzer's wide dynamic range at large measurement bandwidths, this advantage in speed does not affect measurement accuracy. The R&S®ZVL is thus the ideal tool for measuring and tuning selective DUTs such as duplex filters for base stations.

Sweep modes adapted to the task reduce measurement time

Using different sweep modes, the R&S®ZVL achieves optimal measurement times for a wide range of DUTs:

- ◆ For narrowband DUTs such as bandpass filters, the linear sweep with equidistant measurement points is the most suitable solution. Depending on the DUT, the number of measurement points can be selected between 2 and 4001
- ◆ The R&S®ZVL measures broadband DUTs such as cables or lowpass filters within a minimum of time by using the logarithmic sweep. In this case, the step size is proportional to the current measurement frequency
- ◆ The segmented sweep is ideal for filter tuning. It allows the test point spacing, measurement bandwidth, and source power to be specifically set for different frequency segments. By selecting the appropriate setting in the passband and the stopband, minimum sweep times, and maximum dynamic range, and accuracy can be achieved

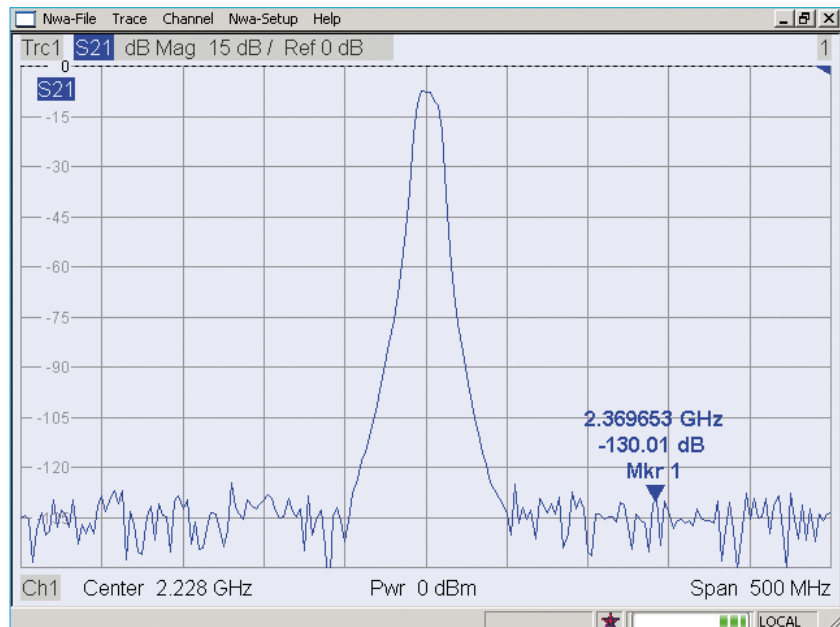


Dynamic range at 10 Hz IF bandwidth

Multitrace display for faster DUT characterization

Several traces can be combined in diagrams as required and assigned to different measurement channels¹⁾. Thus, the R&S®ZVL characterizes DUTs using a

¹⁾ A measurement channel refers to an independent set of test parameters including, for example, sweep mode, test point spacing, power, measurement bandwidth, and calibration.

variety of stimulus conditions, and simultaneously displays all relevant parameters on the screen. The names of the traces and channels can be edited and replaced by user-specific names to make them easy to identify. The number of traces is limited only by the instrument's RAM capacity; more than 100 traces are available for remote-control applications, for example.

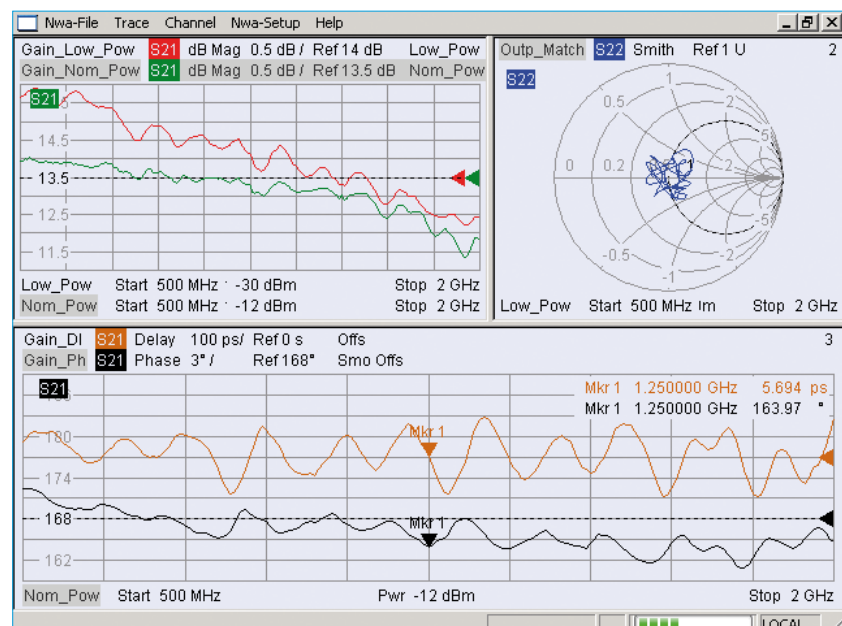


Multitrace display

Easy and intuitive operation

User-friendly and error-tolerant even for complex measurement tasks

The R&S®ZVL features the tried-and-tested operating concept of the R&S®ZVA and R&S®ZVB high-end network analyzers.

- ◆ Control by mouse or hardkeys/softkeys (whichever you prefer)
- ◆ Dialogs and wizards for complex functions quickly guide you step by step to the required measurement
- ◆ Undo/Redo function for canceling up to six operating steps – including a preset, for reversing operating errors and for fast switching between two modes

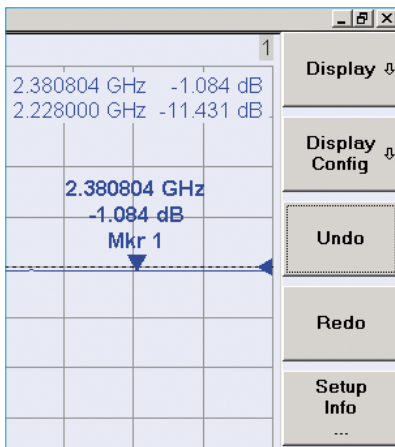

- ◆ Context-sensitive help including detailed description of the active function and display of the associated remote-control commands supports also untrained users and simplifies programming

Trace evaluation and marker functions facilitate manual filter tuning

A wide range of trace evaluation and marker functions support the tuning of complex DUTs, such as duplex filters for base stations.

- ◆ Up to 10 markers per trace in different output formats such as magnitude and phase, impedance, admittance, or VSWR
- ◆ Marker output formats can be selected independent of the trace format
- ◆ User-specific names for markers and traces
- ◆ Trace evaluation functions for user-definable frequency ranges such as max, min, RMS, peak to peak, bandwidth, quality, etc (see figure below)
- ◆ Marker and pass/fail information windows that can be shifted and adjusted in size
- ◆ Output of the marker information at the marker position, in the marker info field in the diagram, or as a table

Easy export and import of measurement results for quick documentation or comparison with a golden device

To make documentation easy, the R&S®ZVL provides different graphical and data formats for exporting measurement results. Moreover, data compiled with external tools can be loaded. For this purpose, the R&S®ZVL provides different formats and interfaces:

- ◆ Storage of measurement results internally to the hard disk or externally to a USB memory stick
- ◆ Export of hard copies in *.BMP, *.WMF, or *.EMF format
- ◆ Export of memory and measurement traces, e.g. as Touchstone or ASCII files for further processing in spreadsheet analysis programs, MATLAB®, or simulation programs
- ◆ Import of Touchstone files as memory trace to compare the current measurements with simulations
- ◆ Import of ASCII or Touchstone files as limit lines



Functions and options

Network analysis

Function	Description
Measured quantities	S-parameters (S11, S12, S21, S22), impedance, admittance, stability
Measurement formats	dB mag, lin mag, phase, polar, real, imag., Smith chart, group delay, SWR, inverted Smith chart, unwrapped phase
Markers	Ten markers per trace; display in different formats; size and position of the display windows can be changed using the mouse; editable names
Marker search	Coupled markers, max, min, peak, target
Trace evaluation	Max, min, peak to peak, RMS, mean, standard deviation, electrical length, phase delay, for up to ten definable stimulus ranges
Bandfilter search	Bandwidth, quality, attenuation, center frequency; evaluation referenced to maximum or marker value
Calibration method	Transmission and reflection normalization, OSM (full one-port), TOSM (full two-port), one-path two-port
Traces, channels, and diagrams	Unlimited number ¹⁾ of traces and channels, overlay display of traces also of different channels in one diagram, editable names, coupled scaling of different traces
Online help	Context-sensitive help including remote-control command documentation
Sweep modes	Linear, logarithmic, segmented, for optimal distribution of measurement points, and bandwidth and power optimization
Limit lines	Upper/lower, unlimited number of segments, use of traces as limit lines, graphical evaluation of pass/fail test, global limit test across all channels
Trace mathematics	Data/Mem, Data-Mem
Remote-control compatibility	Compatible with the R&S®ZVA, R&S®ZVB, and instruments from other manufacturers
Export of screen hardcopy	*.WMF *.EMF, *.BMP
Data export/import	*.SNP, *.CSV, *.DAT, can be read and displayed in memory traces
Power measurement (R&S®FSL-K9 option with R&S®ZVL-K1)	Connection of an R&S®NRP power sensor directly to the USB interface
Undo/Redo	Reversal of up to six operating steps including preset
Calibration manager	Storage of calibration data independent of instrument setup, assignment of stored calibration data to traces and channels
Offset	Automatic or manual shifting of the reference plane by a specific electrical or mechanical length; determination of phase linearity

¹⁾ Limited by RAM.

Spectrum analysis

Function	Description
Level units	dBm, dBμV, dBmV, dBμA, dBpW, V, W, A
Full selection of detectors	RMS, quasi peak, average, auto peak, pos. peak, neg. peak, sample
TOI measurement	Determination of third-order intercept point (IP3), automatic recognition of data carriers and determination of intermodulation sidebands
Harmonic distortion	Automatic determination of harmonic distortion
Noise measurement (noise marker)	Noise measurement in dBm (1 Hz) using the noise marker, taking into account all necessary corrections such as filter noise bandwidth, detector used, and averaging
Phase noise measurement	Phase noise measurement in dBc (1 Hz) with selectable carrier offset using the phase noise marker, taking into account all necessary corrections such as filter noise bandwidth, detector used, and averaging
Channel and adjacent channel power measurement	Power measurement within a definable channel bandwidth by means of trace integration (IBW method); use of the RMS detector to ensure good repeatability and accuracy; setting of channel width by selecting from a list of different transmission standards or by user selection; entry of different widths for channels and adjacent channels and channel spacing for up to twelve channels and three adjacent channels
Fast adjacent channel power measurement	Adjacent channel power measurement with standard-specific channel filters such as RRC filters in the time domain, reduction of measurement time by up to a factor of ten, easy measurement of the transient, time-dependent adjacent channel power
Burst power measurement (time domain power)	Measurement of the burst power in the time domain; display lines limit the evaluation range, e.g. to determine the power during the 147 useful bits of the GSM burst
Occupied bandwidth (OBW)	Measurement of the bandwidth occupied by a signal (for this purpose, the analyzer determines the channel bandwidth where 99 % of the overall power occur, for example; fully synchronous frequency sweep and high number of trace points ensure high measurement accuracy)
Frequency counter	Exact determination of the signal frequency on the marker position with 1 Hz resolution
Carrier/noise ratio (C/N)	Determination of the carrier-to-noise ratio referenced to 1 Hz bandwidth or a selectable bandwidth



Hardware options of the R&S® ZVL

- ❶ Battery pack (R&S® FSL-B31)
- ❷ DC power supply (R&S® FSL-B30)
- ❸ IEC/IEEE (GPIB) bus interface (R&S® FSL-B10)
- ❹ OCXO (R&S® FSL-B4)
- ❺ Additional interfaces (R&S® FSL-B5)

Specifications in brief

Network analysis

Frequency range	9 kHz to 3 GHz/6 GHz (typ. 5 kHz)
Measurement time (201 measurement points, full two-port-calibrated)	<75 ms
Data transfer (201 measurement points)	
Via RSIB over 100 Mbit/s LAN	1.5 ms
Dynamic range at 10 Hz measurement bandwidth	>115 dB, typ. 123 dB
Output power	>0 dBm, typ. +10 dBm
Measurement bandwidths	10 Hz to 500 kHz in 1/2/5 steps
Weight (without battery)	<7 kg (15.43 lb)
Number of channels, diagrams, and traces	>100 ¹⁾
Number of measurement points per trace	2 to 4001
Operating system	Windows XP

Spectrum analysis

Frequency range	9 kHz to 3 GHz/6 GHz
Frequency uncertainty	1×10^{-6}
With R&S®FSL-B4 option	1×10^{-7}
Resolution bandwidths	
Standard	300 Hz to 10 MHz in 1/3 steps, 20 MHz at zero span
With R&S®FSL-B7 option	(1 Hz) 10 Hz to 10 MHz in 1/3 steps
Video bandwidths	10 Hz to 10 MHz
I/Q demodulation bandwidth	20 MHz
Typical phase noise at 500 MHz	–100 dBc (1 Hz), 10 kHz carrier offset
Displayed average noise level	
Without preamplifier at 1 GHz	<–140 dBm (1 Hz)
With preamplifier at 1 GHz	<–156 dBm (1 Hz), typ. –163 dBm (1 Hz)
IP3	>+5 dBm, typ. +12 dBm
Detectors	pos/neg peak, auto peak, RMS, quasi peak, average, sample
Level measurement uncertainty (95 % confidence level)	<0.5 dB

¹⁾ Limited by RAM.

Ordering information

Designation	Type	Frequency range	Order No.
Vector Network Analyzer, 3 GHz	R&S®ZVL3	9 kHz to 3 GHz	1303.6509.03
Vector Network Analyzer, 6 GHz	R&S®ZVL6	9 kHz to 6 GHz	1303.6509.06
Options			
OCXO Reference Frequency	R&S®FSL-B4		1300.6008.02
GPIO Interface	R&S®FSL-B10		1300.6208.02
DC Power Supply, 12 V to 28 V	R&S®FSL-B30		1300.6308.02
NiMH Battery Pack ¹⁾	R&S®FSL-B31		1300.6408.02
Spectrum Analysis for R&S®ZVL	R&S®ZVL-K1		1306.0301.01
Additional Interfaces for spectrum analysis option ²⁾	R&S®FSL-B5		1300.6108.02
Narrow Resolution Filters, 10 Hz to 300 Hz, for spectrum analysis option ²⁾	R&S®FSL-B7		1300.5601.02
RF Preamplifier for spectrum analysis option ²⁾	R&S®FSL-B22		1300.5953.02
R&S®NRP Power Sensor Support for spectrum analysis option ²³⁾	R&S®FSL-K9		1301.9530.02
Extras			
Test Cable (50 Ω) ⁴⁾			
N(m)/N(m), 25", 630 mm/38", 960 mm (high precision)	R&S®ZV-Z91	0 Hz to 18 GHz	1301.7572.25/38
N(m)/3.5 mm (f), 25", 630 mm/38", 960 mm (high precision)	R&S®ZV-Z92	0 Hz to 18 GHz	1301.7589.25/38
N(m)/N(m), 24", 610 mm/36", 910 mm	R&S®ZV-Z191	0 Hz to 18 GHz	1306.4507.24/36
N(m)/3.5 mm (f), 24", 610 mm/36", 910 mm	R&S®ZV-Z192	0 Hz to 18 GHz	1306.4513.24/36
Calibration Kits			
N 50 Ω	R&S®ZV-Z21	0 Hz to 18 GHz	1085.7099.02
N 50 Ω	R&S®ZCAN	0 Hz to 3 GHz	0800.8515.52
N 75 Ω	R&S®ZCAN	0 Hz to 3 GHz	0800.8515.72
PC 3.5	R&S®ZV-Z32	0 Hz to 26.5 GHz	1128.3501.02
PC 3.5 (incl. sliding matches)	R&S®ZV-Z33	0 Hz to 26.5 GHz	1128.3518.02
Matching Pad 75 Ω, L section	R&S®RAM	0 Hz to 2.7 GHz	0358.5414.02
Matching Pad 75 Ω, series resistor 25 Ω	R&S®RAZ	0 Hz to 2.7 GHz	0358.5714.02
Matching Pad 75 Ω, L section, N to BNC	R&S®FSH-Z38	0 Hz to 1 GHz	1300.7740.02
Instruments and test equipment			
19" Rackmount Adapter	R&S®ZZA-S334		1109.4487.00
Soft Carrying Bag	R&S®FSL-Z3		1300.5401.00
Additional Charger Unit	R&S®FSL-Z4		1300.5430.02
Power sensors²⁵⁾			
Average Power Sensor 200 mW	R&S®NRP-Z11	10 MHz to 8 GHz	1138.3004.02
Average Power Sensor 200 mW	R&S®NRP-Z21	10 MHz to 18 GHz	1137.6000.02
Average Power Sensor 2 W	R&S®NRP-Z22	10 MHz to 18 GHz	1137.7506.02
Average Power Sensor 15 W	R&S®NRP-Z23	10 MHz to 18 GHz	1137.8002.02
Average Power Sensor 30 W	R&S®NRP-Z24	10 MHz to 18 GHz	1137.8502.02
Average Power Sensor 200 mW	R&S®NRP-Z91	9 kHz to 6 GHz	1168.8004.02
Thermal Power Sensor 100 mW	R&S®NRP-Z51	0 Hz to 18 GHz	1138.0005.02
Thermal Power Sensor 100 mW	R&S®NRP-Z55	0 Hz to 40 GHz	1138.2008.02

¹⁾ Requires R&S®FSL-B30.

²⁾ Requires R&S®ZVL-K1 spectrum analysis option.

³⁾ Requires R&S®NRP power sensor with R&S®NRP-Z3/4.

⁴⁾ One cable.

⁵⁾ Requires R&S®FSL-K9.



For specifications, see PD 5213.8150.22
and www.rohde-schwarz.com
(search term: ZVL)



ROHDE & SCHWARZ

www.rohde-schwarz.com

Europe: +49 1805 12 4242, customersupport@rohde-schwarz.com
USA and Canada: +1-888-837-8772, customer.support@rsa.rohde-schwarz.com
Asia: +65 65 130 488, customersupport.asia@rohde-schwarz.com