



ABN 43 064 478 842

➤ 231 osborne avenue clayton south, vic 3169
PO box 1548, clayton south, vic 3169
t 03 9265 7400 f 03 9558 0875
freecall 1800 680 680
www.tmgtestequipment.com.au

Test & Measurement

- sales
- rentals
- calibration
- repair
- disposal

Complimentary Reference Material

This PDF has been made available as a complimentary service for you to assist in evaluating this model for your testing requirements.

TMG offers a wide range of test equipment solutions, from renting short to long term, buying refurbished and purchasing new. Financing options, such as Financial Rental, and Leasing are also available on application.

TMG will assist if you are unsure whether this model will suit your requirements.

Call TMG if you need to organise repair and/or calibrate your unit.


If you click on the “Click-to-Call” logo below, you can call us for FREE!

TMG Corporate Website

TMG Products Website



Click-to-Call
TMG Now

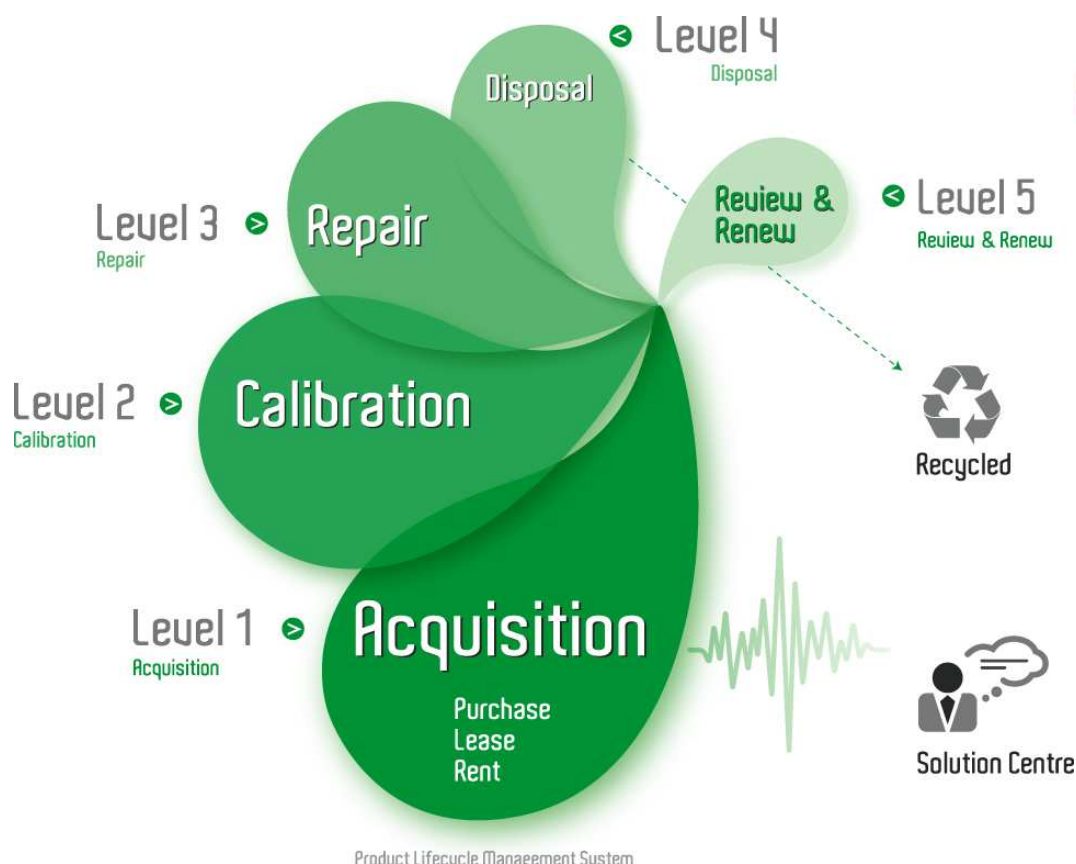


Disclaimer:

All trademarks appearing within this PDF are trademarks of their respective owners.



BM11D and BM21

5-kV Insulation Resistance Testers

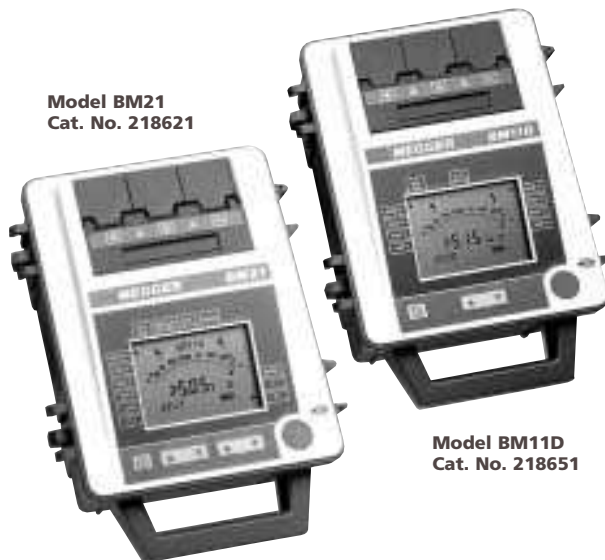

- **Analog/digital display**
- **Multiple test voltages**
- **Integral timer**
- **Automatic discharge of equipment under test**

DESCRIPTION

The Megger BM11D and BM21 5-kV Insulation Resistance Testers are portable, battery-powered, high-voltage instruments that use the latest electronic design and technology. The instruments have user-friendly keypads with push-buttons to select test voltages of 500, 1000, 2500, and 5000 V dc. In addition to the standard test voltages, a variable voltage feature on the BM21 selects test voltages between 25 and 5000 V dc in 25-V steps.

An integral timer automatically controls the duration test and stops the output voltage when the preset time has expired.

Analog/digital displays offer practicality and precision. The analog/digital LCD on the BM11D displays from 100 k Ω to 1 T Ω in all test voltages. On the BM21, the analog/digital LCD displays readings of insulation resistance to 5 T Ω , leakage current to below 1 nA, and capacitance to 10 μ F. The analog scale rapidly identifies insulation condition and monitors variable measurements. The digital display complements the analog scale by simultaneously displaying an easy-to-read, precise measurement.

As a safety feature, these testers act as an ac/dc safety voltmeter, indicating the level of applied voltage before a test and monitoring discharge voltage after a test. For added safety, an alarm warns the operator if the circuit under test has not been de-energized.

Both testers incorporate a guard terminal to eliminate the effects of surface leakage in the item under test, thus ensuring accurate measurements.

APPLICATIONS

The BM11D and BM21 test the insulation resistance of:

- High-voltage power cables
- Large motor/generator windings
- Line and substation transformers
- High-voltage buses

Both instruments perform spot tests, step-voltage tests, and dielectric absorption tests for the following applications:

- Acceptance testing at installation to check conformance to specifications.
- Routine preventative/predictive maintenance testing after installation.
- Quality assurance testing as part of the manufacturing process.
- Diagnostic testing to isolate faulty components for repair.

The BM11D and BM21 detect high- or low-resistance grounds and short circuits in apparatus, cables, wiring, caused by moisture, oil, dirt, corrosion, damage to insulation or natural deterioration. The units determine the presence of moisture, solvents and semiconducting foreign materials in wires, cables and other conductors, and in built-up insulation systems such as those found in motor windings.

A series of measurements taken over time and recorded on test record cards show the gradual decline in the integrity of the insulation during its operational life. The maintenance engineer or technician uses this information to anticipate future performance and to plan for repairs. These recorded measurements also show improvements in the insulation of motor, transformer, and generator windings that result from drying-out procedures after exposure to excessive humidity or water.

FEATURES AND BENEFITS

- Simple, push-button operation is user-friendly and easy to use.
- Analog/digital LCD enables direct reading in all ranges.
- Lock-down TEST button and integral timer are useful for extended tests such as polarization index.
- Rechargeable, battery-powered instrument is useful anywhere because of its portability.
- Automatic discharge of capacitive test sample charge promotes user safety.
- Guard terminal eliminates surface leakage current from the measurement.

SPECIFICATIONS

Nominal Test Voltage (dc)

BM11D 500, 1000, 2500, 5000 V

BM21 500, 1000, 2500, 5000 V; plus 25 - 5000 V in 25-V steps

Accuracy at 68°F (20°C)

±5% on 100 mΩ load

Insulation Resistance Range

BM11D

Digital 10 kΩ to 50 GΩ @ 500 V
 10 kΩ to 100 GΩ @ 1000 V
 10 kΩ to 250 GΩ @ 2500 V
 10 kΩ to 500 GΩ @ 5 kV
 Analog 100 kΩ to 1 TΩ @ all voltages

BM21

Digital 10 kΩ to 500 GΩ @ 500 V
 10 kΩ to 1 TΩ @ 1000 V
 10 kΩ to 2.5 TΩ @ 2500 V
 10 kΩ to 5 TΩ @ 5 kV
 Analog 100 kΩ to 1 TΩ @ all voltages

Accuracy at 68°F (20°C)

BM11D

±5% of reading 1 MΩ to 100 GΩ @ 5 kV

BM21

±5% of reading 1 MΩ to 1 TΩ @ 5 kV

Voltage Range

BM11D 50 to 1000 V dc or ac

BM21 50 to 1000 V dc or ac
 (0 to 5000 V dc when testing)

Accuracy at 68°F (20°C)

±2%, ±1 V

Leakage Current Measurement

BM11D None

BM21 0.01 nA to 999 mA; Accuracy ±5% ±0.2 nA

Capacitance Measurement

BM11D None

BM21 0.01 to 10.0 μF

Timer

BM11D Automatic; 0 to 60 minutes

BM21 User selectable; 0 to 90 minutes

Short Circuit Current

2 mA nominal

Display

Analog/digital

Interference Rejection

1 mA r.m.s. per kV to a maximum 2 mA

Temperature Range

Operating: -4 to +122°F (-20 to +50°C)

Storage: -13 to +149°F (-25 to +65°C)

Humidity Range

90% RH @ 104°F (40°C)

Power Supply

Two rechargeable, sealed lead-acid batteries (12 V, 2 Ah)

Battery Life

Typically 8 hours continuous, built-in charger operating from 95 to 265 V ac

50/60 Hz

Charging Time

16 hours

Low Battery Indication

Comprehensive battery state indicator

Dimensions

6 H x 10 W x 14 D in.
 (152 H x 250 W x 350 D mm)

Weight

13 lb (5.6 kg) approximate

ORDERING INFORMATION

Item (Qty)	Cat. No.
BM11D 5 kV Insulation Resistance Tester	218651
BM21 5 kV Insulation Resistance Tester	218621
Included Accessories	
Three test leads, 10 ft (3 m)	210968
Test record cards, universal	210954
Charging cord	17032
Instruction manual	AVTMBM11D
Optional Accessory	
Carrying case	218748

UK
 Archcliffe Road, Dover
 CT17 9EN England
 T (0) 1 304 502101
 F (0) 1 304 207342

UNITED STATES
 4271 Bronze Way
 Dallas, TX 75237-1018 USA
 T 1 800 723 2861
 T 1 214 333 3201
 F 1 214 331 7399

OTHER TECHNICAL SALES OFFICES
 Norristown USA, Toronto CANADA,
 Mumbai INDIA, Paris FRANCE,
 Sidney AUSTRALIA,
 Guadalajara SPAIN and
 The Kingdom of BAHRAIN.

ISO STATEMENT
 Registered to ISO 9001:1994 Reg no. Q 09250
 Registered to ISO 14001 Reg no. EMS 61597
BM11D_BM21_DS_en_V11
 www.megger.com
 Megger is a registered trademark