



ABN 43 064 478 842

231 Osborne Avenue Clayton South, VIC 3169  
PO Box 1548, Clayton South, VIC 3169  
t 03 9265 7400 f 03 9558 0875  
freecall 1800 680 680  
www.tmgtestequipment.com.au

## Test & Measurement

- > sales
- > rentals
- > calibration
- > repair
- > disposal

## Complimentary Reference Material

This PDF has been made available as a complimentary service for you to assist in evaluating this model for your testing requirements.

TMG offers a wide range of test equipment solutions, from renting short to long term, buying refurbished and purchasing new. Financing options, such as Financial Rental, and Leasing are also available on application.

TMG will assist if you are unsure whether this model will suit your requirements.

Call TMG if you need to organise repair and/or calibrate your unit.

If you click on the "Click-to-Call" logo below, you can call us for FREE!

TMG Corporate Website

TMG Products Website



Click-to-Call  
TMG Now



Product Lifecycle Management System

### Disclaimer:

All trademarks appearing within this PDF are trademarks of their respective owners.






# R&S®FSL

## Spectrum Analyzer

High-end functions in an extremely lightweight, compact package

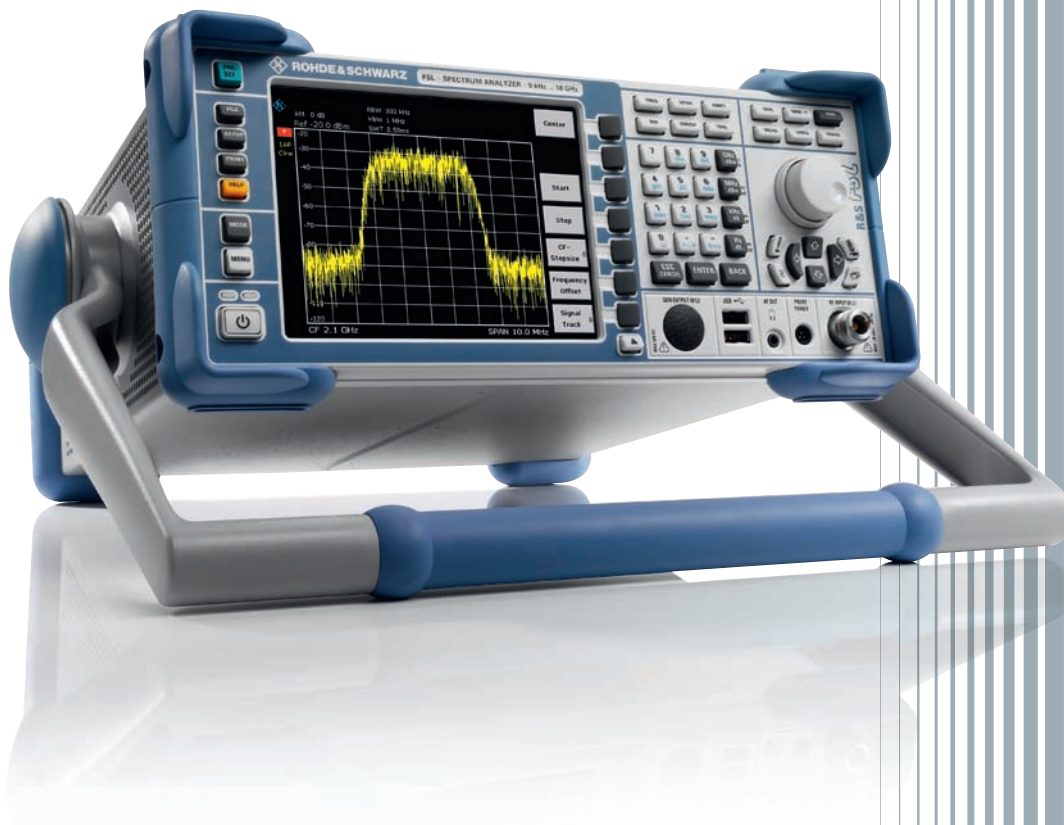

**75** Years of  
Driving  
Innovation



**ROHDE & SCHWARZ**

# R&S®FSL

## Spectrum Analyzer

### At a glance

You no longer have to make compromises when buying a spectrum analyzer. You can now get high-end features without stretching your budget – the R&S®FSL.

The R&S®FSL is an extremely lightweight and compact spectrum analyzer that is ideal for a large number of applications in development, service and production. Despite its compact size, it offers a wealth of functions more typical of the high-end range, thus ensuring an excellent price/performance ratio. The R&S®FSL is the only instrument in its class that features a tracking generator up to 18 GHz and can analyze signals with a bandwidth of 28 MHz. In addition, the R&S®FSL18, which operates at frequencies up to 18 GHz, supports applications in the microwave range.


The high-end approach is also evident in the operating features. When equipped with a tracking generator up to 18 GHz, the R&S®FSL18 is an easily portable, microwave scalar network analyzer. As with the higher-class analyzers from Rohde&Schwarz, the main functions of the R&S®FSL are directly accessible by fixed-assignment function keys, with additional functions accessed using softkeys and tables. This shortens the learning curve for new users. Its compact size and low weight, plus its optional battery pack, make the R&S®FSL ideal for mobile use.

The R&S®FSL has unique plug&play upgrade abilities. All options can be added without opening the instrument.

#### Main features

- Frequency range 9 kHz to 3 GHz/6 GHz/18 GHz
- 3 GHz, 6 GHz and 18 GHz models with and without tracking generator
- Best RF characteristics in its class
- Largest signal analysis bandwidth in its class (28 MHz)
- Low measurement uncertainty, even in microwave range
- High resolution filter accuracy owing to all-digital implementation
- Robust and compact
- Carrying handle and low weight (<8 kg/18 lbs)
- Optional battery operation
- Wide range of functions, simple operation
- Easy on-site upgrading with options

The R&S®FSL is a full-featured analyzer with the widest demodulation bandwidth and the best RF characteristics in its class.

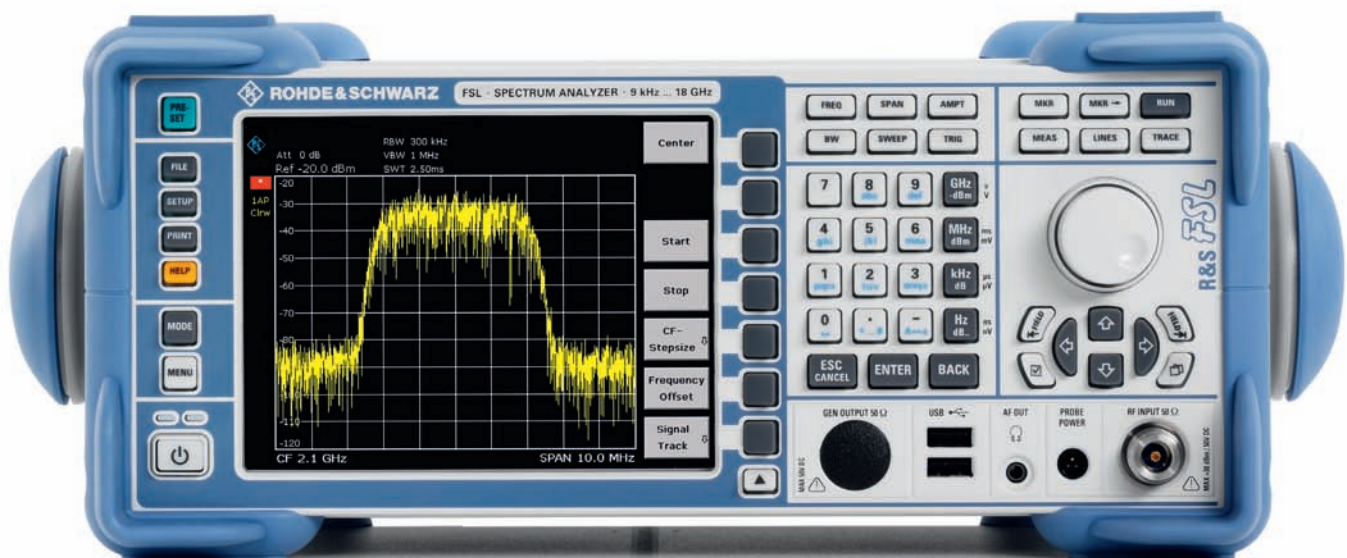

# R&S®FSL

## Spectrum Analyzer

### Benefits and key features

#### Exceptional performance for its class

- Continuous RF frequency range from 9 kHz to 18 GHz and 28 MHz demodulation bandwidth
  - Low measurement uncertainty even in microwave range
- ▷ [page 4](#)

#### Fast and versatile in production

- High measurement speed and time-saving routines improve throughput
  - Remote control via LAN or IEC/IEEE bus in line with SCPI
- ▷ [page 5](#)

#### At home in every development lab

- Excellent price/performance ratio
  - General-purpose signal analysis
  - Wide range of personalities for various wireless/cellular digital standards
- ▷ [page 6](#)

#### Lightweight and compact for on-site installation, maintenance and service

- Easy portability due to small size and low weight
  - Optional internal battery pack for cordless use
  - Power measurements with R&S®NRP-Zxx power sensors
- ▷ [page 7](#)

#### Easy upgrades and a wide range of interfaces

- On-site plug & play installation of options without opening the instrument
  - Additional interfaces expand the application range of the R&S®FSL
- ▷ [page 8](#)

#### Wide range of functions – simple operation

- Comprehensive set of measurement functions and features more typical of high-end analyzers
  - Built-in measurement routines and versatile selection of firmware options
- ▷ [page 9](#)

# Exceptional performance for its class

With phase noise of typ.  $-103$  dBc (1 Hz) at 10 kHz from the carrier, a third order intercept point of typ.  $+18$  dBm, a bandwidth range from 10 Hz to 10 MHz, and a displayed average noise level (DANL) of typ.  $-162$  dBm, the R&S®FSL compares favorably with high-end analyzers. This makes it very useful in production, service, field use and in labs. The RF attenuator, which is adjustable in steps of 5 dB, and the optional preamplifier ensure an optimum usable dynamic range.

## Continuous RF frequency range from 9 kHz to 18 GHz and 28 MHz demodulation bandwidth

The R&S®FSL is the only instrument in its class with a bandwidth of 28 MHz. Featuring an analysis bandwidth of 28 MHz, the spectrum analyzer is ideal for measuring both spectral and modulation parameters of broadband signals such as WLAN and WiMAX™, including harmonic signals up to 18 GHz. In the time domain, its fast digitizer allows the detection of pulsed signals and the measurement of pulse widths.

There are six different R&S®FSL models available (see page 21 for specifications):

- R&S®FSL3: 9 kHz to 3 GHz  
(available with and without tracking generator)
- R&S®FSL6: 9 kHz to 6 GHz  
(available with and without tracking generator)
- R&S®FSL18: 9 kHz to 18 GHz (20 GHz overrange, available with and without tracking generator)


The R&S®FSL18 covers frequencies up to 18 GHz, which makes it ideal for a large number of development, service and production applications at microwave frequencies. Examples include the installation and maintenance of radar systems and microwave links, as well as the production of microwave components or satellite surveillance.

## Low measurement uncertainty

Another unrivaled characteristic in its class is the low overall measurement uncertainty, which yields accurate and reliable results even in the microwave range.

The analyzer's low measurement uncertainty makes tests and alignment more accurate and reliable and allows a separate power meter to be replaced. Moreover, it reduces the margin needed for test instrument uncertainty and thus increases the margin left for the DUT.

Typical applications of the R&S®FSL18 include measurements in the microwave range, for example measuring the pulse width using the n-dB down marker.

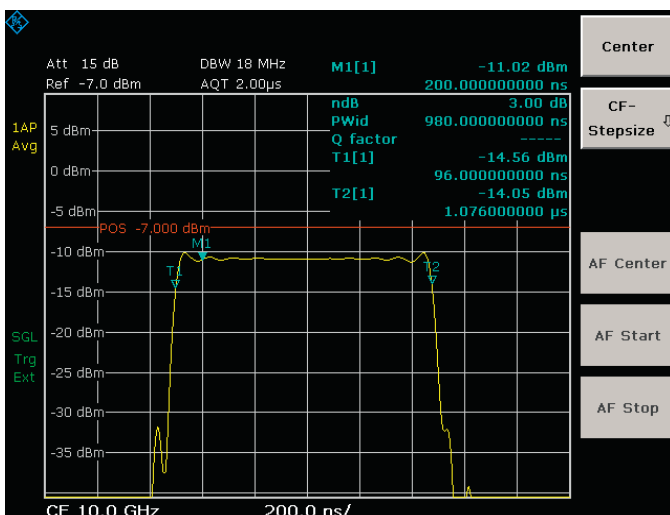

# Fast and versatile in production

The R&S®FSL is ideal for fast, easy measurements during production. A quick check of the level and frequency is often all that's needed.

The R&S®FSL's high speed of >80 sweeps/s in zero span, including remote output of data (or trace data), ensures high production throughput. Even a simple level calibration can be streamlined and accelerated with the R&S®FSL's integrated complex measurement functions – a special multisummary marker measures different levels in the time domain in a single sweep. This eliminates reset and remote control overhead time. For fast synchronization or triggering, the R&S®FSL-B5 additional interfaces option – which includes a special trigger interface – can be added.

In addition, the R&S®FSL offers the following functions:

- Fast ACP measurements in the time domain for the major wireless communications standards, with very good repeatability and short measurement times
- List mode: measurements with up to 300 analyzer settings with a single IEC/IEEE bus command
- Fast power measurement in the time domain using channel or RRC filters
- Fast frequency counter with 1 Hz resolution and measurement times <50 ms

## Remote control via LAN or IEC/IEEE bus in line with SCPI

The standard remote interface is a 10/100BaseT LAN interface that provides significantly higher speeds than an IEC/IEEE bus for transferring large data volumes. It also offers considerable cost advantages over IEC/IEEE bus wiring. However, IEC/IEEE bus remote control can be added by installing the R&S®FSL-B10 option.

The command set of the R&S®FSL follows SCPI conventions and is thus largely compatible with the R&S®FSP and R&S®FSU analyzers.

Remote control of the R&S®FSL via IEC/IEEE bus in list mode cuts down on measurement time.

### Input command

```
SENSE:LIST:POW
100MHz,-0dBm,10dB,10dB,NORM,1MHz,3MHz,434us,0,
200MHz,-20dBm,10dB,0dB,NORM,30kHz,100kHz,1ms,0,
300MHz,-20dBm,10dB,0dB,NORM,30kHz,100kHz,1ms,0;
```




### Output R&S® FSL

```
-28.3,
-30.6,
-38.1
```


# At home in every development lab

The R&S®FSL's excellent price/performance ratio makes it a must for every developer's lab bench, as indispensable as an oscilloscope or multimeter. Its range of functions and operation are largely identical with those of the R&S®FSU high-end analyzers, simplifying the reproducible verification of measurements.

- Good RF performance at a low price
- Widest I/Q demodulation bandwidth in its class
- Quasi-peak detectors and EMC bandwidths of 200 Hz, 9 kHz and 120 kHz for EMC checks during development and precompliance testing
- Tracking generator for transmission and reflection measurements (e.g. with the R&S®ZRB2 or R&S®FSH-Z2 VSWR bridge)
- High measurement accuracy
- Easy output of measurement results to USB printer, network printer or file
- Easy remote control via LAN
- Connection to MATLAB®

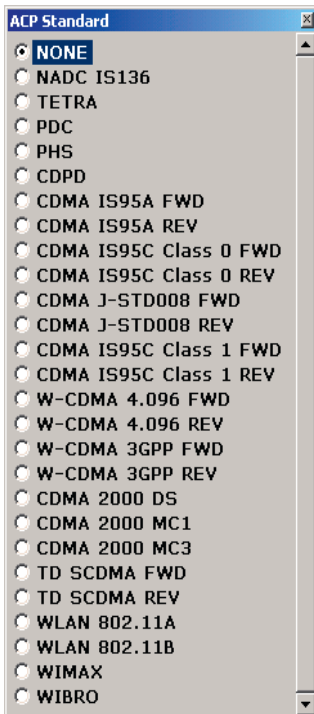

The R&S®FSL's wide scope of functions also extends to channel/adjacent channel power measurements. To simplify use, many default settings can be selected by pressing a button.

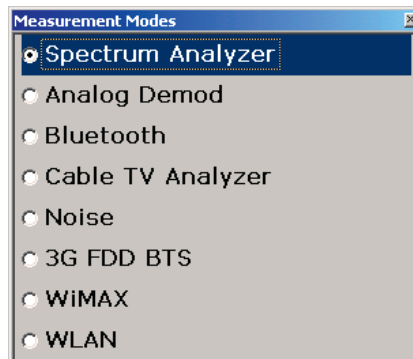

The R&S®FSL offers many different firmware options (see page 22). The user can switch between the different applications.



# Lightweight and compact for on-site installation, maintenance and service

The low weight (<8 kg), the small size and the ruggedized housing make the R&S®FSL ideal for mobile applications. Due to these properties it is easy to carry to remote or hard-to-reach locations. The carrying bag with space for an extra battery pack and accessories and the protective hardcover are also very convenient for field use.

## Optional internal battery pack for cordless use

When equipped with the optional internal battery pack (R&S®FSL-B31), the R&S®FSL can be used independent of the mains supply for at least one hour. Easy and fast battery exchange in the field increases battery operation time. In addition, a DC power supply (R&S®FSL-B30) is available for the R&S®FSL. This option allows the R&S®FSL to be used anywhere where DC power is available, e.g. in a car.

## Power measurements with R&S®NRP-Zxx power sensors

Another special feature of the R&S®FSL is the fact that you can directly connect a power sensor from the R&S®NRP-Z series. The R&S®FSL-K9 option and a connected power sensor allow very precise measurements of the DUT power – an enormous advantage for applications where level accuracy is crucial. The R&S®FSL can thus replace a power meter. This is particularly important in mobile applications.

## Ideal for service

- ▮ Cost-effectiveness
- ▮ High measurement accuracy
- ▮ Extensive evaluation options
- ▮ Wide range of functions
- ▮ Built-in frequency counter
- ▮ AM/FM audio demodulator for interference identification
- ▮ Extensive functions for power measurements
- ▮ Storage of settings and measurement results in the R&S®FSL or on a USB memory stick



Soft carrying bag for the R&S®FSL.


# Easy upgrades and a wide range of interfaces

The R&S®FSL has unique plug&play upgrade abilities. All options can be added without opening the instrument.

- ▮ No extra alignment after installation
- ▮ No recalibration
- ▮ No need to send in the instrument, thus negligible downtime
- ▮ No installation costs
- ▮ Easy installation of additional functions

The wide range of additional interfaces provided by the R&S®FSL-B5 option expands the application range of the R&S®FSL:

- ▮ IF output/video output for connecting further instruments
- ▮ 28 V, switchable for connecting noise sources
- ▮ Trigger interface for fast measurement on frequency lists
- ▮ Connector for an R&S®NRP-Zxx power sensor (replaces the USB adapter for the R&S®NRP-Zxx power sensors)

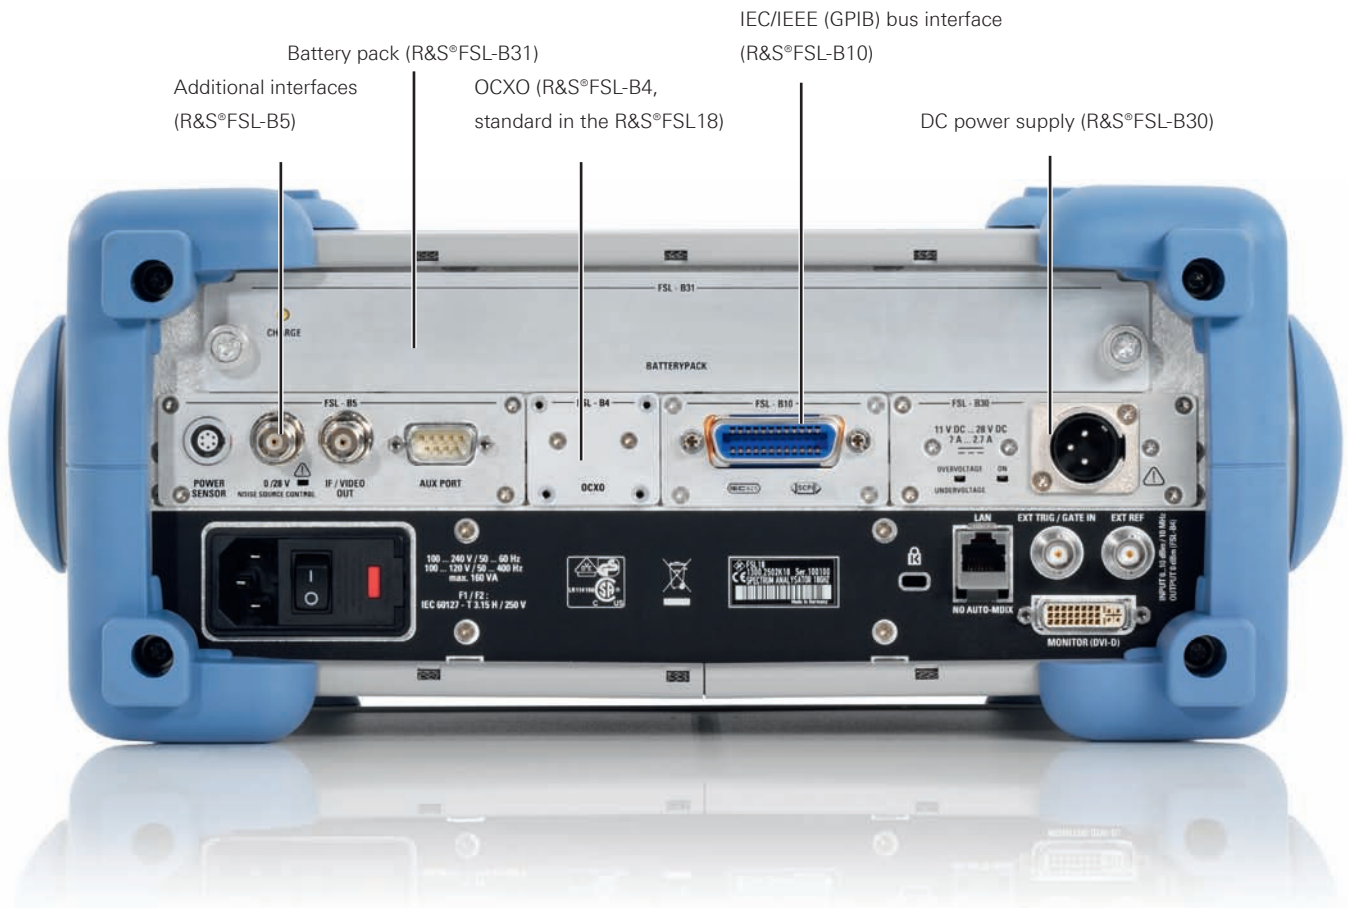

# Wide range of functions – simple operation

The R&S®FSL offers a comprehensive set of measurement functions and features that are more typical of high-end analyzers. A versatile selection of firmware options helps save costs as a low-budget spectrum analyzer can be used whenever the specifications of a high-end spectrum analyzer are not required. An intuitive user interface supports users with measurements in line with standards. In addition, preconfigured, built-in measurement routines help the user to quickly get results.

## Measurement routines for:

|   |
|---|
| Third order intercept measurement (TOI)   |
| Occupied bandwidth measurement (OBW)  |
| Time domain power measurement   |
| Channel power measurement (CP)  |
| Adjacent channel power and multicarrier adjacent channel power measurement (ACP and MC-ACP) |
| Fast adjacent channel power measurement (ACP)   |
| Carrier-to-noise ratio measurement (C/N, C/N <sub>0</sub> )                                 |
| Modulation depth measurement (AM%)  |

## Standard features


|                                   |
|-----------------------------------|
| 28 MHz I/Q demodulation bandwidth |
| Complete range of detectors       |
| RRC and channel filters           |
| FFT filters 1 Hz/300 Hz to 30 kHz |
| Frequency counter                 |
| Noise and phase noise markers     |
| n-dB down marker                  |
| Limit lines                       |
| Level units                       |
| Selectable number of trace points |
| Transducer factors                |
| LAN interface                     |
| USB                               |
| Help function                     |

## Application firmware for general-purpose signal analysis

|  |
|--|
| AM/FM/φM measurement demodulator (R&S®FSL-K7 option, page 14)        |
| Power measurement with R&S®NRP-Zxx power sensors (R&S®FSL-K9 option) |
| Spectrogram measurements (R&S®FSL-K14 option, page 13)               |
| Cable TV measurements (R&S®FSL-K20 option, page 16)                  |
| Noise figure and gain measurement (R&S®FSL-K30 option, page 17)      |
| TV trigger (R&S®FSL-B6 option, page 11)                              |
| Gated sweep (R&S®FSL-B8 option, page 11)                             |


## Application firmware for various wireless/cellular standards

|   |
|---|
| Bluetooth® modulation and spectrum measurements (R&S®FSL-K8 option, page 15)              |
| WCDMA (R&S®FSL-K72 option)  |
| CDMA2000®/1xEV-DO modulation and spectrum measurement (R&S®FSL-K82/-K84 options, page 18) |
| WLAN transmitter measurements (R&S®FSL-K91/-K91n options, page 19)                        |
| WiMAX™ modulation and spectrum measurements (R&S®FSL-K92/-K93 options)                    |

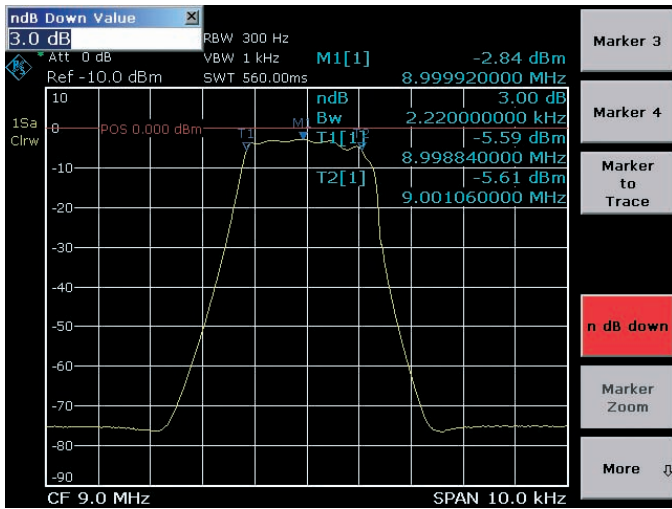


### Scalar network analysis

Models .13, .16 and .28 of the R&S®FSL, which include a tracking generator, can quickly and easily measure frequency response, filters and attenuation. The n-dB down marker determines the 3 dB bandwidth of a bandpass filter at the press of a button, for example. The R&S®FSL measures return loss or matching by using an external VSWR bridge. Precision is enhanced by Through, Short and Open normalization methods.

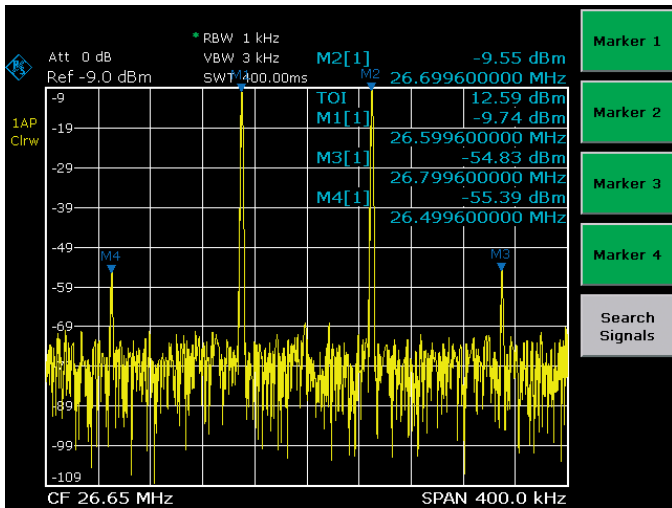

### Third order intercept (TOI)

The R&S®FSL can determine the TOI from the spectrum at the press of a button. It automatically detects the useful carriers and thus determines the intermodulation sidebands. The instrument's maximum dynamic range of 95 dB is high for its class. RF attenuation steps of 5 dB further enhance its usefulness.

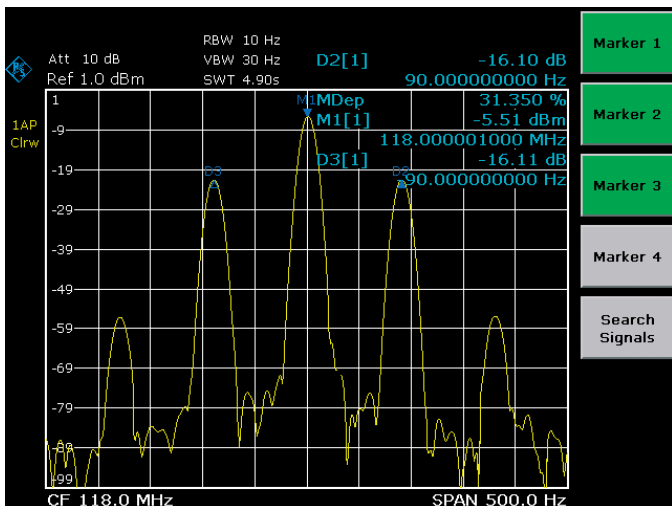


### Modulation depth measurement (AM%)

The R&S®FSL measures the modulation depth of an AM signal at the press of a button. The AM% marker function positions three markers – one each on the carrier, the upper sideband and the lower sideband – and uses the sideband suppression to determine the modulation depth. The modulation depth of a two-tone signal can be determined selectively by predefining the modulation frequency, for example by starting with a 90 Hz sideband and then moving to the 150 Hz sideband of an ILS signal. The high linearity of <0.2 dB ensures a small absolute measurement error.

|                  | Range 1   | Range 2   | Range 3   | Range 4   |
|------------------|-----------|-----------|-----------|-----------|
| Range Stop       | 150.0 kHz | 30.0 MHz  | 1.0 GHz   | 6.0 GHz   |
| Filter Type      | Gaussian  | Gaussian  | Gaussian  | Gaussian  |
| RBW              | 1.0 kHz   | 10.0 kHz  | 100.0 kHz | 1.0 MHz   |
| VBW              | 3.0 kHz   | 30.0 kHz  | 300.0 kHz | 3.0 MHz   |
| Sweep Time Mode  | Auto      | Auto      | Auto      | Auto      |
| Sweep Time       | 140.0 ms  | 300.0 ms  | 100.0 ms  | 40.0 ms   |
| Detector         | RMS       | RMS       | RMS       | RMS       |
| Ref. Level       | -20.0 dBm | -20.0 dBm | -20.0 dBm | -20.0 dBm |
| RF Att. Mode     | Auto      | Auto      | Auto      | Auto      |
| RF Attenuator    | 0.0 dB    | 0.0 dB    | 0.0 dB    | 0.0 dB    |
| Preamp           | Off       | Off       | Off       | Off       |
| Sweep Points     | 501       | 4001      | 8001      | 8001      |
| Stop After Sweep | Off       | Off       | Off       | Off       |
| Transd. Factor   | None      | None      | None      | None      |
| Limit Check 1    | Absolute  | Absolute  | Absolute  | Absolute  |


### Spurious emissions measurements

Spurious emissions measurements very often require different measurement bandwidths for different frequency ranges. They can easily be performed by using the spurious emissions functions in the sweep list table, which allows to set parameters such as RBW, VBW, detector, level, number of sweep points individually for different frequency ranges. This makes a complete spurious emissions measurement very fast and easy as setup and measurement is made only once and not separately for each frequency range. A segmented sweep can also easily be set up using this function.

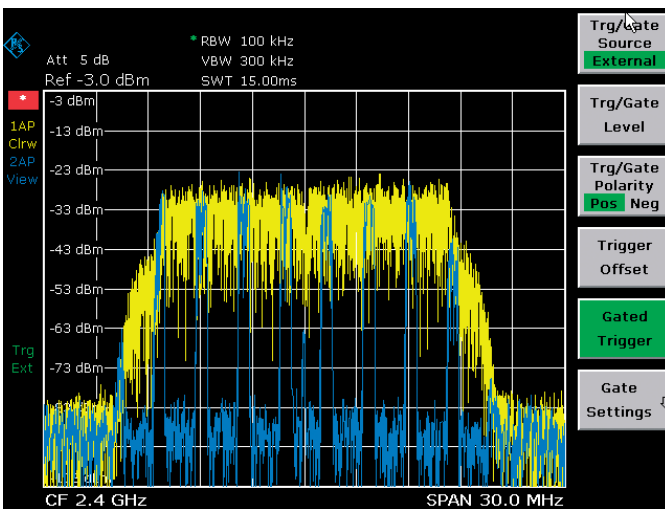


### Gated sweep

The R&S®FSL uses the gated sweep function (R&S®FSL-B8 option) for burst signal measurements. This function can display the modulation spectrum of a GSM signal or a burst WLAN signal (as shown in the example).

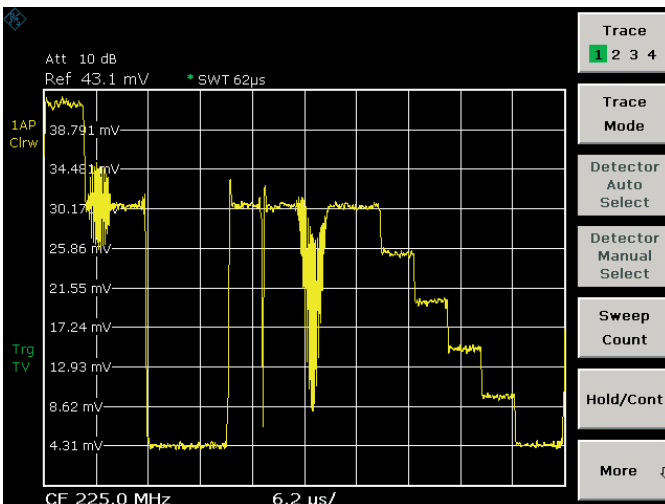


### TV trigger option

The R&S®FSL-B6 TV trigger generates a trigger in response to selectable lines and the horizontal or vertical blanking interval. Video formats with 525 or 625 lines with positive or negative modulation are covered.

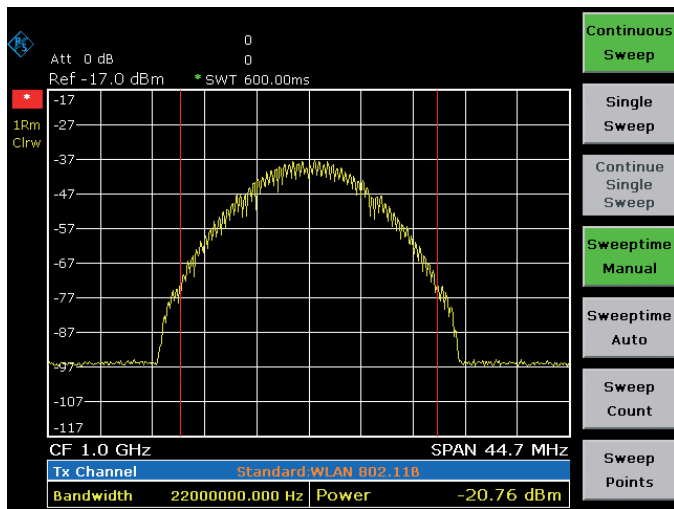


## Channel power measurements

Channel power measurements use integration to determine the power within a defined channel bandwidth. The full-featured RMS detector is used to measure the correct power independent of the signal, which ensures good repeatability and accuracy. The channel width can be defined by the user or selected from an extensive list of transmission standards.

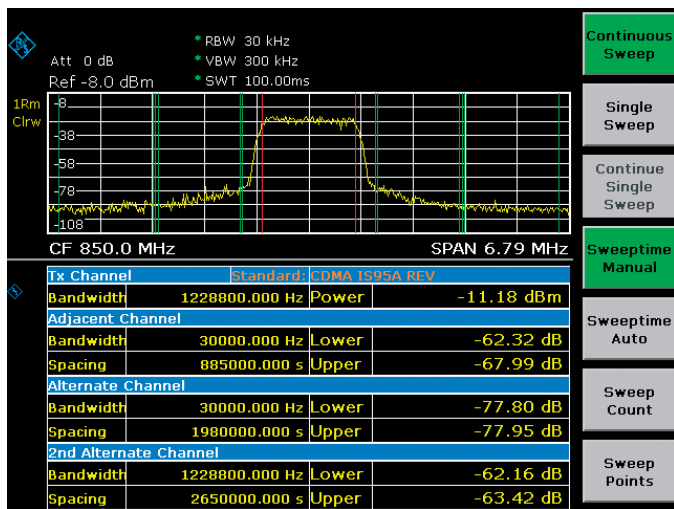


## Adjacent channel power (ACP, MC-ACP) measurements, for example cdmaOne

The ACP measurement function determines the adjacent channel power as an absolute value or relative to the useful carrier. The R&S®FSL offers predefined settings for many transmission standards, but parameters can also be user-defined, with channel widths and spacings for up to 12 channels and up to 12 adjacent channels.

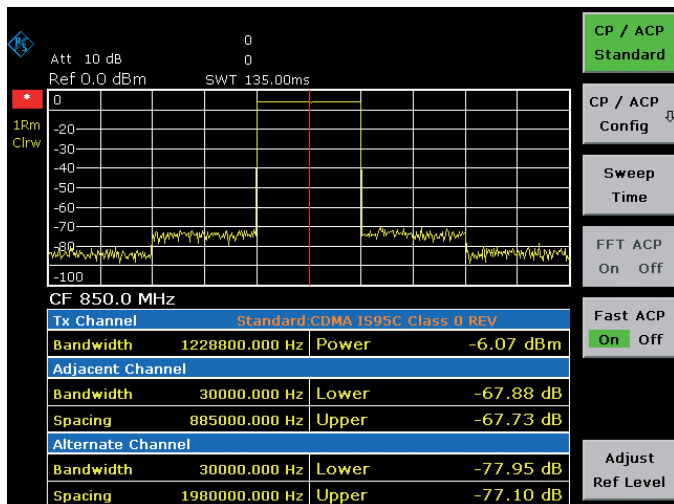


## Fast ACP in time domain with standard-compliant channel filters

The fast ACP function measures the adjacent channel power in the time domain using standard-compliant channel filters. This reduces the measurement time necessary for a specific repeatability by a factor of 10. It also provides an easy way to determine transient, time-dependent adjacent channel power.

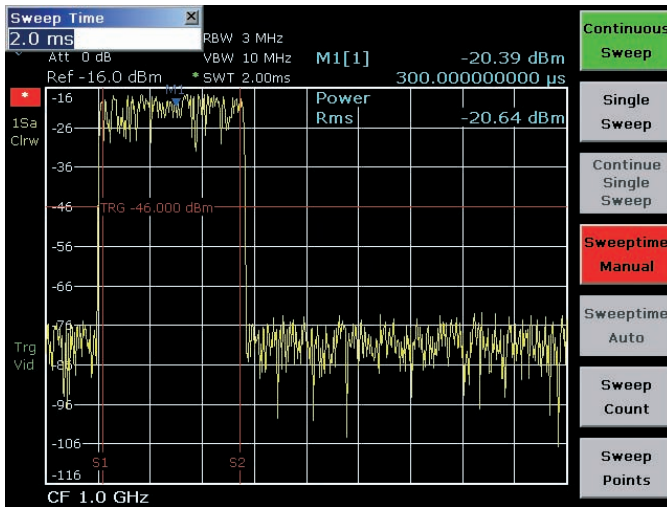


### Burst power measurement: time domain power

This feature allows the burst power to be measured in the time domain. Display lines delimit the evaluation area, thus making it possible to determine the power during the 147 useful bits of a GSM burst, for example.

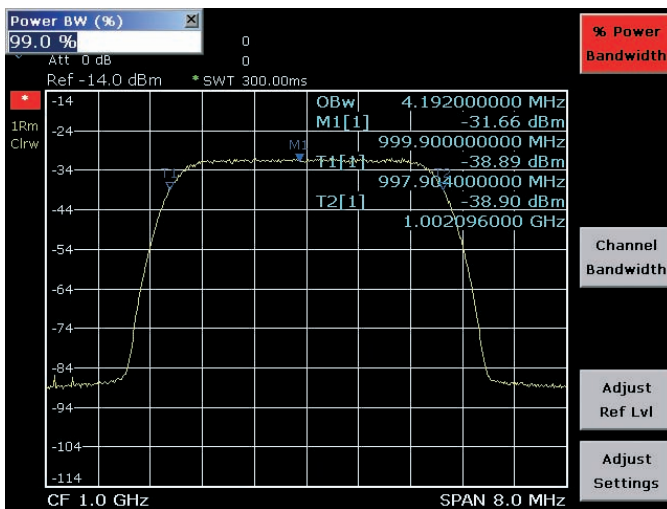

### Occupied bandwidth (OBW)

OBW is a measure of the bandwidth occupied by the signal. The R&S®FSL determines the bandwidth containing, for example, 99% of the signal power from the total power within the span. The points from the right and left edge of the trace are summed up until 1% of the power is reached. The remaining power then corresponds to 99% of the power and the distance between the two frequency markers is the occupied bandwidth, which is displayed in the marker field. The fully synchronous frequency sweep and the high number of trace points make this measurement very precise.

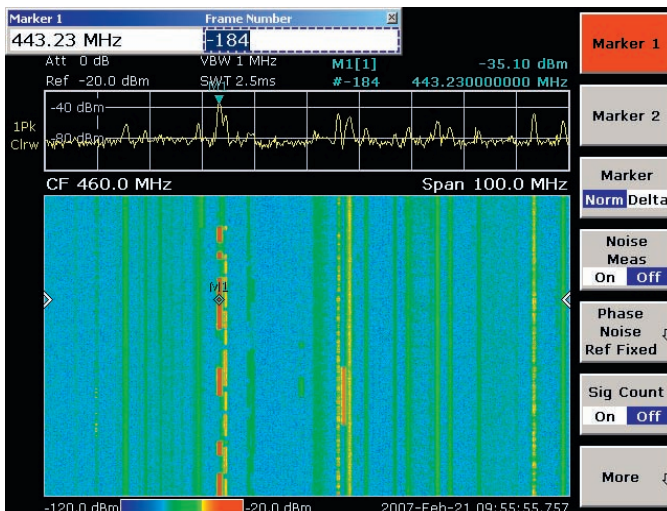

### Spectrogram measurements

The R&S®FSL-K14 option adds a spectrogram display and trace recording to the R&S®FSL. The spectrogram view shows a history of the spectrum and helps to analyze intermittent problems or variations in frequency and level versus time. It also adds a new trigger, i.e. a time trigger that makes it possible to record a trace at a regular time interval.

- Recording of up to 20 000 traces: approx. 5.5 h continuous monitoring with repetition interval set at 1 s
- Time trigger, repetition interval 100 ms to 5000 s: allows unattended continuous monitoring
- Scrolling through recorded traces with markers: replay and repeatedly analyze the recorded data

# R&S® FSL-K7 option

## AM/FM/φM

### measurement demodulator


The R&S® FSL-K7 AM/FM/φM measurement demodulator converts the R&S® FSL into an analog modulation analyzer for amplitude-, frequency- or phase-modulated signals.

It measures not only characteristics of the useful modulation, but also factors such as residual FM or synchronous modulation.


#### Display and evaluation capabilities

- ▮ Modulation signal versus time
- ▮ Spectrum of modulation signal (FFT)
- ▮ RF signal power versus time
- ▮ Spectrum of RF signal (FFT versus max. 18 MHz)
- ▮ Table with numeric display of
  - Deviation or modulation depth,
    - +Peak, -Peak, ± Peak/2 and RMS weighted
  - Modulation frequency
  - Carrier frequency offset
  - Carrier power
  - Total harmonic distortion (THD) and SINAD

| Condensed data  |   |
|---|---|
| Demodulation bandwidth                                  | 100 Hz to 18 MHz  |
| Recording time (depends on demodulation bandwidth)      | 12.5 ms to 3276 s   |
| AF filters  |   |
| Highpass filter   | 50 Hz, 300 Hz   |
| Lowpass filter  | 3 kHz, 15 kHz, 150 kHz and 5%, 10% or 25% of demodulation bandwidth |
| Deemphasis  | 25/50/75/750 μs   |
| Modulation frequency                                    | <5 MHz, max. 0.5 × demodulation bandwidth                           |
| Measurement uncertainty (deviation or modulation depth) | 3%  |

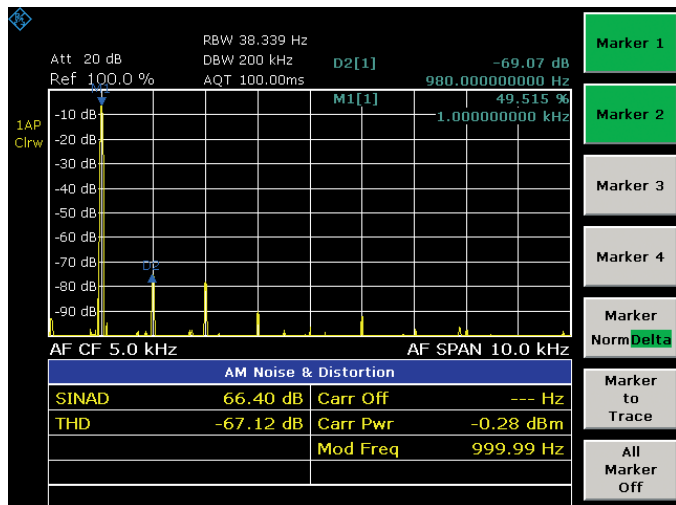

THD measurement on an amplitude-modulated signal: The first harmonic of the modulation signal is well suppressed by 69 dB. This corresponds to a THD (D2) of less than 0.1%.

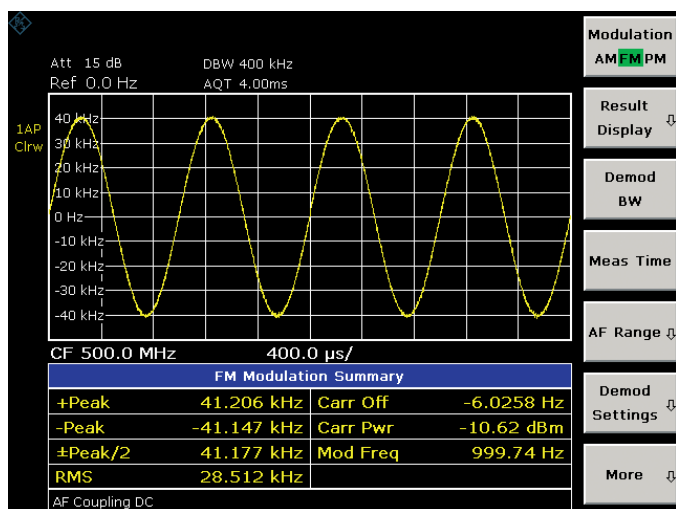

Frequency deviation measurement: display of modulation signal together with peak and RMS deviation, carrier frequency offset and carrier power.




# R&S® FSL-K8 option

## Transmitter measurements for Bluetooth® V2.0 and EDR

The R&S® FSL-K8 application firmware enhances the range of applications of the R&S® FSL spectrum analyzer to include measurements on Bluetooth® transmitters.



**Relative transmit power:** The EDR relative transmit power determines the power of the GFSK-modulated and the DPSK-modulated part and the power difference.

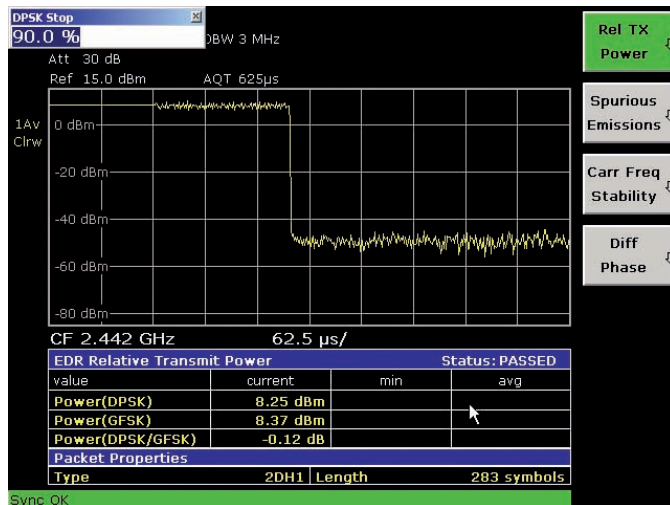

All measurements are carried out in line with the Bluetooth® RF Test Specification (Bluetooth® SIG) Rev. 2.0+EDR and cover basic rate as well as EDR. Integrated limit value monitoring is provided for all measurements and allows analysis of the results in the development and production of Bluetooth® modules.

| Bluetooth® measurements                                    |  |
|--|--|
| <b>Basic rate measurements</b>                             |  |
| Output power   |  |
| ACP over up to 79 channels                                 |  |
| Modulation characteristics                                 |  |
| Initial carrier frequency tolerance                        |  |
| Carrier frequency drift                                    |  |
| <b>EDR measurements</b>                                    |  |
| Output power and relative transmit power                   |  |
| Inband spurious emissions, gated                           |  |
| Carrier frequency stability and modulation accuracy (DEVm) |  |
| Differential phase encoding                                |  |

**Adjacent channel power (ACP):** This measurement determines the power of all adjacent channels. The power of up to 79 channels in total can be measured. For EDR inband spurious, the measurement can be gated.

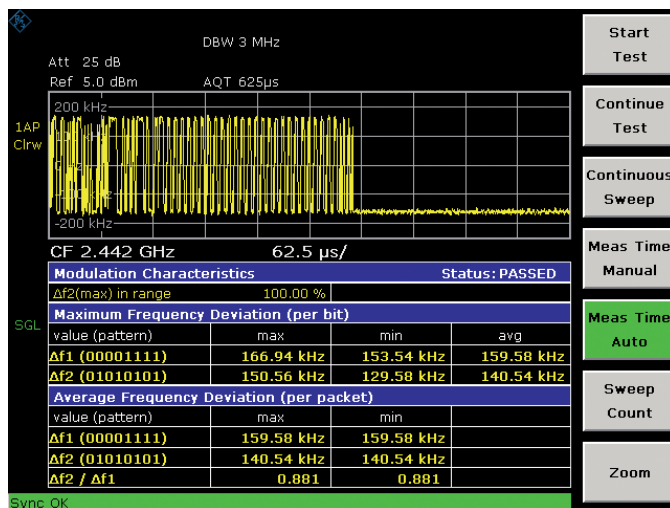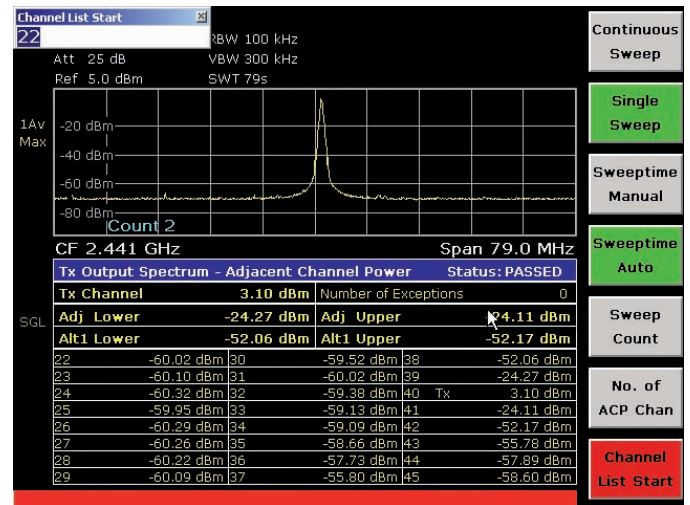

**Modulation characteristics:** This measurement determines the maximum frequency deviation of all 8-bit test sequences of the payload. In addition, the average value of the maximum frequency deviations per packet is calculated and displayed.


# R&S®FSL-K20 option

## Analog and digital cable TV measurements

The R&S®FSL-K20 CATV option provides easy-to-use push-button measurements for analog and digital cable TV networks as well as for analog TV transmitters.

| TV standards                          |  |
|---------------------------------------|--|
| <b>Selectable analog TV standards</b> | <b>Selectable digital cable TV standards</b> |
| B/G, D/K, I, K1, L, M, N              | QAM J.83/A (EU), J.83/B (US), J.83/C (Japan) |
| PAL, NTSC, SECAM                      | 4QAM to 1024QAM                              |
|                                       | Symbol rate: 0.1 Msymbol/s to 7.15 Msymbol/s |

| Measurements  |  |
|---|--|
| Analog TV   | Digital TV   |
| Carrier levels (picture and sound carriers)   | Channel power  |
| C/N (in-service, off-service, quiet line)   | Modulation parameters and errors: carrier frequency offset, symbol frequency offset, MER, EVM, phase jitter, carrier suppression, quadrature offset, imbalance |
| CTB (composite triple beat) and CSO (composite second order), off-service or during quiet line                  | Constellation diagram  |
| Vision modulation   | Echo pattern   |
| Hum   | Signal statistics/CCDF, APD  |
| Video scope function for detailed line analysis   |  |
| Tilt: determines the frequency response of the cable TV network by measuring the channel power of every channel |  |

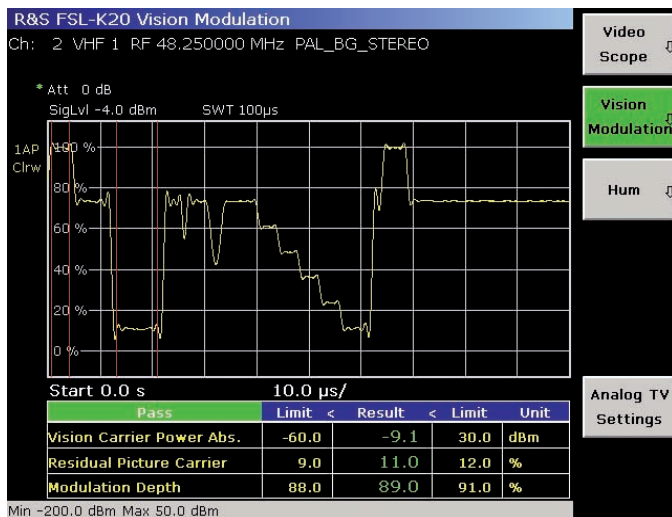

### Channel tables

Channel tables make it possible to preconfigure the R&S®FSL for a specific network:

- Channel numbers can be assigned to frequencies
- The signal type for each channel can be defined (analog TV signal, digital TV signal) as well as even more detailed properties such as the position of test lines

The R&S®FSL is set up correctly just by entering the channel number. Channel tables can be easily copied and multiplied between different instruments.

### Video scope function (video line analysis) and vision modulation

A dedicated video line trigger allows selected lines of the video signals to be displayed for detailed analysis. The vision modulation measurement further determines the modulation depth and residual picture carrier level.

### Digital TV signals

A table provides a quick overview of the most important modulation quality parameters such as MER, EVM (both peak and RMS), carrier frequency offset and symbol frequency offset.

Typical I/Q modulator impairments such as quadrature offset or gain imbalance can be evaluated from the modulation error table (see picture). A constellation diagram enables further analysis of faults and their cause.



# R&S®FSL-K30 option

## Noise figure and gain measurements

The R&S®FSL-K30 application firmware provides the R&S®FSL spectrum analyzer with features otherwise only provided by special noise measurement analyzers.

The following parameters can be measured at a specified frequency or in a selectable frequency range:

- ▮ Noise figure in dB
- ▮ Noise temperature in K
- ▮ Gain in dB

Compared with conventional noise measurement systems, R&S®FSL-K30 has the advantage that a wide variety of further RF measurements can also be performed. The R&S®FSL also allows the measurement of harmonics, intermodulation, spurious responses and many other RF-relevant criteria (for measurements on amplifiers and on frequency-converting DUTs, e.g. low-noise converters).

### Noise measurements

- ▮ Measurement range 0 dB to 35 dB
- ▮ Resolution 0.01 dB
- ▮ Measurement accuracy  $\pm 0.3$  dB (measurement with external preamplifier (gain 30 dB, noise figure <5 dB) and 1 MHz resolution bandwidth, valid for DUTs with noise figure 1 dB to 10 dB and gain >10 dB)


### Gain measurements

- ▮ Measurement range 0 dB to 60 dB
- ▮ Resolution 0.01 dB
- ▮ Measurement accuracy  $\pm 0.2$  dB (measurement with preamplifier (gain 30 dB, noise figure <5 dB) and 1 MHz resolution bandwidth)

### Required hardware

- ▮ R&S®FSL-B5 noise source power supply (via 28 V connector on the R&S®FSL rear panel)
- ▮ Noise source, e.g. NoiseCom NC346
- ▮ External preamplifier (for improved accuracy and repeatability of measurements)


Test setup (schematics).

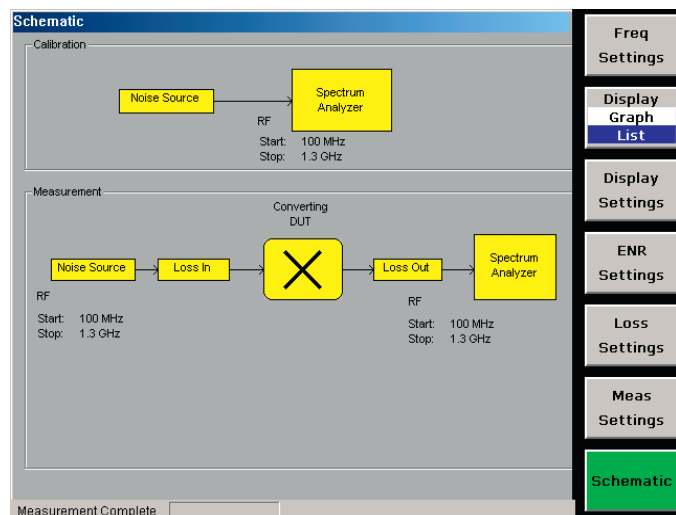

Tabular representation of measurement results.

| R&S FSL-K30 Noise & Gain |          |                 |           |
|--------------------------|----------|-----------------|-----------|
| RBW:                     | 1 MHz    | RF Attenuation: | 0 dB      |
| Average:                 | 1        | Auto Ref Level: | On        |
| Direct                   |          | Current Value   |           |
| RF:                      | 100 MHz  | ENR:            | 15 dB     |
| LO:                      | ...      | Loss In:        | 0 dB      |
| IF:                      | ...      | Loss Out:       | 0 dB      |
|                          |          | NF:             | 2.62 dB   |
|                          |          | Noise Temp:     | 240.47 K  |
|                          |          | Gain:           | 21.65 dB  |
| Frequency List Results   |          |                 |           |
| RF                       | NF       | Noise Temp      | Gain      |
| 100.000 MHz              | 2.623 dB | 240.469 K       | 21.646 dB |
| 150.000 MHz              | 2.652 dB | 244.085 K       | 21.642 dB |
| 200.000 MHz              | 2.696 dB | 249.456 K       | 21.610 dB |
| 250.000 MHz              | 2.721 dB | 252.580 K       | 21.605 dB |
| 300.000 MHz              | 2.784 dB | 260.527 K       | 21.644 dB |
| 350.000 MHz              | 2.746 dB | 255.814 K       | 21.668 dB |
| 400.000 MHz              | 2.775 dB | 259.409 K       | 21.709 dB |
| 450.000 MHz              | 2.737 dB | 254.684 K       | 21.759 dB |
| 500.000 MHz              | 2.760 dB | 257.493 K       | 21.739 dB |
| 550.000 MHz              | 2.730 dB | 253.748 K       | 21.720 dB |
| 600.000 MHz              | 2.751 dB | 256.370 K       | 21.685 dB |
| 650.000 MHz              | 2.723 dB | 252.875 K       | 21.609 dB |
| 700.000 MHz              | 2.749 dB | 256.165 K       | 21.511 dB |
| 770.000 MHz              | 2.781 dB | 260.226 K       | 21.251 dB |
| 800.000 MHz              | 2.773 dB | 259.102 K       | 21.140 dB |

Measurements on an amplifier.

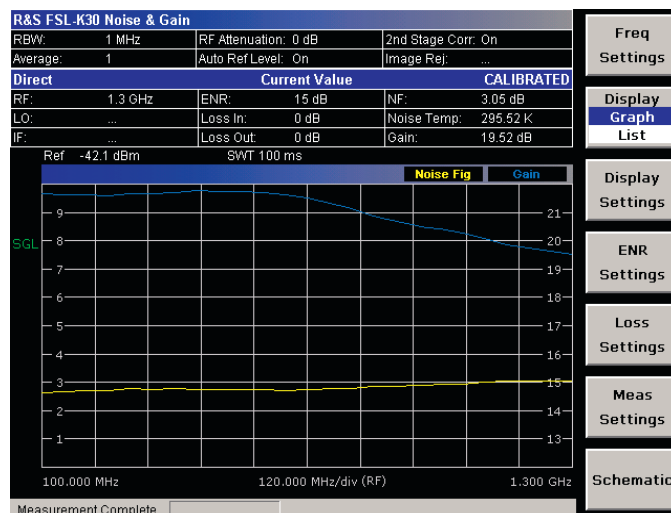


# R&S® FSL-K82/-K84

## options

### CDMA2000®/ 1xEV-DO transmitter

## measurements

The R&S®FSL-K82 application firmware enhances the application range of the R&S®FSL spectrum analyzer to include code domain power and modulation measurements on CDMA2000® signals for radio configurations 1 to 5 and 10. The R&S®FSL-K84 application firmware adds capability for the analysis of 1xEV-DO signals.

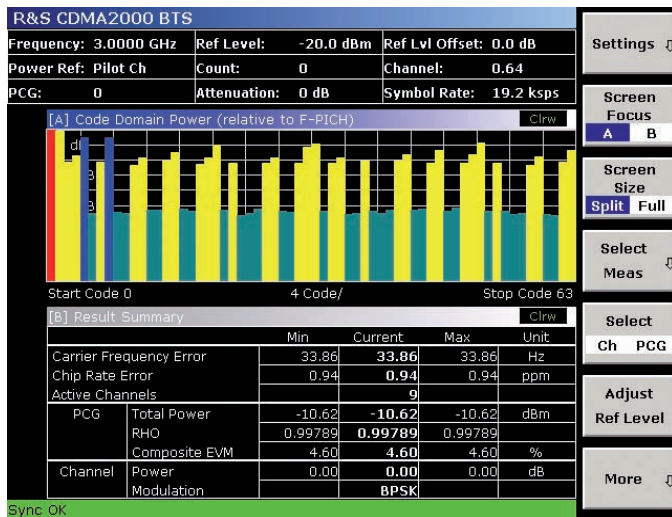

The R&S® FSL is the ideal tool for CDMA2000® base station transmitter measurements in service and production. The main application is the determination of the power in the individual code channels referred to as code domain power measurement. The power ratios between the individual channels, for example, can be checked for compliance with the nominal values. Moreover, this measurement is a very efficient tool for detecting transmitter impairments such as clipping or intermodulation that are not obvious from the spectrum alone.


Equipped with the R&S®FSL-K82/-K84, the R&S®FSL provides the functionality needed for base station testing as well as the related parameters:

- ▮ Code domain power (code domain analyzer)
- ▮ Code domain power versus time (R&S®FSL-K82)
- ▮ Power versus chip (R&S®FSL-K84)
- ▮ Rho
- ▮ Error vector magnitude (EVM)
- ▮ Peak code domain error
- ▮ Power versus symbol
- ▮ Symbol constellation
- ▮ Channel table
- ▮ Code domain error power

For 1xEV-DO, the rho measurement is subdivided into several new measurements due to the time division structure:

- ▮ Rho<sub>MAC</sub>
- ▮ Rho<sub>data</sub>
- ▮ Rho<sub>pilot</sub>
- ▮ Rho<sub>overall-1</sub>
- ▮ Rho<sub>overall-2</sub>

The code domain power measurement displays the active and inactive channels in bit-reversed order. The result summary provides a quick overview of the main parameters of the signal at a glance, e.g. total power, channel power, rho and EVM.

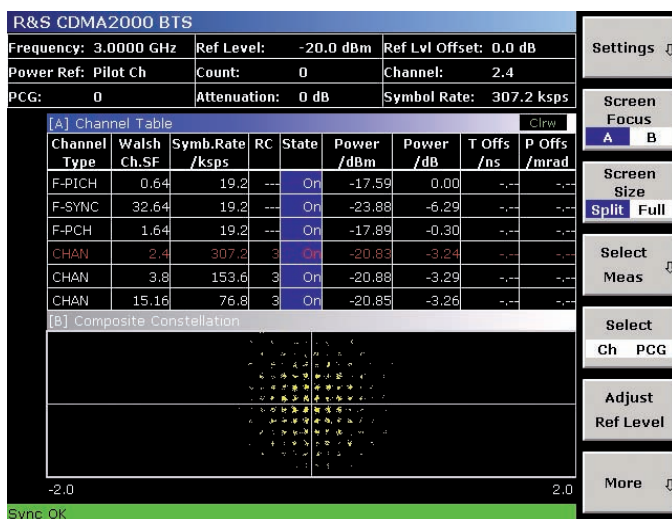

The upper part of the screen shows an overview of the detected channels and a number of parameters such as power and timing offset. The lower part shows the composite constellation diagram of the signal.

# R&S® FSL-K91/-K91n options

## WLAN transmitter measurements

The R&S®FSL-K91 WLAN application firmware expands the application range of the R&S®FSL spectrum analyzer by spectrum and modulation measurements on signals in line with the WLAN IEEE 802.11a/b/g/j standards. The R&S®FSL-K91n application firmware adds capability to analyze 20 MHz signals in line with IEEE 802.11n.

The excellent price/performance ratio, the compact size and the capability to be remote-controlled make the R&S®FSL an ideal WLAN tester in production. The R&S®FSL's analysis and evaluation capabilities, which enable measurements beyond the scope of the standard, make it indispensable for applications in development and troubleshooting. Functions, operation and remote control commands are essentially identical to those of the R&S®FSQ signal and spectrum analyzer with the R&S®FSQ-K91/-K91n option.


### Measurement

- ▮ Output power
- ▮ Spectrum mask with limit lines and pass/fail indication
- ▮ Adjacent channel power
- ▮ Burst rise and fall times
- ▮ EVM
- ▮ EVM versus carrier or time
- ▮ Constellation diagram (for specific or all carriers)
- ▮ Constellation overview
- ▮ Selectable tracking: phase, level, timing
- ▮ RF carrier leakage
- ▮ Carrier frequency and symbol clock error
- ▮ CCDF and crest factor
- ▮ Bit stream
- ▮ Header information
- ▮ Automatic modulation selection

| R&S FSL-K91 Wireless LAN |         | IEEE 802.11g |                |               |                |        |      |
|--------------------------|---------|--------------|----------------|---------------|----------------|--------|------|
| Frequency:               | 2.4 GHz | Ref Level:   | -0.9 dBm       | External Att: | 0 dB           |        |      |
| Preamble Type:           | OFDM    | Modulation:  | 54 Mbps 64 QAM | PSDU Len:     | 1/1366         |        |      |
| <b>* Result Summary</b>  |         |              |                |               |                |        |      |
| Bursts:                  | 3       | Min          | Mean           | Limit         | Max            | Limit  | Unit |
| EVM All Carr.            |         | 0.89         | 0.92           | 5.62          | 0.94           | 5.62   | %    |
|                          |         | -41.03       | -40.77         | -25.00        | -40.56         | -25.00 | dB   |
| EVM Data Carr.           |         | 0.89         | 0.92           | 5.62          | 0.94           | 5.62   | %    |
|                          |         | -40.97       | -40.71         | -25.00        | -40.52         | -25.00 | dB   |
| EVM Pilot Carr.          |         | 0.81         | 0.84           | 39.81         | 0.88           | 39.81  | %    |
|                          |         | -41.79       | -41.50         | -8.00         | -41.09         | -8.00  | dB   |
| IQ Offset                |         | -60.62       | -60.05         | -15.00        | -69.11         | -15.00 | dB   |
| Gain Imbalance           |         | -0.07        | -0.02          |               | 0.03           |        | %    |
|                          |         | -0.01        | -0.00          |               | 0.00           |        | dB   |
| Quadrature Err           |         | -0.06        | -0.03          |               | -0.00          |        | °    |
| Freq. Err                |         | 278.39       | 288.09 ± 60000 |               | 294.76 ± 60000 |        | Hz   |
| Symb Clock Err           |         | -0.02        | 0.03 ± 25      |               | 0.14 ± 25      |        | ppm  |
| Burst Power              |         | -11.46       | -11.46         |               | -11.46         |        | dBm  |
| Crest Factor             |         | 10.24        | 10.24          |               | 10.25          |        | dB   |

The result summary provides a quick overview of the most important measurement values.

OFDM allows the constellation diagram to be displayed for all or for selected carriers.

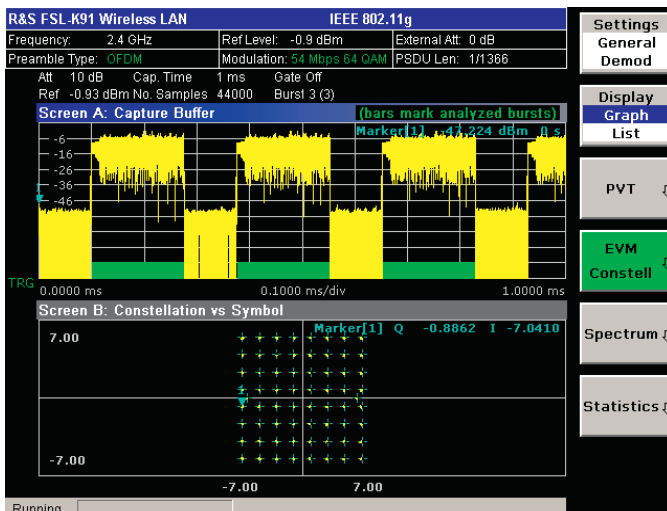

Setup tables provide a quick overview of the selected settings and quick access to the setting parameters.

| General Settings                    |  |
|-------------------------------------|--|
| <b>Signal Characteristics</b>       | <b>Advanced Settings</b>                     |
| Standard: IEEE 802.11a              | Auto Level Time: 100 ms                      |
| Frequency: IEEE 802.11a             | Ref. Level: -20 dBm                          |
| Channel No: IEEE 802.11b            | Attenuation: 0 dB                            |
| Level Settings                      | Sample Rate: 20 MHz                          |
| Signal Level: IEEE 802.11j (20 MHz) |  |
| Ext Att: IEEE 802.11g               |  |
| Data Capture Settings               | <b>Demod Settings</b>                        |
| Capture Time: 1 ms                  | <b>Burst To Analyze</b>                      |
| Burst Count: 1                      | Signal Field Content                         |
| Analyze Bursts: 1                   | Burst Type: Direct Link Burst                |
| Sweep Count: 1                      | Auto Demodulation: <input type="checkbox"/>  |
| Trigger Settings                    | Demodulator: 54 Mbps 64 QAM                  |
| Trigger Mode: Free Run              | Equal Burst Length: <input type="checkbox"/> |
| Trigger Offset: -10 µs              | Min Data Symbols: 1                          |
| Power Level: Auto Lvl 0 dBm         | Max Data Symbols: 1366                       |
| IQ Settings                         | Channel Estimation: Preamble                 |
| Swap IQ: <input type="checkbox"/>   | <b>Tracking</b>                              |
|                                     | Phase: <input checked="" type="checkbox"/>   |
|                                     | Timing: <input type="checkbox"/>             |
|                                     | Level: <input type="checkbox"/>              |

# Benefit from the advantages of networking

## Versatile documentation and networking capabilities

The Windows® XP Embedded operating system coupled with a wide variety of interfaces makes it easy to insert measurement results into documentation. Simply save the screen contents as a BMP or WMF file and import the file into your word processing system. To process trace data, save it as an ASCII file (CSV format), together with the main instrument settings.


## Make use of the advantages offered by networking

The standard LAN interface opens up versatile networking capabilities:

- Link to standard network (Ethernet 10/100BaseT)
- Running under Windows® XP Embedded, the R&S®FSL can be configured for network operation. Applications such as data output to a central network printer or saving results on a central server can easily be implemented. The R&S®FSL can thus be optimally matched to any work environment
- You can import screen contents directly into Word for Windows® or, by using an Excel macro, into your documentation programs and thus immediately create data sheets for your products or documents for quality assurance
- The R&S®FSL is LXI class C compliant. LXI is the LAN-based successor to the IEC/IEEE bus, combining the advantages of Ethernet with the simplicity and familiarity of the IEC/IEEE bus. LXI instruments use the VXI11 protocol for remote control, which is supported by all VISA implementations. The common LAN configuration of LXI instruments makes integration into a network easy

The standard USB host interface allows functions such as the following:

- Quick firmware update from a USB flash memory stick or a USB CD-ROM drive
- Connection of PC peripheral devices (mouse, keyboard)
- Simple file transfer, including large volumes of data via a USB flash memory stick

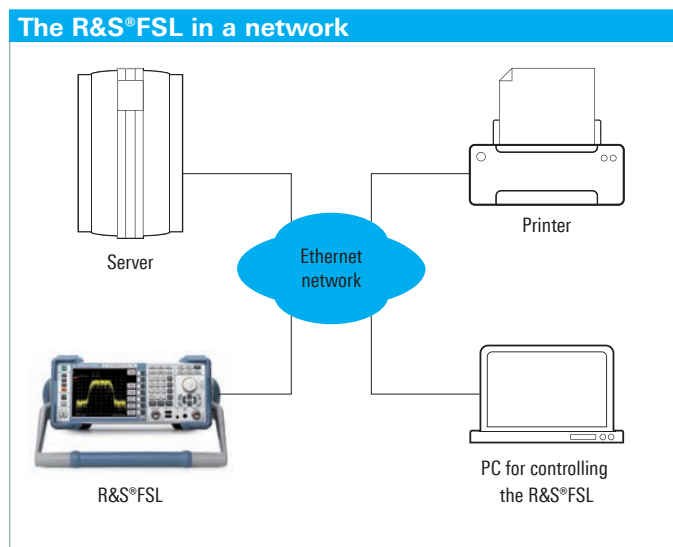

# Specifications in brief

|  | R&S®FSL3,<br>model .03  | R&S®FSL3,<br>model .13 | R&S®FSL6,<br>model .06 | R&S®FSL6,<br>model .16 | R&S®FSL18<br>model .18             | R&S®FSL18<br>model .28      |
|--|---|------------------------|------------------------|------------------------|------------------------------------|-----------------------------|
| Frequency range  | 9 kHz to 3 GHz  | 9 kHz to 3 GHz         | 9 kHz to 6 GHz         | 9 kHz to 6 GHz         | 9 kHz to 18 GHz (overrange 20 GHz) |                             |
| Frequency accuracy   | 1 × 10 <sup>-6</sup>  |                        |                        |                        |                                    |                             |
| With R&S®FSL-B4, OCXO  | 1 × 10 <sup>-7</sup>  |                        |                        |                        |                                    | standard with the R&S®FSL18 |
| <b>Resolution bandwidths</b>   |   |                        |                        |                        |                                    |                             |
| Standard   | 300 Hz to 10 MHz in 1/3 sequence, zero span additionally 20 MHz                         |                        |                        |                        |                                    |                             |
| With R&S®FSL-B7  | 10 Hz to 10 MHz in 1/3 sequence, additionally 1 Hz (FFT filter)                         |                        |                        |                        |                                    |                             |
| Video bandwidths   | 10 Hz to 10 MHz   |                        |                        |                        |                                    |                             |
| Signal analysis bandwidth  | 28 MHz  |                        |                        |                        |                                    |                             |
| Phase noise  | typ. -103 dBc (1 Hz) at 10 kHz from carrier, 1 GHz                                      |                        |                        |                        |                                    |                             |
| <b>Displayed average noise level (DANL)</b>                          |   |                        |                        |                        |                                    |                             |
| With 300 Hz RBW  | typ. -117 dBm   |                        |                        |                        |                                    |                             |
| With 1 Hz FFT RBW and preamplifier (R&S®FSL-B7, R&S®FSL-B22 options) | 500 MHz: typ. -162 dBm<br>3 GHz: typ. -158 dBm  |                        |                        |                        |                                    |                             |
| Third order intercept (TOI)  | typ. +18 dBm  |                        |                        |                        |                                    |                             |
| Detectors  | pos/neg peak, auto peak, RMS, quasi-peak, average, sample                               |                        |                        |                        |                                    |                             |
| Level measurement uncertainty  | <0.5 dB (30 kHz ≤ f ≤ 3 GHz), <0.8 dB (3 GHz < f ≤ 6 GHz), <1.2 dB (6 GHz < f ≤ 18 GHz) |                        |                        |                        |                                    |                             |
| Tracking generator   | no  | yes                    | no                     | yes                    | no                                 | yes                         |
| Frequency range  | -   | 1 MHz to 3 GHz         | -                      | 1 MHz to 6 GHz         | -                                  | 10 MHz to 18 GHz            |
| Output level   | -   | -20 dBm to 0 dBm       | -                      | -20 dBm to 0 dBm       | -                                  | -30 dBm to -10 dBm          |

# Ordering information

| Designation   | Type      | Order No.    |
|---|-----------|--------------|
| Spectrum Analyzer, 9 kHz to 3 GHz                           | R&S®FSL3  | 1300.2502.03 |
| Spectrum Analyzer, 9 kHz to 3 GHz, with tracking generator  | R&S®FSL3  | 1300.2502.13 |
| Spectrum Analyzer, 9 kHz to 6 GHz                           | R&S®FSL6  | 1300.2502.06 |
| Spectrum Analyzer, 9 kHz to 6 GHz, with tracking generator  | R&S®FSL6  | 1300.2502.16 |
| Spectrum Analyzer, 9 kHz to 18 GHz (overrange 20 GHz)       | R&S®FSL18 | 1300.2502.18 |
| Spectrum Analyzer, 9 kHz to 18 GHz, with tracking generator | R&S®FSL18 | 1300.2502.28 |

## Options

| Designation   | Type         | Order No.    | Comments   |
|---|--------------|--------------|--|
| OCXO Reference Frequency, aging $1 \times 10^{-7}$ /year    | R&S®FSL-B4   | 1300.6008.02 | standard with the R&S®FSL18  |
| Additional Interfaces                                       | R&S®FSL-B5   | 1300.6108.02 | video out, IF out, noise source control, AUX port, connector for R&S®NRP-Zxx power sensors |
| TV Trigger  | R&S®FSL-B6   | 1300.5901.02 |  |
| Narrow Resolution Filters                                   | R&S®FSL-B7   | 1300.5601.02 |  |
| Gated Sweep   | R&S®FSL-B8   | 1300.5701.02 |  |
| GPIB Interface  | R&S®FSL-B10  | 1300.6208.02 |  |
| RF Pre-amplifier (3/6 GHz)                                  | R&S®FSL-B22  | 1300.5953.02 |  |
| DC Power Supply, 12 V to 28 V                               | R&S®FSL-B30  | 1300.6308.02 |  |
| NiMH Battery Pack   | R&S®FSL-B31  | 1300.6408.02 | requires R&S®FSL-B30   |
| <b>Firmware/options</b>                                     |              |              |  |
| AM/FM/ϕM Measurement Demodulator                            | R&S®FSL-K7   | 1300.9246.02 |  |
| Transmitter Measurements for Bluetooth® V2.0 and EDR        | R&S®FSL-K8   | 1301.9398.02 |  |
| Power Sensor Support  | R&S®FSL-K9   | 1301.9530.02 | requires R&S®FSL-B5 or R&S®NRP-Z3/4 and R&S®NRP-Zxx power sensor                           |
| Spectrogram Measurements                                    | R&S®FSL-K14  | 1302.0913.02 |  |
| Cable TV Measurements                                       | R&S®FSL-K20  | 1301.9675.02 |  |
| Application Firmware for Noise Figure and Gain Measurements | R&S®FSL-K30  | 1301.9817.02 | requires R&S®FSL-B5 and preamplifier   |
| 3GPP FDD BTS Application Firmware                           | R&S®FSL-K72  | 1302.0620.02 | see separate brochure  |
| CDMA2000® Base Station Analysis                             | R&S®FSL-K82  | 1302.7803.02 |  |
| 1xEV-DO Base Station Analysis                               | R&S®FSL-K84  | 1302.0159.02 |  |
| WLAN Transmitter Measurements for IEEE 802.11a, b, g, j     | R&S®FSL-K91  | 1302.0094.02 |  |
| Upgrade of R&S®FSL-K91 to IEEE 802.11n                      | R&S®FSL-K91n | 1308.7903.02 |  |
| WiMAX™ IEEE 802.16 OFDM Application Firmware                | R&S®FSL-K92  | 1302.0236.02 | see separate brochure  |
| WiMAX™ IEEE 802.16 OFDM/OFDMA Application Firmware          | R&S®FSL-K93  | 1302.0736.02 | see separate brochure  |
| Upgrade from R&S®FSL-K92 to R&S®FSL-K93                     | R&S®FSL-K92U | 1302.0307.02 | see separate brochure  |

The Bluetooth® word mark and logos are owned by the Bluetooth SIG, Inc. and any use of such marks by Rohde&Schwarz is under license.

CDMA2000® is a registered trademark of the Telecommunications Industry Association (TIA-USA).

“WiMAX Forum” is a registered trademark of the WiMAX Forum. “WiMAX,” the WiMAX Forum logo, “WiMAX Forum Certified,” and the WiMAX Forum Certified logo are trademarks of the WiMAX Forum.



## Recommended extras

| Designation  | Type         | Order No.    |
|--|--------------|--------------|
| 19" Rackmount Adapter  | R&S®ZZA-S334 | 1109.4487.00 |
| Soft Carrying Bag  | R&S®FSL-Z3   | 1300.5401.00 |
| Protective Hard Cover  | R&S®EVS-Z6   | 5201.7760.00 |
| Additional Charger Unit  | R&S®FSL-Z4   | 1300.5430.02 |
| Matching Pad 75 Ω, L section   | R&S®RAM      | 0358.5414.02 |
| Matching Pad 75 Ω, series resistor 25 Ω  | R&S®RAZ      | 0358.5714.02 |
| Matching Pad 75 Ω, L section, N to BNC   | R&S®FSH-Z38  | 1300.7740.02 |
| SWR Bridge, 5 MHz to 3 GHz   | R&S®ZRB2     | 0373.9017.52 |
| SWR Bridge, 40 kHz to 4 GHz  | R&S®ZRC      | 1039.9492.52 |
| SWR Bridge, 10 MHz to 3 GHz<br>(incl. Open, Short, Load calibration standards) | R&S®FSH-Z2   | 1145.5767.02 |

## Power sensors supported by R&S®FSL-K9

| Designation                                    | Type        | Order No.    |
|--|-------------|--------------|
| Average Power Sensor, 10 MHz to 8 GHz, 200 mW  | R&S®NRP-Z11 | 1138.3004.02 |
| Average Power Sensor, 10 MHz to 18 GHz, 200 mW | R&S®NRP-Z21 | 1137.6000.02 |
| Average Power Sensor, 10 MHz to 18 GHz, 2 W    | R&S®NRP-Z22 | 1137.7506.02 |
| Average Power Sensor, 10 MHz to 18 GHz, 15 W   | R&S®NRP-Z23 | 1137.8002.02 |
| Average Power Sensor, 10 MHz to 18 GHz, 30 W   | R&S®NRP-Z24 | 1137.8502.02 |
| Average Power Sensor, 9 kHz to 6 GHz, 200 mW   | R&S®NRP-Z91 | 1168.8004.02 |
| Thermal Power Sensor, 0 Hz to 18 GHz, 100 mW   | R&S®NRP-Z51 | 1138.0005.02 |
| Thermal Power Sensor, 0 Hz to 40 GHz, 100 mW   | R&S®NRP-Z55 | 1138.2008.02 |

## Service you can rely on

- | In 70 countries
- | Person-to-person
- | Customized and flexible
- | Quality with a warranty
- | No hidden terms

## About Rohde & Schwarz

Rohde & Schwarz is an independent group of companies specializing in electronics. It is a leading supplier of solutions in the fields of test and measurement, broadcasting, radiomonitoring and radiolocation, as well as secure communications. Established 75 years ago, Rohde & Schwarz has a global presence and a dedicated service network in over 70 countries. Company headquarters are in Munich, Germany.

## Regional contact

Europe, Africa, Middle East

+49 1805 12 42 42\* or +49 89 4129 137 74

customersupport@rohde-schwarz.com

North America

1 888 TEST RSA (1 888 837 87 72)

customer.support@rsa.rohde-schwarz.com

Latin America

+1 410 910 79 88

customersupport.la@rohde-schwarz.com

Asia/Pacific

+65 65 13 04 88

customersupport.asia@rohde-schwarz.com

Certified Quality System  
**ISO 9001**  
DQS REG. NO 1954 QM

Certified Environmental System  
**ISO 14001**  
DQS REG. NO 1954 UM

For data sheet, see  
PD 0758.2790.22  
and [www.rohde-schwarz.com](http://www.rohde-schwarz.com)

## Rohde & Schwarz GmbH & Co. KG

Mühlendorfstraße 15 | 81671 München

Phone +498941 290 | Fax +498941 29 121 64

[www.rohde-schwarz.com](http://www.rohde-schwarz.com)

R&S® is a registered trademark of Rohde & Schwarz GmbH & Co. KG  
Trade names are trademarks of the owners | Printed in Germany (sk)  
PD 0758.2790.12 | Version 06.00 | December 2008 | R&S®FSL  
Data without tolerance limits is not binding | Subject to change

\*0.14 €/min within German wireline network; rates may vary in other networks (wireline and mobile) and countries.