



ABN 43 064 478 842

➤ 231 osborne avenue clayton south, vic 3169  
PO box 1548, clayton south, vic 3169  
t 03 9265 7400 f 03 9558 0875  
freecall 1800 680 680  
[www.tmgtestequipment.com.au](http://www.tmgtestequipment.com.au)

## Test & Measurement

- sales
- rentals
- calibration
- repair
- disposal

## Complimentary Reference Material

This PDF has been made available as a complimentary service for you to assist in evaluating this model for your testing requirements.

TMG offers a wide range of test equipment solutions, from renting short to long term, buying refurbished and purchasing new. Financing options, such as Financial Rental, and Leasing are also available on application.

TMG will assist if you are unsure whether this model will suit your requirements.

Call TMG if you need to organise repair and/or calibrate your unit.


If you click on the “Click-to-Call” logo below, you can call us for FREE!

TMG Corporate Website

TMG Products Website



Click-to-Call  
TMG Now

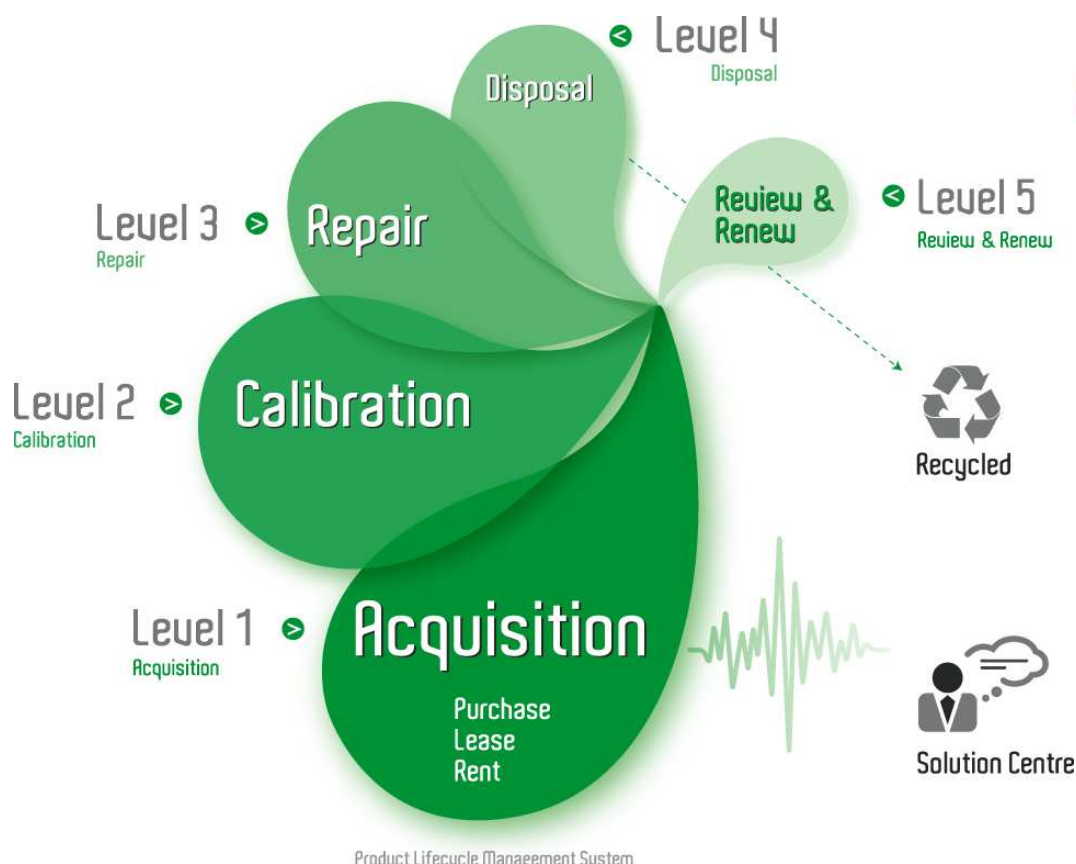


### Disclaimer:

All trademarks appearing within this PDF are trademarks of their respective owners.



# VHF/UHF Antennas

## ULTRALOG R&S® HL 562

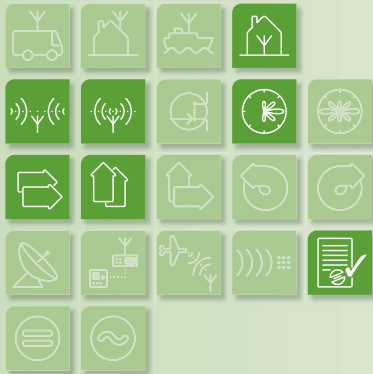

**30 MHz to 3000 MHz**

### Features


- ◆ Only one antenna required to cover an extremely wide frequency range
- ◆ Selectable polarization plane
- ◆ Gain increase at high frequencies
- ◆ Generation of high field strengths for EMS measurements
- ◆ Compact size
- ◆ Individual calibration to ANSI C63.5 and DIN 45003



### Brief description

The ULTRALOG R&S® HL562 combines the characteristics of a biconical and a log-periodic antenna. The ULTRALOG is mainly used for measuring emissions in the extremely wide frequency range from 30 MHz to 3 GHz without change of the antenna.

The log-periodic part of the antenna is V-shaped in order to increase system sensitivity in particular between 500 MHz and 1 GHz. Unlike conventional solutions, this gain-increasing measure allows the compact size of the ULTRALOG to be maintained. Optimized symmetry and matching (VSWR) of the ULTRALOG allow its use in EMS measurements where field strengths of 10 V/m or higher are required. The ULTRALOG is supplied without tripod; the tripod shown is available as an extra.




Specifications


Frequency range	30 MHz to 3 GHz	Connector	N female
Polarization	linear	MTBF	>200 000 h
Polarization isolation	>20 dB	Class of application	laboratory
Input impedance	50 Ω	Operating	
VSWR	typ. <2	temperature range	0 °C to +40 °C
Gain above 200 MHz	typ. 8 dB	Dimensions (W × H × L)	approx. 0.6 m × 1.65 m × 1.68 m
Max. input power (T <sub>A</sub> = +40 °C)		Weight	approx. 5 kg
30 MHz	150 W + 100% AM		
80 MHz	300 W + 100% AM		
250 MHz	500 W + 100% AM		
1 GHz	280 W + 100% AM		
3 GHz	180 W + 100% AM		

Ordering information

ULTRALOG	R&S® HL562	4041.3000.02	Recommended extras		
			Tripod, movable	R&S® HL562Z1	4041.3900.02

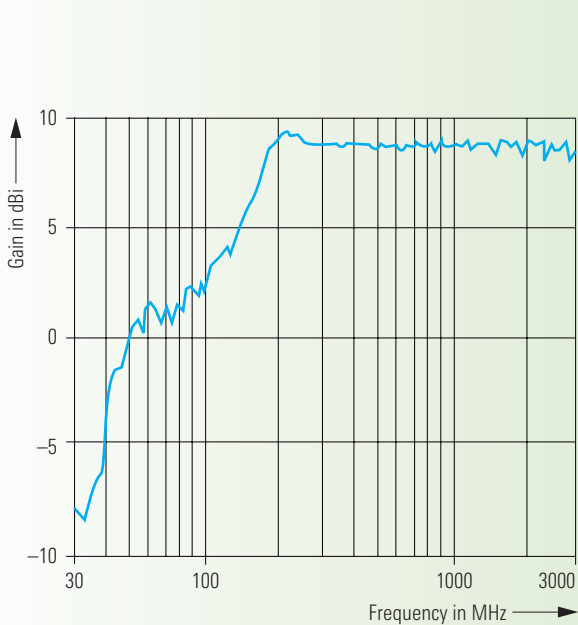

Typical gain

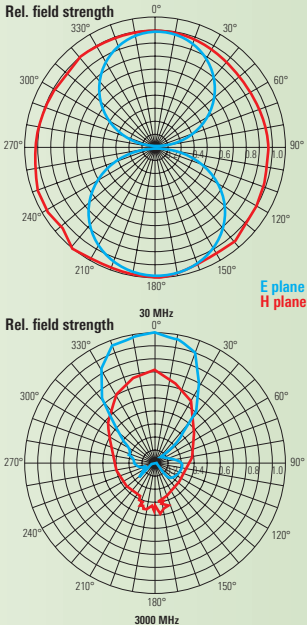

Typical radiation patterns