



ABN 43 064 478 842

➤ 231 osborne avenue clayton south, vic 3169
PO box 1548, clayton south, vic 3169
t 03 9265 7400 f 03 9558 0875
freecall 1800 680 680
www.tmgtestequipment.com.au

Test & Measurement

- sales
- rentals
- calibration
- repair
- disposal

Complimentary Reference Material

This PDF has been made available as a complimentary service for you to assist in evaluating this model for your testing requirements.

TMG offers a wide range of test equipment solutions, from renting short to long term, buying refurbished and purchasing new. Financing options, such as Financial Rental, and Leasing are also available on application.

TMG will assist if you are unsure whether this model will suit your requirements.

Call TMG if you need to organise repair and/or calibrate your unit.


If you click on the “Click-to-Call” logo below, you can call us for FREE!

TMG Corporate Website

TMG Products Website



Click-to-Call
TMG Now

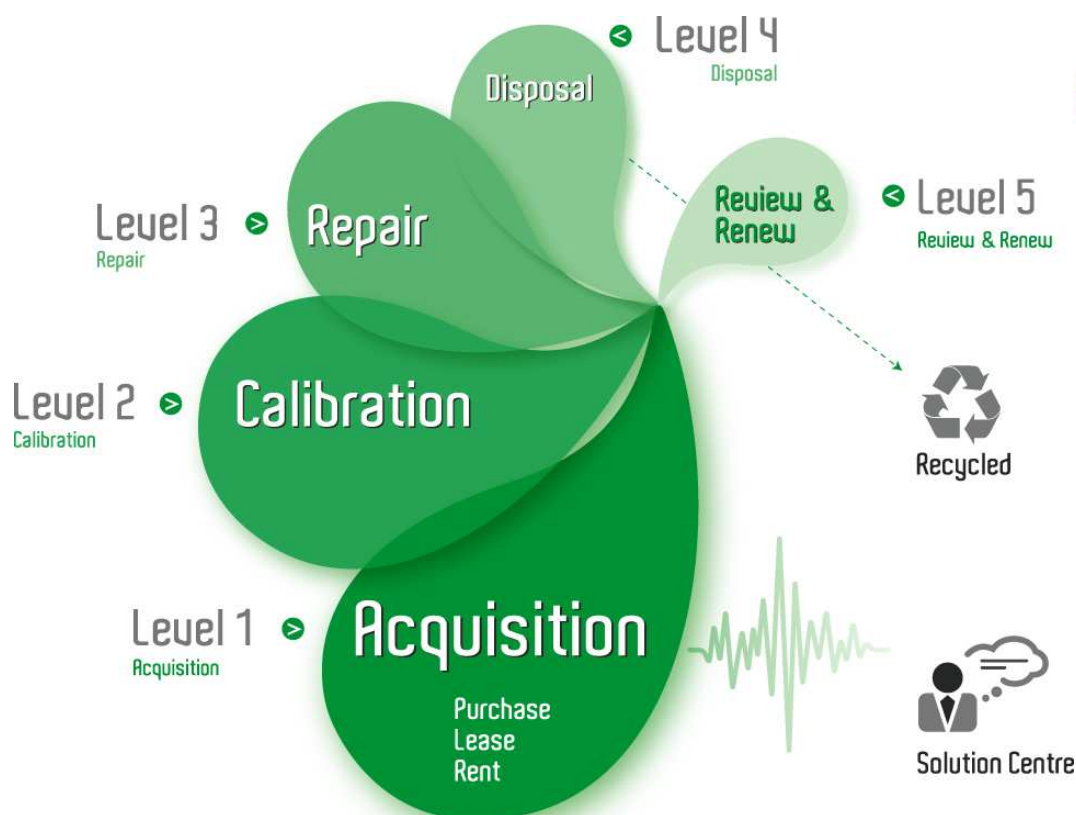

Product Lifecycle Management System

Disclaimer:

All trademarks appearing within this PDF are trademarks of their respective owners.



Electrical Sampling Modules

► 80E01 • 80E02 • 80E03 • 80E04 • 80E06



80E01 Sampling Module

The 80E01 is a single-channel, 50 GHz bandwidth sampling module. The 80E01 has a measured bandwidth ≥ 50 GHz and a calculated rise time ≤ 7.0 ps. Displayed noise is typically $1.8 \text{ mV}_{\text{RMS}}$. The front-panel connector is female 2.4 mm and an SMA adapter is provided (2.4 mm male to 2.92 mm female) to maintain compatibility with SMA connector systems.

80E02 Low-noise Sampling Module

The 80E02 is a dual-channel, 12.5 GHz sampling module specifically designed for low-noise measurements in digital communications and device characterization applications. It provides an acquisition rise time of 28 ps and typically $400 \text{ } \mu\text{VRMS}$ of displayed noise.

The 80E02 is the ideal instrument for low-noise applications. Common applications for the 80E02 are capturing and displaying switching characteristics of high-speed communications circuits, making accurate statistical measurements of signal noise and signal timing jitter, or obtaining stable timing measurements of fast digital ICs.

► Features & Benefits

ALL MODULES

Dual Channel (Except 80E01 and 80E06)

Probe Support (Except 80E06)

80E01

50 GHz Bandwidth

Single Channel

2.4 mm Precision Connector

80E02

12.5 GHz Bandwidth

Dual Channel

Low Noise

80E03

20 GHz Bandwidth

Dual Channel

80E04

20 GHz Bandwidth

Dual Channel

35 ps TDR Reflected Rise Time

True Differential TDR

80E06

70+ GHz Electrical Bandwidth (typical)

Single Channel

$2.0 \text{ mV}_{\text{RMS}}$ Noise (typical)

1.85 mm Precision Connector

► Applications

80E01

High Frequency Acquisition, Fast Rise Time

80E02

Low-level Signals

80E03

Device Characterization, Transmission Quality, Waveform Parameters

80E04

Transmission Line Quality, Impedance Measurements, Crosstalk Measurements

80E06

High-speed Electrical Device Characterization Waveform Parameters

Acquisition of Ultra-fast Rise Time Signals

COMPUTING

COMMUNICATIONS

VIDEO

Electrical Sampling Modules

► 80E01 • 80E02 • 80E03 • 80E04 • 80E06

80E03 Sampling Module

The 80E03 is a dual-channel, 20 GHz sampling module. This sampling module provides an acquisition rise time of 17.5 ps or less.

80E04 TDR Sampling Module

The 80E04 is a dual-channel Time Domain Reflectometry (TDR) sampling module. This sampling module provides an acquisition rise time of 17.5 ps or less, with a typical 20 GHz equivalent bandwidth.

Each channel of the 80E04 is capable of generating a fast step for use in TDR mode and the acquisition portion of the sampling module monitors the incident step and any reflected energy. The reflected rise time of the TDR step is 35 ps or less and the polarity of each channel's step can be selected independently. This allows for differential or common-mode testing of two coupled lines, in addition to the independent testing of isolated lines.

The 80E04 characterizes crosstalk by using the TDR step to drive one line while monitoring a second line with the other channel.

The "filter" function on the CSA8000/TDS8000 can be used with TDR or crosstalk measurements to characterize expected system performance with slower edge rates.

80E06 Electrical Sampling Module

8000 Series Sampling Oscilloscopes configured with the 80E06 – 70+ GHz Electrical Sampling Module – allow users to characterize high-speed devices and circuits. This module's ultra-high bandwidth, coupled with its low noise, provides world-class signal fidelity in the acquired signal. The front panel connector is female 1.85 mm which includes a precision adapter to 2.92 mm with a 50 Ω SMA termination.

► Characteristics

► Electrical Sampling Module Characteristics

	Application Type	Channels	Input Impedance	Channel Input Connector	Bandwidth* ¹
80E01	Microwave General Purpose	1	50 ±0.5 Ω	2.4 mm female Precision adapter to 2.92 mm included with 50 Ω SMA termination	50 GHz
80E02	Low-level Signals	2	50 ±0.5 Ω	3.5 mm female	12.5 GHz* ²
80E03	Device Characterization	2	50 ±0.5 Ω	3.5 mm female	20 GHz* ²
80E04	TDR Impedance Characterization with single-ended, common, differential TDR capability	2	50 ±0.5 Ω	3.5 mm female	20 GHz* ²
80E06	High-speed Electrical Device Characterization	1	50 ±0.5 Ω	1.85 mm female Precision adapter to 2.92 mm included with 50 Ω SMA termination	<i>70+ GHz</i>

	Rise Time (10% to 90%)	Dynamic Range	Offset Range	Maximum Input Voltage	Vertical Number of Digitized Bits
80E01	7 ps (typical)* ²	1.0 V _{p-p}	±1.6 V	±2.0 V	14 bits full scale
80E02	≤28 ps	1.0 V _{p-p}	±1.6 V	±3.0 V	14 bits full scale
80E03	≤17.5 ps	1.0 V _{p-p}	±1.6 V	±3.0 V	14 bits full scale
80E04	≤17.5 ps	1.0 V _{p-p}	±1.6 V	±3.0 V	14 bits full scale
80E06	5.0 ps* ³	1.0 V _{p-p}	±1.6 V	±2.0 V	14 bits full scale

*¹Values shown are warranted unless printed in an italic typeface which represents a non-warranted characteristic value that the instrument will typically perform to.

*²Calculated from 0.35 bandwidth rise time product.

*³80E06 rise time is calculated from formula rise time = 0.35/(typical bandwidth).

Electrical Sampling Modules

► 80E01 • 80E02 • 80E03 • 80E04 • 80E06

► Electrical Sampling Module Characteristics (continued)

	Vertical Sensitivity Range	DC Vertical Voltage Accuracy, Single Point, Within $\pm 2^\circ\text{C}$ of Compensated Temperature	Typical Step Response Aberrations**4	RMS Noise**4
80E01	10 mV to 1.0 V full scale	$\pm [2 \text{ mV} + 0.007 \text{ (Offset)} + 0.02 \text{ (Vertical Value - Offset)}]$	<i>$\pm 3\%$ or less over the zone 10 ns to 20 ps before step transition; +12%, -5% or less for the first 300 ps following step transition; +5.5%, -3% or less over the zone 300 ps to 3 ns following step transition; $\pm 1\%$ or less over the zone 3 ns to 100 ns following step transition; $\pm 0.5\%$ after 100 ns following step transition</i>	1.8 mV $\leq 2.3 \text{ mV}$ (maximum)
80E02	10 mV to 1.0 V full scale	$\pm [2 \text{ mV} + 0.007 \text{ (Offset)} + 0.02 \text{ (Vertical Value - Offset)}]$	<i>$\pm 3\%$ or less over the zone 10 ns to 20 ps before step transition; +10%, -5% or less for the first 300 ps following step transition; $\pm 3\%$ or less over the zone 300 ps to 5 ns following step transition; $\pm 1\%$ or less over the zone 5 ns to 100 ns following step transition; $\pm 0.5\%$ after 100 ns following step transition</i>	400 μV $\leq 800 \mu\text{V}$ (maximum)
80E03	10 mV to 1.0 V full scale	$\pm [2 \text{ mV} + 0.007 \text{ (Offset)} + 0.02 \text{ (Vertical Value - Offset)}]$	<i>$\pm 3\%$ or less over the zone 10 ns to 20 ps before step transition; +10%, -5% or less for the first 300 ps following step transition; $\pm 3\%$ or less over the zone 300 ps to 5 ns following step transition; $\pm 1\%$ or less over the zone 5 ns to 100 ns following step transition; $\pm 0.5\%$ after 100 ns following step transition</i>	600 μV $\leq 1.2 \text{ mV}$ (maximum)
80E04	10 mV to 1.0 V full scale	$\pm [2 \text{ mV} + 0.007 \text{ (Offset)} + 0.02 \text{ (Vertical Value - Offset)}]$	<i>$\pm 3\%$ or less over the zone 10 ns to 20 ps before step transition; +10%, -5% or less for the first 300 ps following step transition; $\pm 3\%$ or less over the zone 300 ps to 5 ns following step transition; $\pm 1\%$ or less over the zone 5 ns to 100 ns following step transition; 0.5% after 100 ns following step transition</i>	600 μV $\leq 1.2 \text{ mV}$ (maximum)
80E06	10 mV to 1.0 V full scale	$\pm [2 \text{ mV} + 0.007 \text{ (Offset)} + 0.02 \text{ (Vertical Value - Offset)}]$	<i>$\pm 5\%$ or less for first 300 ps following step transition</i>	1.8 mV $\leq 2.4 \text{ mV}$ (maximum)

**4 Values shown are warranted unless printed in an italic typeface which represents a non-warranted characteristic value that the instrument will typically perform to.

Electrical Sampling Modules

► 80E01 • 80E02 • 80E03 • 80E04 • 80E06

► TDR System (80E04 only)

	80E04
Channels	2
Input Impedance	50 \pm 0.5 Ω
Channel Input Connector	3.5 mm
Bandwidth	20 GHz
TDR Step Amplitude	250 mV (polarity of either step may be inverted)
TDR System Reflected Rise Time	\leq 35 ps each polarity
TDR System Incident Rise Time	28 ps (typical)
TDR Step Maximum Repetition Rate	200 kHz
TDR System Step Response Aberrations	\pm 3% or less over the zone 10 ns to 20 ps before step transition; +10%, -5% or less typical for the first 400 ps following step transition; \pm 3% or less over the zone 400 ps to 5 ns following step transition; \pm 1% or less after 5 ns following step transition

Physical Characteristics for Electrical Sampling Modules

	Dimensions (mm/in.)			Weight (kg/lbs.)
	Width	Height	Depth	Net
80E01	79/3.1	25/1.0	135/5.3	0.4/0.87
80E02	79/3.1	25/1.0	135/5.3	0.4/0.87
80E03	79/3.1	25/1.0	135/5.3	0.4/0.87
80E04	79/3.1	25/1.0	135/5.3	0.4/0.87
80E06	79/3.1	25/1.0	135/5.3	0.4/0.87

Electrical Sampling Modules

► 80E01 • 80E02 • 80E03 • 80E04 • 80E06

► Ordering Information

80E01

Single Channel, 50 GHz Sampling Module.

Includes: User manual, Calibration data report, precision adapter to 2.92 mm included with 50 Ω SMA termination.

80E01X2 – Bundled ordering configuration provides two 80E01 modules.

80E02

Dual Channel, 12.5 GHz Low-noise Sampling Module.

Includes: User manual, Calibration data report, two 50 Ω SMA terminations.

80E03

Dual Channel, 20 GHz Sampling Module.

Includes: User manual, Calibration data report, two 50 Ω SMA terminations.

80E04

Dual Channel, 20 GHz TDR Sampling Module.

Includes: User manual, Calibration data report, two 50 Ω SMA terminations.

80E06

70+ GHz Electrical Sampling Module.

Includes: User manual, Calibration data report, precision adapter to 2.92 mm with 50 Ω SMA termination.

80E06X2 - Bundled ordering configuration provides two 80E06 modules.

Service Options

Opt. C3 – Three years of Calibration Service.

Opt. C5 – Five years of Calibration Service.

Opt. D1 – Calibration data reports.

Opt. D3 – Three years of Calibration data reports.

Opt. D5 – Five years of Calibration data reports.

Opt. R3 – Extended repair warranty to three years.

Opt. R5 – Extended repair warranty to five years.

Other Accessories

Calibration Step Generator with Power Cords – Standard US – Order 067-1338-00.

A1 – Universal Euro: Order 067-1338-01.

A2 – UK: Order 067-1338-02.

A3 – Australian: Order 067-1338-03.

A4 – North American: Order 067-1338-04.

A5 – Switzerland: Order 067-1338-05.

A6 – Japanese: Order 067-1338-06.

Sampling Module Extender Cable (1 meter length) – Order 012-1568-00.

Sampling Module Extender Cable (2 meter length) – Order 012-1569-00.

2X Attenuator (SMA male-to-female) – Order 015-1001-01.

5X Attenuator (SMA male-to-female) – Order 015-1002-01.

Adapter (2.4 mm male to 2.92 mm female) – Order 011-0157-00.

Power Divider – Order 015-1014-00.

P6209 – 4 GHz Active FET Probe.

P6150 – 9 GHz Passive Probe.

Interconnect Cables

Tektronix recommends using quality high performance interconnect cables with these high bandwidth products in order to minimize measurement degradation and variations. The W.L. Gore & Associates' cable assemblies listed below are compatible with the 2.92 mm, 2.4 mm, and 1.85 mm connector interface of the 80E0x modules. Assemblies can be ordered by contacting Gore by phone at (800) 356-4622, or on the Web at www.goreelectronics.com (click on "Contact Us").

Benchtop Test Cable Assemblies

TEK40PF18PP – Frequency: 40 GHz. Connectors: 2.92 mm male. Length: 18.0 in.

TEK50PF18PP – Frequency: 50 GHz. Connectors: 2.4 mm male. Length: 18.0 in.

TEK65PF18PP – Frequency: 65 GHz. Connectors: 1.85 mm male. Length: 18.0 in.

High-frequency Interconnect Cables for Electrical Sampling Modules

TEK40HF06PP – Frequency: 40 GHz. Connectors: 2.92 mm male. Length: 6.0 in.

TEK40HF06PS – Frequency: 40 GHz. Connectors: 2.92 mm male, 2.92 mm female. Length: 6.0 in.

TEK50HF06PP – Frequency: 50 GHz. Connectors: 2.4 mm male. Length: 6.0 in.

TEK50HF06PS – Frequency: 50 GHz. Connectors: 2.4 mm male, 2.4 mm female. Length: 6.0 in.

TEK65HF06PP – Frequency: 65 GHz. Connectors: 1.85 mm male. Length: 6.0 in.

TEK65HF06PS – Frequency: 65 GHz. Connectors: 1.85 mm male, 1.85 mm female. Length: 6.0 in.

Electrical Sampling Modules

► 80E01 • 80E02 • 80E03 • 80E04 • 80E06

Contact Tektronix:

ASEAN / Australasia / Pakistan (65) 6356 3900

Austria +43 2236 8092 262

Belgium +32 (2) 715 89 70

Brazil & South America 55 (11) 3741-8360

Canada 1 (800) 661-5625

Central Europe & Greece +43 2236 8092 301

Denmark +45 44 850 700

Finland +358 (9) 4783 400

France & North Africa +33 (0) 1 69 86 80 34

Germany +49 (221) 94 77 400

Hong Kong (852) 2585-6688

India (91) 80-2275577

Italy +39 (02) 25086 1

Japan 81 (3) 3448-3010

Mexico, Central America & Caribbean 52 (55) 56666-333

The Netherlands +31 (0) 23 569 5555

Norway +47 22 07 07 00

People's Republic of China 86 (10) 6235 1230

Poland +48 (0) 22 521 53 40

Republic of Korea 82 (2) 528-5299

Russia, CIS & The Baltics +358 (9) 4783 400

South Africa +27 11 254 8360

Spain +34 (91) 372 6055

Sweden +46 8 477 6503/4

Taiwan 886 (2) 2722-9622

United Kingdom & Eire +44 (0) 1344 392400

USA 1 (800) 426-2200

USA (Export Sales) 1 (503) 627-1916

For other areas contact Tektronix, Inc. at: 1 (503) 627-7111

Updated 20 September 2002

Our most up-to-date product information is available at:
www.tektronix.com

Product(s) are manufactured
in ISO registered facilities.



Copyright © 2003, Tektronix, Inc. All rights reserved. Tektronix products are covered by U.S. and foreign patents, issued and pending. Information in this publication supersedes that in all previously published material. Specification and price change privileges reserved. TEKTRONIX and TEK are registered trademarks of Tektronix, Inc. All other trade names referenced are the service marks, trademarks or registered trademarks of their respective companies.

08/03 HB/WWW

85W-13497-6