



ABN 43 064 478 842

231 Osborne Avenue Clayton South, VIC 3169  
PO Box 1548, Clayton South, VIC 3169  
t 03 9265 7400 f 03 9558 0875  
freecall 1800 680 680  
www.tmgtestequipment.com.au

## Test & Measurement

- > sales
- > rentals
- > calibration
- > repair
- > disposal

## Complimentary Reference Material

This PDF has been made available as a complimentary service for you to assist in evaluating this model for your testing requirements.

TMG offers a wide range of test equipment solutions, from renting short to long term, buying refurbished and purchasing new. Financing options, such as Financial Rental, and Leasing are also available on application.

TMG will assist if you are unsure whether this model will suit your requirements.

Call TMG if you need to organise repair and/or calibrate your unit.

If you click on the "Click-to-Call" logo below, you can call us for FREE!

TMG Corporate Website

TMG Products Website



Click-to-Call  
TMG Now



Product Lifecycle Management System

### Disclaimer:

All trademarks appearing within this PDF are trademarks of their respective owners.





# ADA400A Differential Preamplifier

Provides Low Level Signal Acquisition Capability to DSOs

10  $\mu\text{V}/\text{div}$  Sensitivity

Low Pass Filters for 100 Hz, 3 kHz, 100 kHz, and Full (1 MHz)


CMRR: > 100 dB DC to 10 kHz

Selectable Gain: 100, 10, 1, or 0.1

Accurately Measures Signals As Small As 5  $\mu\text{V}$

Ideal for Medical Research, Mechanical Testing, and Medical Equipment Design

No Additional Power Supplies or Cables Required When Used with Oscilloscopes That Have a TekProbe™ BNC Connector Interface

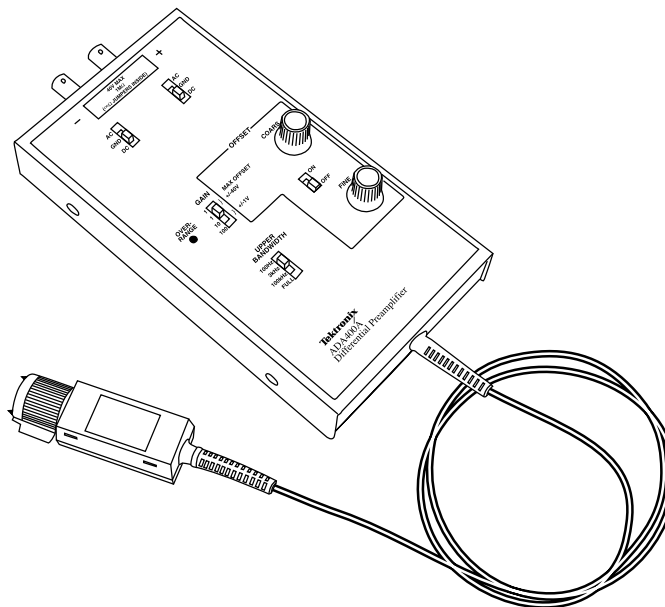

**N**ow low level differential measurements can be made on any Tek scope. The ADA400A preamplifier is perfect for low frequency differential measurements or low amplitude, single ended measurements with lots of noise.

The ADA400A preamplifier is designed for biophysical research and mechanical transducer, medical diagnostic, and imaging equipment design, as well as audio equipment design applications.

## STANDARD SPECIFICATIONS

- Gain Settings**  
0.1, 1, 10, 100
- Differential Signal Range (with DC Offset off)**

0.1	± 80 V
1	± 10 V
10	± 1 V
100	± 100 mV
- Common Mode Signal Range**

0.1, 1	± 40 V
10, 100	± 10 V
- Power Supply**  
TekProbe Power (for non-TekProbe BNC connector scopes use 1103 Power Supply)
- Electrostatic Immunity (per IEC 801-2)**  
> 8 kV
- DC Gain Accuracy**  
± 2%

## TYPICAL CHARACTERISTICS

- CMRR (at gain of 100)**  
> 100 dB (100,000:1) at 10 kHz  
> 90 dB (30,000:1) at 100 kHz
- Input R**  
1 M $\Omega$  (each input)  
( $\infty$   $\Omega$  jumper selectable)
- Input C**  
55 pF ± 20% (each input)
- Offset Range**

0.1, 1	± 40 V
10, 100	± 1 V
- Bandwidth**  
DC to > 1 MHz
- Selectable Filters**  
100 Hz, 3 kHz, 100 kHz
- Output Load Requirements**  
1 M $\Omega$

## PHYSICAL CHARACTERISTICS

- Output Cable Length**  
2 m (6.6 ft)

Weight	kg	lb
Net	1.49	3.3

Dimensions	cm	in
Height	3.6	1.4
Width	11.2	4.4
Length	20.3	8.0




# ADA400A Differential Preamplifier

For further information, contact the nearest Tektronix subsidiary, or:

World Wide Web: <http://www.tek.com>

<b>ASEAN Countries</b> (65) 356-3900	<b>Italy</b> 39 (2) 25-086-1
<b>Australia &amp; New Zealand</b> 61 (2) 888-7066	<b>Japan</b> (Sony/Tektronix Corporation) 81 (3) 3448-3111
<b>Austria</b> 43 (1) 6866020	<b>Korea</b> 82 (2) 528-5299
<b>Belgium</b> 32 (2) 725-96-10	<b>The Netherlands</b> 31 (2503) 95555
<b>Canada</b> 1 (800) 661-5625	<b>Norway</b> 47 (2207) 0700
<b>Central America, Mexico, &amp; Caribbean</b> 52 (5) 666-6333	<b>People's Republic of China</b> 86 (10) 834-7657
<b>Denmark</b> 45 (44) 53 54 55	<b>South America</b> 55 (11) 543-1911
<b>Finland</b> 358 (0) 4783 400	<b>Spain &amp; Portugal</b> 34 (1) 372 6000
<b>France &amp; North Africa</b> 33 (1) 69 86 81 81	<b>Sweden</b> 46 (8) 629 6500
<b>Germany, Eastern Europe, &amp; Middle East</b> 49 (221) 94 77 0	<b>Switzerland</b> 41 42 21 91 92
<b>Hong Kong</b> (852) 2585-6688	<b>Taiwan</b> 886 (2) 765-6362
<b>India</b> 91 (80) 226-5470	<b>UK</b> 44 (1628) 403300
	<b>USA</b> 1-800-426-2200

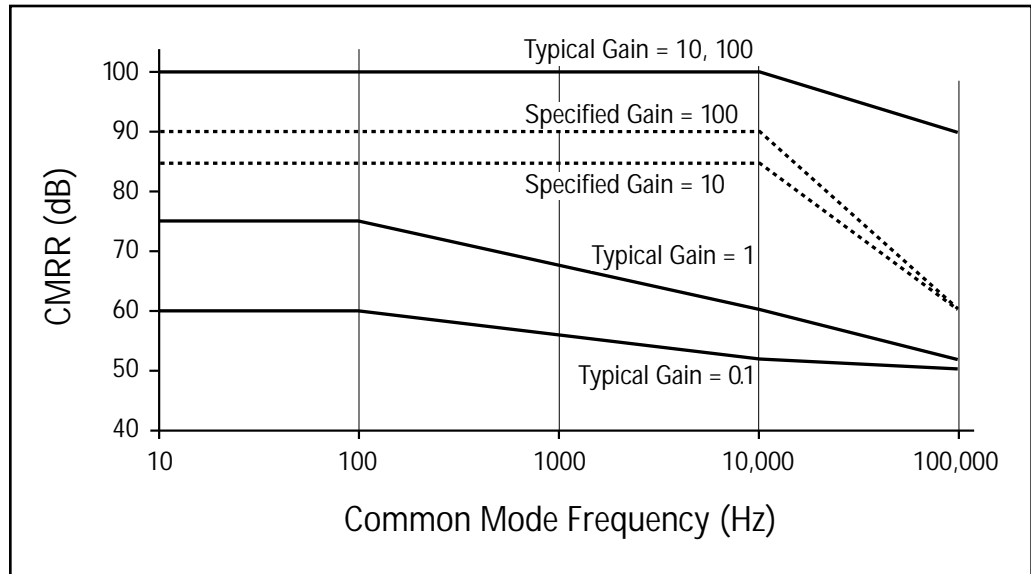

## ORDERING INFORMATION

### ADA400A DIFFERENTIAL PREAMPLIFIER

Includes: Two spare fuses (1/16 A, 250 V), Instruction Manual (070-9164-00)

### RECOMMENDED OSCILLOSCOPES

TDS 400 Series  
TDS 500 Series  
TDS 600 Series  
TDS 700 Series

### RECOMMENDED ACCESSORIES

**P6101B** 1X, 15 MHz Passive Voltage Probe  
**1103** TekProbe Power Supply (for use with non-TekProbe BNC Scopes)

### RELATED PRODUCTS

**P6046** 100 MHz, Active Differential Probe  
**P5200** 25 MHz, 1300 V Differential Probe  
**P6135A** 10X, 500 V, 150 MHz Differential Probe Pair

#### From other areas, contact:

Tektronix, Inc. Export Sales  
P.O. Box 500, M/S 50-255  
Beaverton, Oregon 97077-0001 USA  
(503) 627-1916



Copyright © 1995, Tektronix, Inc. All rights reserved. Printed in U.S.A. Tektronix products are covered by U.S. and foreign patents, issued and pending. Information in this publication supersedes that in all previously published material. Specification and price change privileges reserved. TEKTRONIX and TEK are registered trademarks.