



ABN 43 064 478 842

➤ 231 osborne avenue clayton south, vic 3169
PO box 1548, clayton south, vic 3169
t 03 9265 7400 f 03 9558 0875
freecall 1800 680 680
www.tmgtestequipment.com.au

Test & Measurement

- sales
- rentals
- calibration
- repair
- disposal

Complimentary Reference Material

This PDF has been made available as a complimentary service for you to assist in evaluating this model for your testing requirements.

TMG offers a wide range of test equipment solutions, from renting short to long term, buying refurbished and purchasing new. Financing options, such as Financial Rental, and Leasing are also available on application.


TMG will assist if you are unsure whether this model will suit your requirements.

Call TMG if you need to organise repair and/or calibrate your unit.

If you click on the “Click-to-Call” logo below, you can call us for FREE!

TMG Corporate Website

TMG Products Website

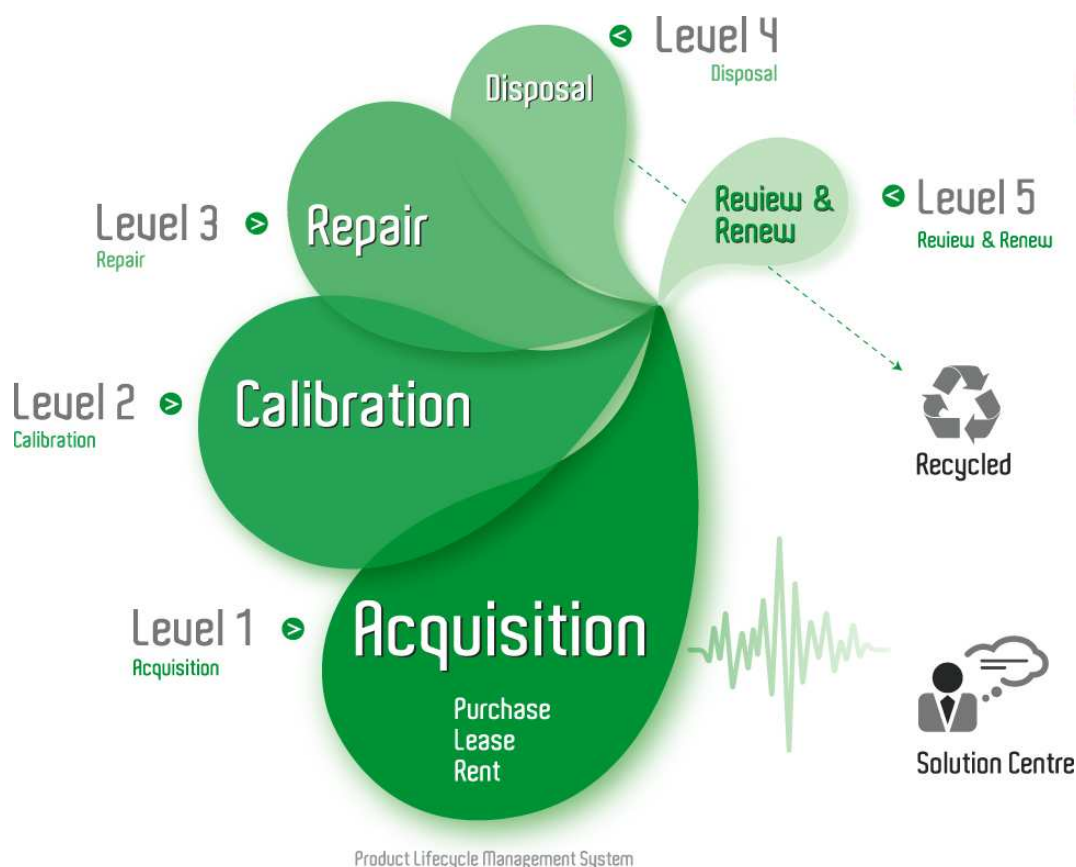

Disclaimer:

All trademarks appearing within this PDF are trademarks of their respective owners.

5.0 GHz Differential Probe with SMA Input

► P7350SMA



Tektronix' brings you the first-available high-speed differential SMA input probe. The P7350SMA provides a tool for measuring differential signals in a 50 Ω signaling environment. Before the introduction of the P7350SMA, most serial data compliance measurements required cabling a differential signal to two oscilloscope channels and applying waveform math to calculate the difference. By integrating a dual 50 Ω termination network and a differential amplifier in the probe head, the P7350SMA measures a differential signal pair on each channel of a multiple channel oscilloscope. Since many of the new high-speed serial data standards define differential signaling on multiple channels, the P7350SMA provides a more efficient measurement solution.

The P7350SMA probe architecture includes an input termination network, a differential buffer amplifier, and a common mode DC bias port. Since many differential data signals operate with a non-zero DC common mode voltage, the DC bias port allows for more flexible interfacing to these logic families. For applications requiring a common mode

DC termination voltage, that voltage can be supplied to the P7350SMA DC bias port through a standard banana plug connector. For other differential measurement applications, such as AC-coupled and some DC-coupled high frequency 8B/10B encoded data streams, the DC bias port can simply be left unconnected.

Input signals use SMA connectors to attach to the input termination network, implemented on a laser-trimmed hybrid circuit for signal fidelity and high frequency responses. The linear buffer amplifier converts the differential input signal to a single-ended output and drives the output signal down the probe cable at full bandwidth.

An active differential buffer amplifier in the probe head enables the P7350SMA probe to move the measurement interface from the oscilloscope front panel to the circuit-under-test. This can reduce the length of electrical interconnect cabling, which for multi-gigabit data signals also reduces frequency dependent loss distortion in signal measurements.

► Features & Benefits

- <100 ps Rise Time (Guaranteed)
- 5.0 GHz Bandwidth (Typical)
- Dual SMA Inputs to Internal 50 Ω Termination Network
- Internal Differential Amplifier with High CMRR
- DC Bias Port for Common Mode Voltage Termination (LVPECL and CML Bias Capability)
- Good Differential Input Return Loss
- Low Input Skew
- Supplied with Low Loss Matched Delay Cables
- TekConnect™ Interface Preserves Signal Integrity to 10 GHz and Beyond to Meet Present and Future Bandwidth Needs

► Applications

Communications

(Gigabit Ethernet, Fibre Channel, InfiniBand)

Semiconductor Characterization and Validation

(PCI-Express, Serial ATA, IEEE 1394, USB 2.0, RAMBUS, DDR)

COMPUTING

COMMUNICATIONS

VIDEO

5.0 GHz Differential Probe with SMA Input

► P7350SMA

► Characteristics

Rise Time –

<100 ps 10% to 90% (guaranteed).

<65 ps 20% to 80% (typical).

Bandwidth (Probe Only) – 5.0 GHz (typical).

Input – SMA.

Attenuation – 6.25X.

Differential Input Resistance – 100 Ω \pm 2%.

Common Mode Input Resistance – 50 Ω \pm 1%.

Input Skew – <1 ps.

Differential Input Range – \pm 2.5 V (20 °C to 30 °C).

Common Mode Input Range – +6.25 V to –5 V.

Maximum Termination Resistor Power – <0.5 W per side*1.

Max Voltage (Non-destruct) – \pm 15 V (DC plus peak AC).

CMRR – >60 dB at DC, >55 dB at 1 MHz, >50 dB at 30 MHz, >30 dB at 1 GHz (typical).

*1 See manual for calculation.

Differential Input Return Loss

Frequency	Differential Return Loss
-----------	--------------------------

625 MHz (fundamental for 1.25 Gbps)	>20 dB
1.25 GHz (fundamental for 2.5 Gbps)	>16 dB
1.56 GHz (fundamental for 3.125 Gbps)	>14 dB
2.50 GHz	>12 dB
3.125 GHz	>10 dB

Noise – Approximately 46 nV/root Hz.

Interface – TekConnect.

Cable Length – 1.2 m.

► Ordering Information

P7350SMA

5.0 GHz Differential SMA Probe for TekConnect Interface.

Includes

50 Ω Terminator – Order 015-0122-xx, 2 each.

Matched Pair SMA Cables, 12 in. – Order 174-4866-xx, 1 set.

Banana Plug Shorting Strap – Order 012-1667-xx, 1 each.

BNC-M to SMA-F Adapter – Order 015-0572-xx, 1 each.

Cable Marker Set (5 colors) – Order 016-1886-xx, 1 each.

Wrist Strap – Order 006-3415-xx, 1 each.

Certificate of Traceable Calibration – 1 each.

Instruction Manual – Order 017-1264-xx, 1 each.

Recommended Accessories

SMA-M to SMA-M Adapter – Order 015-1011-xx, 2 each.

SMA Phase Adjuster Adapter – Order 015-0708-xx, 2 each.

BNC to Banana Adapter – Order 103-0090-xx, 1 each.

TekConnect Calibration Fixture – Order 067-0422-xx, 1 each.

Service Options

Opt. C3 – Calibration service 3 years.

Opt. C5 – Calibration service 5 years.

Opt. D1 – Calibration data report.

Opt. D3 – Calibration data report 3 years (with Option C3).

Opt. D5 – Calibration data report 5 years (with Option C5).

Opt. R3 – Repair service 3 years.

Opt. R5 – Repair service 5 years.

Contact Tektronix:

ASEAN / Australasia / Pakistan (65) 6356 3900

Austria +43 2236 8092 262

Belgium +32 (2) 715 89 70

Brazil & South America 55 (11) 3741-8360

Canada 1 (800) 661-5625

Central Europe & Greece +43 2236 8092 301

Denmark +45 44 850 700

Finland +358 (9) 4783 400

France & North Africa +33 (0) 1 69 86 80 34

Germany +49 (221) 94 77 400

Hong Kong (852) 2585-6688

India (91) 80-2275577

Italy +39 (02) 25086 1

Japan 81 (3) 3448-3010

Mexico, Central America & Caribbean 52 (55) 56666-333

The Netherlands +31 (0) 23 569 5555

Norway +47 22 07 07 00

People's Republic of China 86 (10) 6235 1230

Poland +48 (0) 22 521 53 40

Republic of Korea 82 (2) 528-5299

Russia, CIS & The Baltics +358 (9) 4783 400

South Africa +27 11 254 8360

Spain +34 (91) 372 6055

Sweden +46 8 477 6503/4

Taiwan 886 (2) 2722-9622

United Kingdom & Eire +44 (0) 1344 392400

USA 1 (800) 426-2200

USA (Export Sales) 1 (503) 627-1916

For other areas contact Tektronix, Inc. at: 1 (503) 627-7111

Updated 20 September 2002

Our most up-to-date product information is available at:
www.tektronix.com



Copyright © 2003, Tektronix, Inc. All rights reserved. Tektronix products are covered by U.S. and foreign patents, issued and pending. Information in this publication supersedes that in all previously published material. Specification and price change privileges reserved. TEKTRONIX and TEK are registered trademarks of Tektronix, Inc. All other trade names referenced are the service marks, trademarks or registered trademarks of their respective companies.

04/03 HB/SFI

60W-16671-0