



ABN 43 064 478 842

231 Osborne Avenue Clayton South, VIC 3169  
PO Box 1548, Clayton South, VIC 3169  
t 03 9265 7400 f 03 9558 0875  
freecall 1800 680 680  
www.tmgtestequipment.com.au

## Test & Measurement

- > sales
- > rentals
- > calibration
- > repair
- > disposal

## Complimentary Reference Material

This PDF has been made available as a complimentary service for you to assist in evaluating this model for your testing requirements.

TMG offers a wide range of test equipment solutions, from renting short to long term, buying refurbished and purchasing new. Financing options, such as Financial Rental, and Leasing are also available on application.

TMG will assist if you are unsure whether this model will suit your requirements.

Call TMG if you need to organise repair and/or calibrate your unit.


If you click on the "Click-to-Call" logo below, you can call us for FREE!

TMG Corporate Website

TMG Products Website



Click-to-Call  
TMG Now

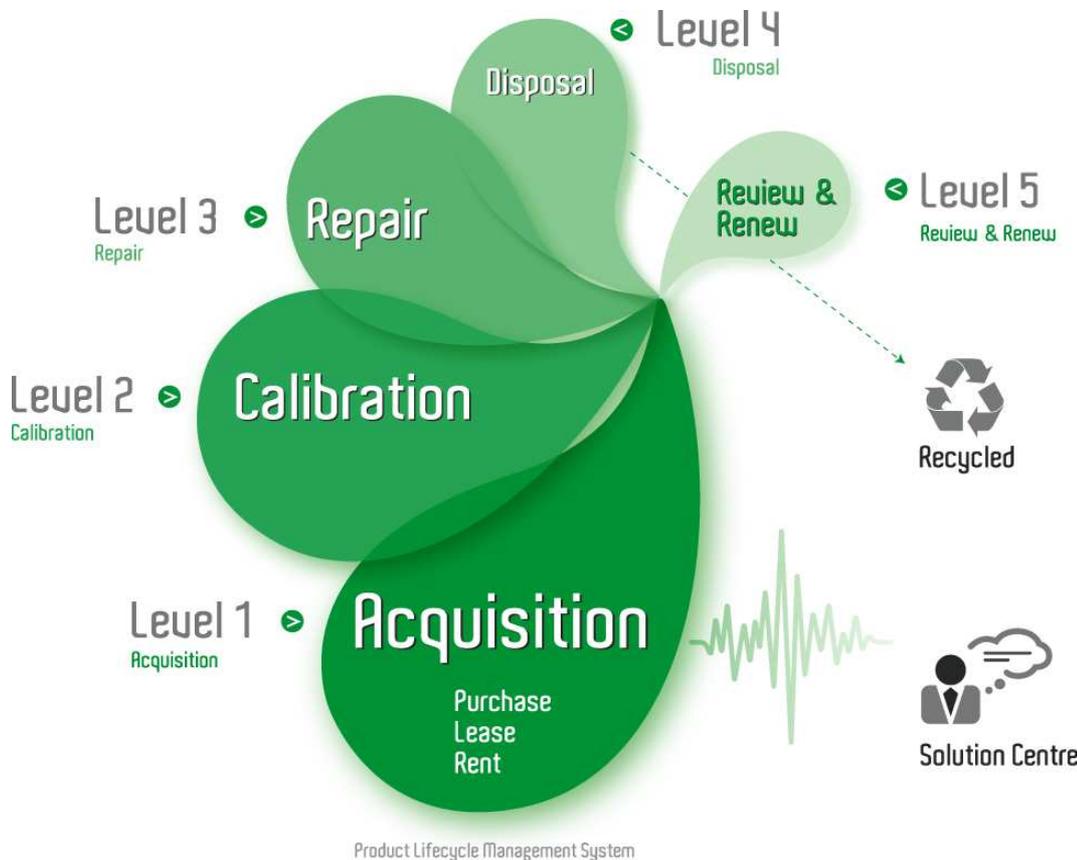

Product Lifecycle Management System

### Disclaimer:

All trademarks appearing within this PDF are trademarks of their respective owners.



# VNA Master™ MS2024A/MS2026A and MS2034A/MS2036A

Handheld Vector Network and Spectrum Analysis  
for General Purpose Applications



# Introducing VNA Master™ plus Spectrum Analysis

RF engineers and technicians in the field provide a valuable service as they support defense and general purpose communication systems around the world. They ensure radars on Navy ships are operational. They test antennas on Army vehicles. They perform flight-line test on Air Force and commercial jets. They maintain communication systems on Marine expeditionary fighting vehicles. They support VHF Omni-directional Range (VOR) in radio navigational systems throughout the world. They ensure direction finding (DF) reconnaissance systems precisely pinpoint threats.






Equally valuable are the primary test instruments that serve these applications: vector network analyzer, spectrum analyzer, power meter, and vector voltmeter. In the factory, these handheld instruments are also especially attractive for lowering cost-of-test and minimizing capital equipment expenditures.



Anritsu introduces the MS202xA VNA Master and the MS203xA VNA Master plus Spectrum Analysis that offers these individual test capabilities in a handheld, battery-operated, rugged multi-function instrument. The VNA Master easily replaces bulky and obsolete bench-top instruments with a more efficient-to-use handheld instrument so technicians can freely roam the sites they service. This freedom increases their productivity as they phase match cables, identify sources of interference, and troubleshoot transmitters. The VNA Master is so ideally suited for cable and antenna measurements in the field that it can also double as a low-cost alternative in manufacturing and R&D.

Feature	Models	Benefit
Two-port vector network analysis	ALL	Verify antennas, phase match cables, and find problems using Distance-to-Fault (DTF)
Broad spectrum analysis (100 kHz to 7.1 GHz)	MS2034A/36A	Supports common aerospace, defense, and wireless communications standards
Broad power meter (10 MHz to 7.1 GHz)	MS2034A/36A	Convenient power measurements without using external detector
Optional power monitor measurements (1 MHz to 20 GHz)	ALL	More accurately troubleshoot transmitters in the field using external detector
Optional high accuracy power meter, PSN50 (50 MHz to 6 GHz)	ALL	Integrated power meter that rivals bench top power meters
Optional Vector Voltmeter (VVM) mode	ALL	Replace obsolete instrument and external accessories with more turnkey solution
Ergonomically designed controls	ALL	Easy-to-learn and easy-to-use for optimizing operator productivity
Handheld battery-operated RF test solution	ALL	Freely roam the site without AC power

# Introducing the VNA Masters: MS2024A/MS2026A/MS2034A/MS2036A

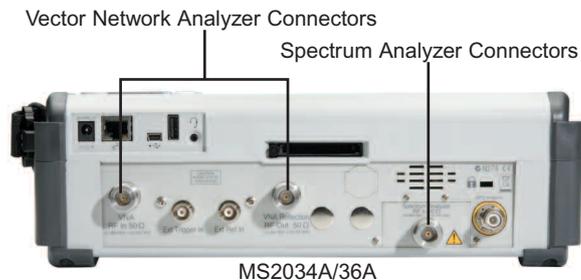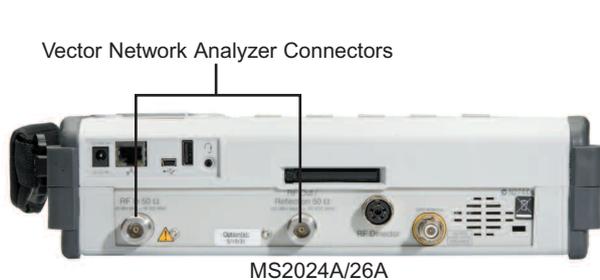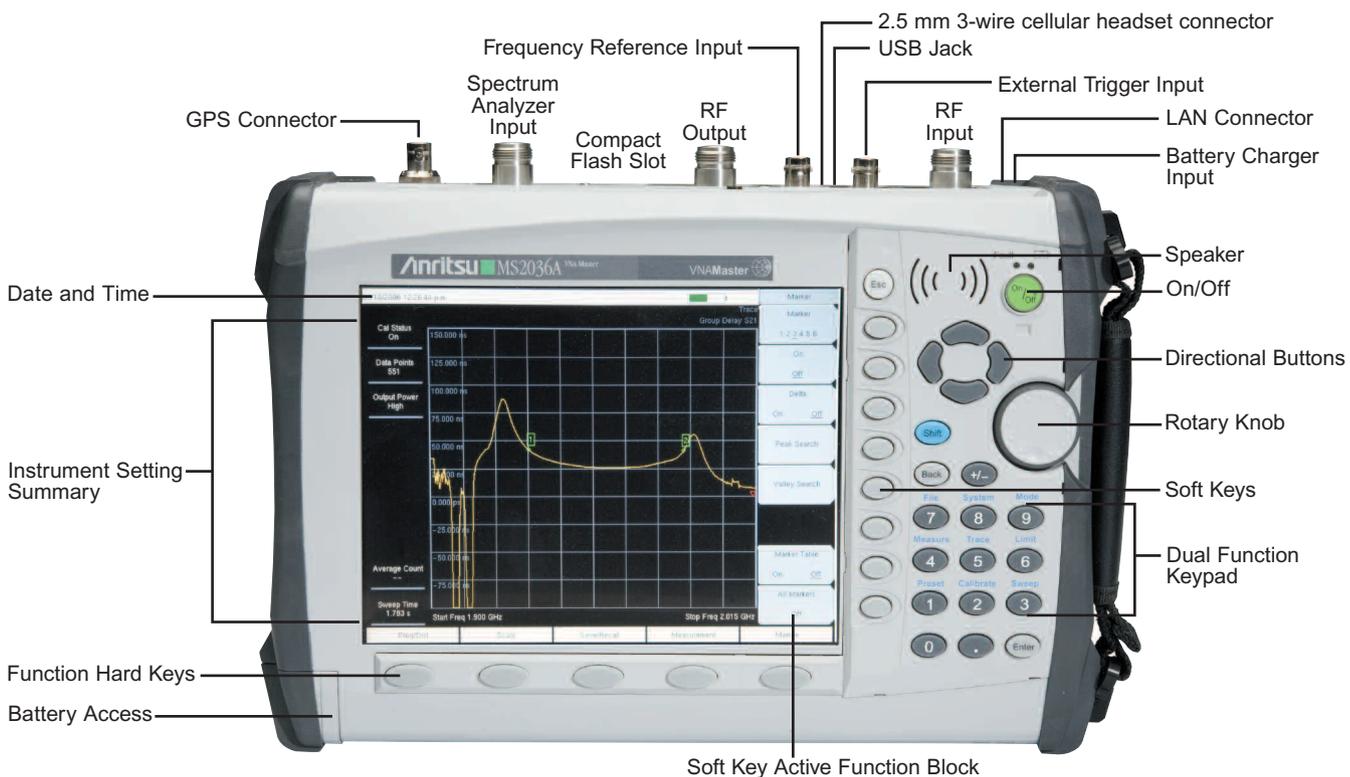


Feature (MS202xA, MS203xA)	Benefit
Light weight (less than 4 kg. including battery) and rugged design	Convenient operation anywhere, anytime
Large 8.4 in. full-color TFT display screen	At-a-glance results and instrument settings improves operator productivity
Type N female RF connectors	Easy-to-connect with proven reliability in severe environments
Soft keys, directional buttons, and rotary knob	Tactile feedback enables precise control of instrument settings
LAN and USB 2.0 (full-speed) connections	Latest connections for data transfer, data archival, and firmware upgrades
Rechargeable and field replaceable Li-Ion Battery	Conduct measurements for >2.5 hours on a single charge
256 MB storage	Store and easily access more than 4,000 traces and 4,000 measurements setups
Remote programming via Ethernet	Increase productivity by automating repetitive or operator intensive tasks

# Convenient VNA Measurements Anywhere, Anytime

Cables and antennas are a vital part of any communication system that unfortunately can degrade over time due to corrosion, water damage, or excessive deployment time. Phase matched cables are even more susceptible to these kinds of problems. Ideally, one can avoid the fix-after-failure scenario by routinely sweeping these critical components to detect earlier these potentially catastrophic problems. A field-friendly vector network analyzer can simplify this task.

The VNA Master is a 1-port and 2-port handheld vector network analyzer (VNA), which uses the superior Frequency Domain Reflectometry (FDR) approach instead of the DC pulse technique of older Time Domain Reflectometry (TDR) approaches. Using FDR, the VNA Master provides convenient 1-port measurements of return loss, VSWR, cable loss, Distance-To-Fault (DTF), and Smith Chart measurements in the field. Connect the VNA Master to a 2-port cable to measure cable loss, phase, and group delay. In other words, the VNA Master offers precise measurement capabilities for cables and antennas by simplifying S11 and S21 measurements in the field.

The VNA Master employs vector correction after an open-short-load calibration to ensure accuracy, repeatability, and overall quality of 1-port and 2-port measurements. As an improvement over traditional scalar measurement approaches, the VNA Master removes all the systematic errors associated with the 1-port reflection measurements, including directivity, source match, and reflection tracking. Additionally, the VNA Master removes transmission response errors and transmission source match errors (i.e., a 1-path, 2-port correction) when conducting 2-port transmission measurements. The vector correction of the VNA Master offers superior measurement accuracy for detecting problems or phase matching cables in a convenient handheld product so you can perform VNA measurements anywhere, anytime.

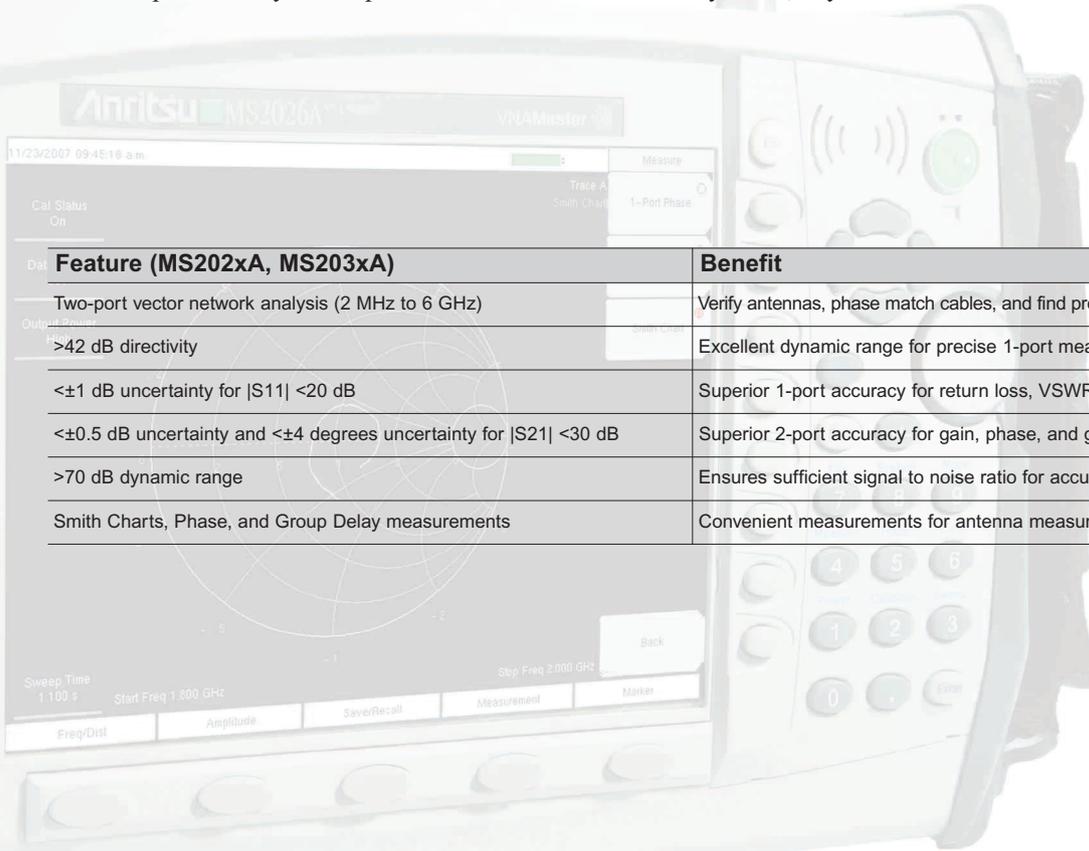

Feature (MS202xA, MS203xA)	Benefit
Two-port vector network analysis (2 MHz to 6 GHz)	Verify antennas, phase match cables, and find problems using Distance-to-Fault (DTF)
>42 dB directivity	Excellent dynamic range for precise 1-port measurements
<±1 dB uncertainty for  S11  <20 dB	Superior 1-port accuracy for return loss, VSWR, and cable loss measurements
<±0.5 dB uncertainty and <±4 degrees uncertainty for  S21  <30 dB	Superior 2-port accuracy for gain, phase, and group delay measurements
>70 dB dynamic range	Ensures sufficient signal to noise ratio for accurate transmission measurements
Smith Charts, Phase, and Group Delay measurements	Convenient measurements for antenna measurements and phase matching cables

# Convenient VNA Master Plus Spectrum Analysis Anywhere, Anytime

In addition to cables and antennas, the typical communication system also contains more sophisticated transmitters, receivers, and signal separation components. These additional components increase the complexity of the overall system, which becomes especially difficult to maintain when there is an intermittent problem. A field-friendly spectrum analyzer can simplify this task.



The VNA Master plus Spectrum Analysis (i.e., MS203xA) adds the capability to conduct spectrum analysis in the field to the already powerful MS202xA! Don't let the small footprint fool you, this instrument offers performance and features that rivals bench-top alternatives for simplifying spectrum monitoring, interference analysis, and other general purpose signal measurements in the field. The VNA Master offers broad spectrum analysis frequency coverage, impressive dynamic range, and excellent phase noise performance from 100 kHz to 7.1 GHz.

The VNA Master plus Spectrum Analysis includes many standard measurements. These measurements include field strength, occupied bandwidth, channel power, adjacent channel power ratio, and carrier to interference (C/I) ratio. In addition, the built-in AM/FM/SSB demodulator simplifies the task of identifying interfering signals. Overall, the VNA Master is a powerful handheld tool for general purpose spectrum analysis anywhere, anytime.

Feature (MS203xA)	Benefit
Broad spectrum analysis (100 kHz to 7.1 GHz)	Embraces a large number of wireless and defense communications standards
Wide dynamic range (100 dB typical)	Easily observe low-level spurious or interfering sources near sites
Excellent DANL (with preamp): -163 dBm in 1 Hz RBW	Reveals problematic signals near sites
Superior Single Side Band (SSB) Phase Noise of <-100 dBc/Hz at 10 kHz offsets	Evaluate local oscillators and observe close-in performance of transmitters
Fast sweep speed of 200 ms in 10 MHz span	Real-time sweeps to detect intermittent signals
Powerful markers: 6 markers, 7 marker modes, and marker table display	Sophisticated marker functions to quickly extract measurement results
New quasi-peak detector and CISPR bandwidths	Economy EMC pre-compliance solution



# Typical Vector Network Analyzer Measurements at a Glance


VNA Master performs a variety of RF measurements aimed at simplifying the task for the technician and engineer. VNA Master is the first handheld VNA to display 1-port and 2-port S-parameter measurements. A single key selection on the bottom hard keys brings up all the RF measurements you need, whether you are performing flight-line test, cable and antenna maintenance, or S-parameters in the lab.



S11 Smith Chart

## S11 Log Magnitude/Return Loss/VSWR/Smith Chart


VNA Master's S11 measurements can be used in the lab or in manufacturing to measure the match of attenuators, antennas, cables, filters, amplifiers, or any other passive and active components. In the field, Return Loss is used to characterize cable and antenna systems to ensure conformance to system specifications. Select VSWR display and view results in dB or linear scales. Choose Smith Chart to simplify impedance matching of transmission lines or to tune antennas.

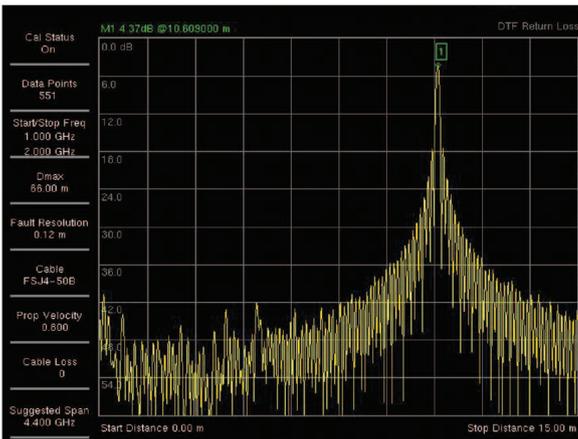

Distance-To-Fault

## Distance-To-Fault (DTF)

VNA Master's Distance-To-Fault (DTF) measurement is used in the field to precisely locate faults within cable and feedline systems by displaying magnitude discontinuities in dB or VSWR over distance in meters or feet. The DTF display is obtained by performing a sweep in the frequency domain and then, by using the inverse Fast Fourier Transform, the data is converted to the time domain. Different windowing types (frequency filters) give the user the flexibility to trade off sidelobes for pulse width.

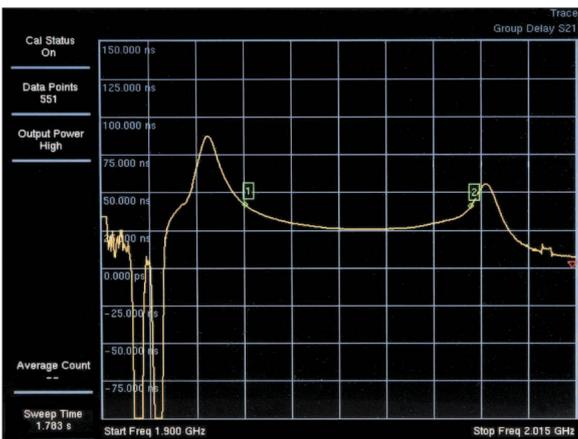


S21 Log Magnitude / Group Delay

## S21 Log Magnitude / Group Delay

VNA Master's 2-Port measurements feature different output power levels: "High" (0 dBm) and "Low" (-35 dBm). Use the "High" power setting to precisely measure the insertion loss of passive devices such as cables, filters, and attenuators. Alternatively, use the "Low" power setting to avoid saturating amplifiers during measurements. In addition to log magnitude measurements, display types of phase and group delay simplifies phase matching cables and overall system measurements.

# Typical Spectrum Analyzer Measurements at a Glance


VNA Master plus Spectrum Analysis, the MS203xA series, performs a variety of RF measurements aimed at simplifying the task for the technician and engineer. A single key selection on the bottom hard keys brings up all the RF measurements you need, whether you are performing spectrum monitoring, interference analysis, or other general purpose signal measurements in the field.

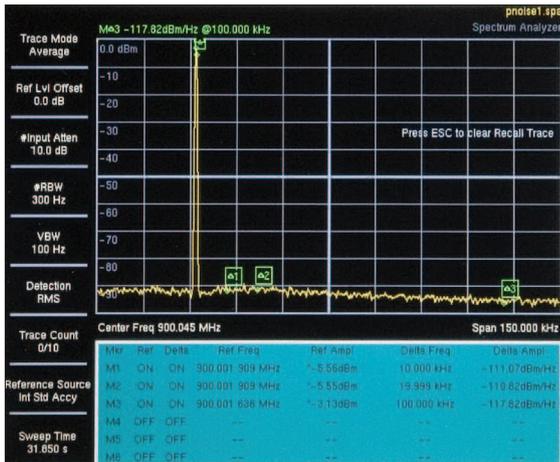

Phase Noise

## Phase Noise


Connect to the MS203xA and observe the true spectral purity of your local oscillators and signals. The VNA Master, with typical phase noise of  $-110$  dBc/Hz at 10 kHz offset, conveniently verifies your most demanding phase noise specifications. Use flexible phase noise markers and convenient marker table features to further optimize, observe, and archive measurement results.

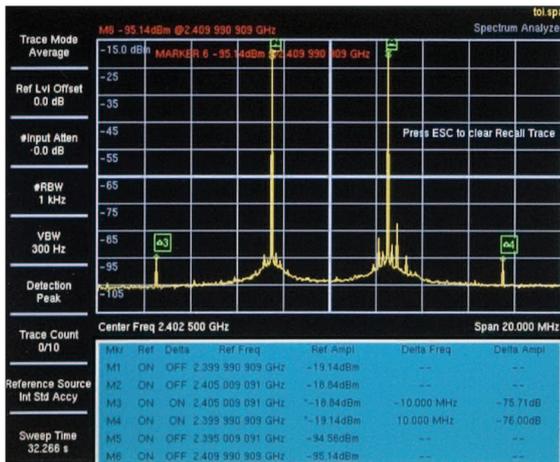

Signal Measurements

## Signal Measurements

The MS203xA's typical dynamic range of 100 dB allows the measurement of very small signals in the presence of much larger signals. Wide dynamic range also means you can use wider resolution bandwidths to increase the sweep speed of this normally time-consuming measurement. With six markers and an easy-to-read marker table, the VNA Master provides powerful measurement capabilities in the field.

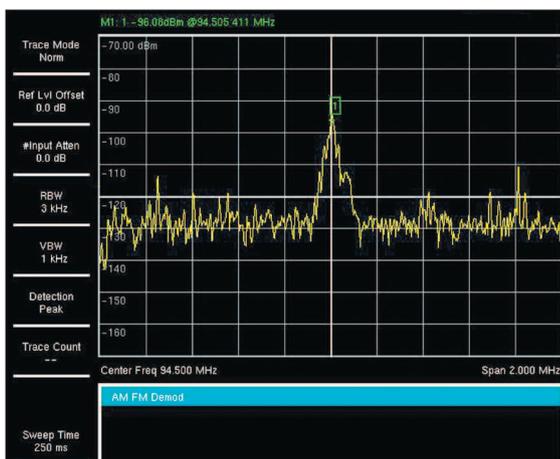

AM, FM and SSB Demodulation

## AM/FM/SSB Demodulation

A built-in demodulator for AM, narrowband FM, wideband FM and single sideband (selectable USB and LSB) allows a technician to easily identify interfering signals. The demodulated audio can be heard either through the built-in speaker or through a standard 3-wire headset. A demodulation marker is provided for easy tuning.

# Extend the Capabilities with Valuable Network Analysis Options

## Power Monitor (Option 5)


With the Anritsu 560 series detectors, technicians can accurately measure broadband power up to 50 GHz. These high precision detectors significantly help minimize mismatch uncertainty with detector flatness better than 0.5 dB up to 18 GHz.

The Power Monitor also features:

- Measurement range (-50 to +20 dBm)
- Display range (-80 to +80 dBm)
- Display formats: absolute power (dBm or Watts) and relative power (dB or %).
- Built-in auto averaging automatically reduces noise effects.
- Zeroing allows optimum measurement accuracy at low power levels.



The easy-to-view Power Monitor display minimizes keystrokes when testing in the field.




## Bias Tee (Option 10)

The integrated, variable Bias Tee is designed to supply bias to a tower mount amplifier (TMA) or other active device. This bias is supplied from the center conductor of the RF In port on the VNA Master, delivering a variable +12 to +24V in 3V steps.


## Vector Voltmeter (Option 15)

The VNA Master offers a field-friendly version of the popular vector voltmeter for phase matching cables. In this approach, the VNA Master provides an optional user interface with display types of impedance, dB, and VSWR for 1- and 2-port measurements.

The VNA Master contains the signal generator, couplers, phase measurement receiver, and now the user interface of this popular approach. Field engineers can now upgrade their tools without impacting existing maintenance procedures by adding this popular user interface to the already easy-to-learn VNA Master.

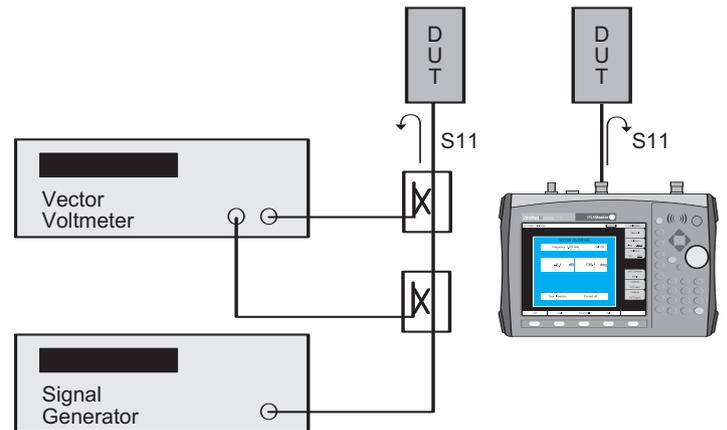

A side-by-side comparison shows how the VNA Master is a more convenient instrument for phase matching cables in the field.

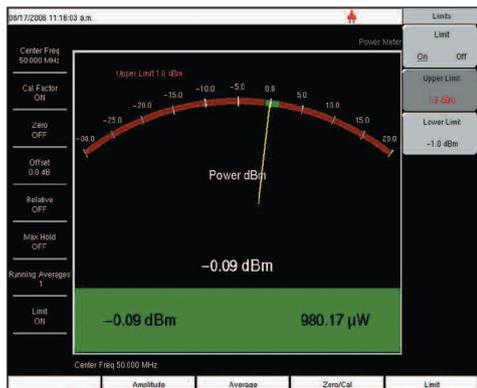

High Accuracy Power Meter provides true RMS measurements from -30 dBm to +20 dBm.


## High Accuracy Power Meter (Option 19)

Anritsu's PSN50 sensor makes high accuracy power measurements from 50 MHz to 6 GHz and provides true RMS measurements from -30 dBm to +20 dBm. This enables users to make precise measurements of CW and digitally modulated signals in the field. Users will also find:


- Convenient connection via a USB A/mini-B cable
- Power displayed in both dBm and Watts
- Optional upper/lower limit activation during Pass/Fail measurements

Option 19 adds support for the PSN50 Sensor, which is purchased separately.


# Extend the Capabilities with More Valuable Spectrum Analysis Options

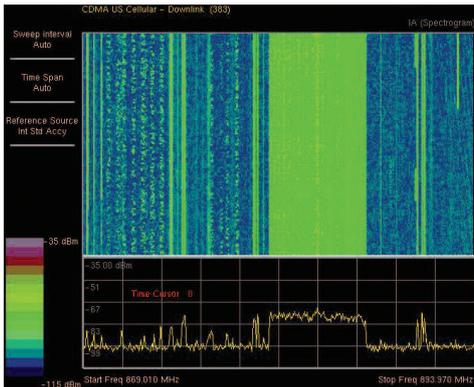


With Option 25, spectrogram measurements identifies intermittent interference.

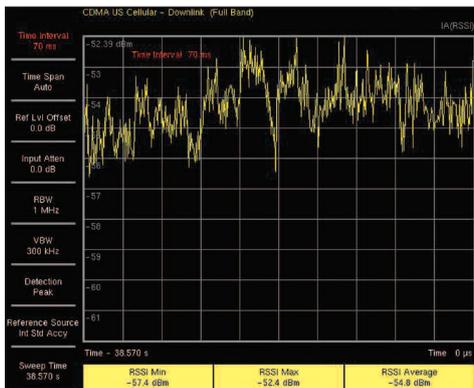

With Option 25, RSSI measurement analyzes signal strength of a signal over time.

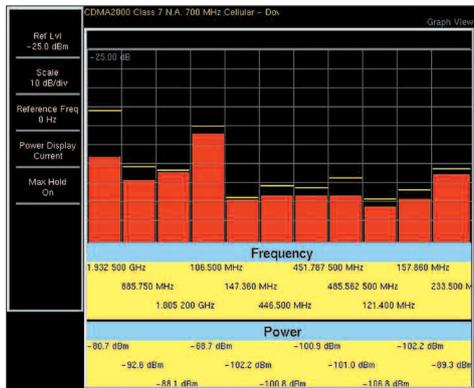

With Option 27, channel scanner measures power of multiple transmitters.

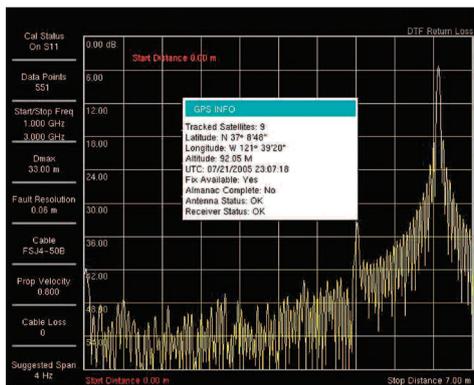

GPS Receiver

## Interference Analyzer (Option 25)

With its built-in low-noise preamplifier, the MS203xA with interference analyzer option provides the ability to identify and locate interfering signals down to the noise floor, allowing technicians to better address the quality issues that affect user service.

## Spectrogram

The Spectrogram display is a three dimensional display of frequency, power, and time of the spectrum. It is applicable for identifying intermittent interference and tracking signal levels over time. The MS203xA can save data for up to 72 hours.

## RSSI

The received signal strength indicator (RSSI) can be used to observe the signal strength of a single frequency over time. Data can be collected for up to 72 hours.

## Channel Scanner (Option 27)


The channel scanner option measures the power of multiple transmitted signals and is very useful for measuring channel power in up to 20 channels at the same time. Display data in graph or table format. In the custom setup menu each channel can be custom built with different frequency, bandwidth, or channels for convenient simultaneous analysis of a variety of different signal standards.

## GPS Receiver (Option 31)

Built-in GPS provides precise location (latitude, longitude, and altitude) and Universal Time (UT) information to help the user verify that measurements are taken at the right location. The VNA Master then stamps each trace and stores the GPS location information. The GPS option also includes a convenient magnet-mount antenna with a 15-foot (5m) cable for the car, truck or any other useful surface.

# Master Software Tools and Remote Programming

Each VNA Master ships with a test assistant: a copy of Anritsu's Master Software Tools for Windows® 2000/XP/Vista. This allows an operator to add the processing capabilities of a PC and this software utility to the VNA Master to form a powerful and flexible measurement solution for both network and spectrum analysis. For automation, the VNA Master also supports remote programming via the Ethernet interface.

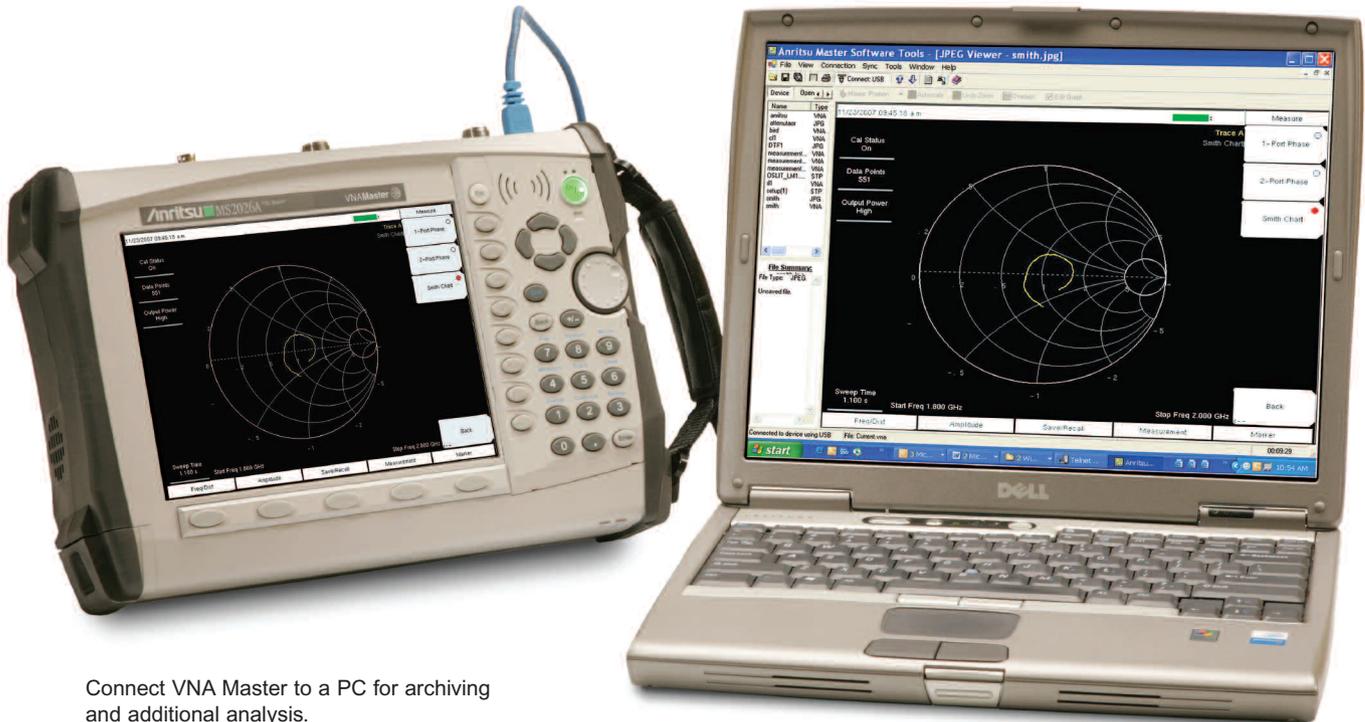

Connect VNA Master to a PC for archiving and additional analysis.

## Benefits of Master Software Tools (MST) and Remote Programming with VNA Master:

Feature	Benefit
Powerful data management tool for storing and organizing measurement results	MST simplifies transfers, printing, and archival of displays and setups
Connect to a PC using USB2.0 (full-speed), Ethernet LAN, or Direct Ethernet	Unleash powerful MST capabilities by using a variety of popular interfaces
Store an unlimited number of setups, traces, and JPEGs (limited only by PC memory)	Develop libraries of frequently used setups and typical results
Overlay traces and further optimize displays	Versatility to further optimize results without re-taking measurements
Add, edit, and manage limit lines using Master Software Tools	Powerful Pass/Fail assistant
Update VNA Master with the latest firmware	Easily access and upgrade to newest features from <a href="http://www.us.anritsu.com">www.us.anritsu.com</a>
Remote programming via Ethernet	Increase throughput by automating repetitive or operator intensive tasks

# Specifications

## Vector Network Analyzer Specifications

Frequency Range	2 MHz to 4 GHz (with MS2024A, MS2034A, operational down to 1 MHz) 2 MHz to 6 GHz (with MS2026A, MS2036A, operational down to 1 MHz)	
Frequency Accuracy	25 ppm	
Frequency Resolution	10 Hz	
Data Points	Low, Medium, High (137/275/551)	
Interference Immunity	On-Channel	+17 dBm
	On-Frequency	0 dBm (RF Out), +30 dBc (RF In)
1-Port Power	High:	0 dBm (typical)
2-Port Power	High	0 dBm (typical)
	Low:	-35 dBm (typical)
Corrected Directivity	42 dB (2 MHz to 6 GHz)	
1-Port Accuracy	$= <0.8 +  20 \log(1 \pm 10^{-E\Delta/20}) $ dB, typical; $E\Delta$ = Directivity – Measured Return Loss	
Dynamic Range	70 dB, 2 MHz to 10 MHz 80 dB, 10 MHz to 3 GHz 70 dB, >3 GHz to 5.5 GHz 65 dB, >5.5 GHz to 6 GHz	
Return Loss	Range:	0 to 60 dB
	Resolution	0.01 dB
VSWR	Range:	1 to 65
	Resolution	0.01
Cable Loss	Range:	0 to 30 dB
	Resolution	0.01 dB
1-Port Phase	Range:	-180° to +180°
	Resolution:	0.01°
Smith Chart	Resolution:	0.01
2-Port Gain	Range:	-120 to 100 dB
	Resolution:	0.01 dB
2-Port Phase	Range:	-180° to +180°
	Resolution:	0.01°
Distance-To-Fault	Fault Resolution (meters):	$(1.5 \times 10^8 \times v_p)/f$ ; $v_p$ is the propagation constant and $f$ is F2-F1 in Hz
	Horizontal Range (meters):	0 to (data points-1) x Fault Resolution to a maximum of 1500m (4921 ft.) where datapoints = 137/275/551
	Vertical Range (Return Loss):	0 to 60 dB
	Vertical Range (VSWR):	1 to 65

## Spectrum Analyzer Specifications

Frequency Range	100 kHz to 4 GHz (with MS2034A) 100 kHz to 7.1 GHz (with MS2036A)		
Maximum Continuous Input	+30 dBm		
Tuning Resolution	1 Hz		
Frequency Reference	Aging: $\pm 1$ ppm/10 years Accuracy: $\pm 0.3$ ppm ( $25^\circ \text{C} \pm 25^\circ \text{C}$ ) + aging		
Frequency Span	10 Hz to 7.1 GHz plus 0 Hz (zero span)		
Sweep Time	Minimum 100 ms, 10 $\mu\text{s}$ in zero span		
Sweep Trigger	Free run, Single, Video, External		
Resolution Bandwidth	(-3 dB width) 1 Hz to 3 MHz in 1-3 sequence $\pm 10\%$ ; 0-span, 1 Hz to 1 MHz 8 MHz demodulation bandwidth		
Video Bandwidth	(-3 dB width) 1 Hz to 3 MHz in 1-3 sequence		
SSB Phase Noise	-100 dBc/Hz max at 10, 20, and 30 kHz offset from carrier -102 dBc/Hz max at 100 kHz offset from carrier		
Amplitude Measurement Range	DANL to +30 dBm		
Absolute amplitude accuracy	100 kHz to $\leq 10$ MHz, $\pm 1.5$ dB		
Power Levels $\geq 50$ dBm, $\leq 35$ dB input attenuation, Preamplifier Off, $-10^\circ \text{C}$ to $55^\circ \text{C}$	>10 MHz to 4 GHz, $\pm 1.25$ dB >4 GHz to 7.1 GHz, $\pm 1.75$ dB		
Displayed Average Noise Level (DANL in 1 Hz RBW, 0 dB attenuation, Reference level -50 dBm, preamp on)	Frequency	Max (Preamp On)	Max (Preamp Off)
	10 MHz to 1 GHz	-161 dBm	-137 dBm
	>1 GHz to 2.2 GHz	-159 dBm	-133 dBm
	>2.2 GHz to 2.8 GHz	-143 dBm	-126 dBm
	>2.8 GHz to 4.0 GHz	-159 dBm	-136 dBm
	>4.0 GHz to 7.1 GHz	-154 dBm	-127 dBm
Display Range	1 to 15 dB/div in 1 dB steps. Ten divisions displayed		
Amplitude Units Log Scale Modes	dBm, dBV, dBmV, dB $\mu$ V		
Attenuator Range	0 to 65 dB		
Attenuator Resolution	5 dB steps		


# Specifications

## Power Meter Specifications


Frequency Range	10 MHz to 4 GHz (with MS2034A) 10 MHz to 7.1 GHz (with MS2036A)
Display Range	-80 dBm to +80 dBm
Measurement Range	-60 dBm to +30 dBm
Offset Range	0 to +60 dB
Accuracy	-40 dBm <Max <=+15 dBm 10 MHz -4 GHz: $\pm 1.25$ dB 4 GHz -7.1 GHz: $\pm 1.75$ dB  Max > +15 dBm 10 MHz -6.5 GHz: $\pm 1.75$ dB 6.5 GHz -7 GHz: $\pm 2$ dB  Max < -40 dBm 10 MHz -4 GHz: $\pm 1.5$ dB 4 GHz -7.1 GHz: $\pm 1.75$ dB
VSWR	1.5:1 typical
Maximum Power	+30 dBm (1W) without external attenuator

## Vector Network Analyzer Uncertainty Curves


VNA Master Reflection Magnitude uncertainties (S21=0)

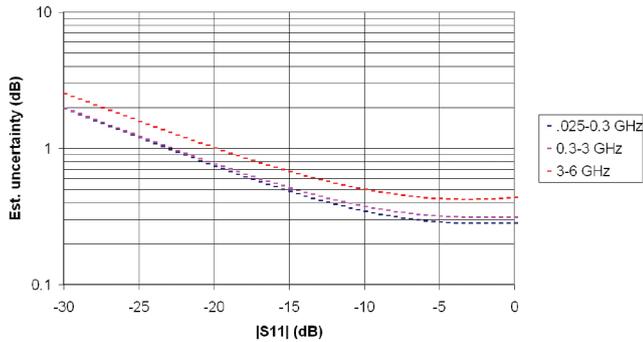


VNA Master Reflection Phase uncertainties (S21=0)

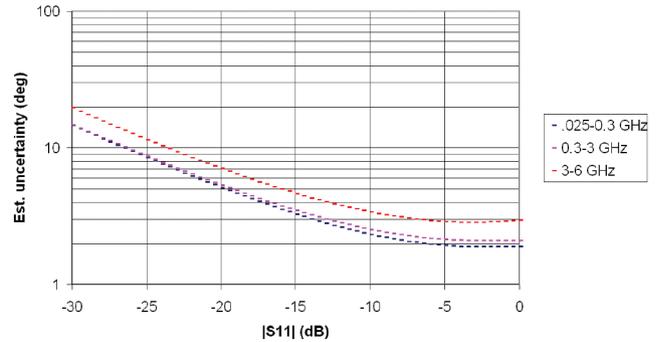

VNA Master Transmission Magnitude uncertainty (S11=0)

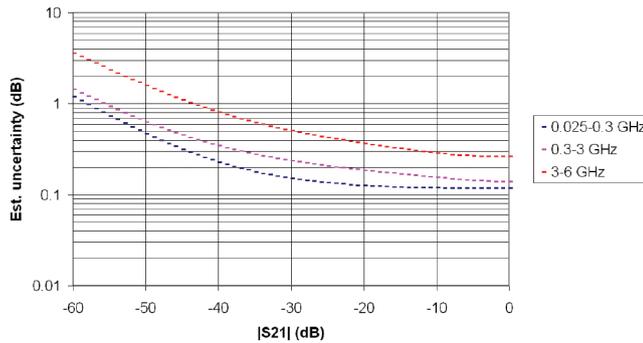

VNA Master Transmission Phase uncertainty (S11=0)

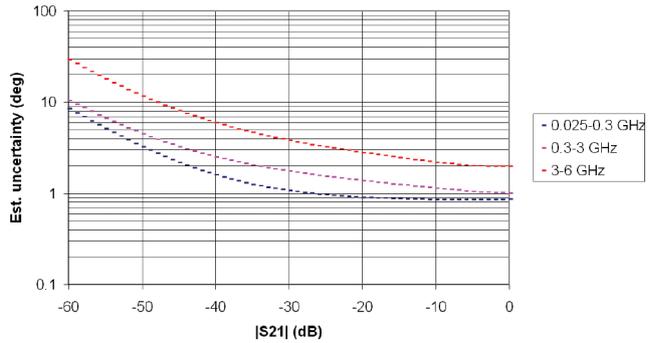

The uncertainty graphs above provide measurement uncertainty at 23° C after vector correction for the standard N connector type. Errors are worst-case contributions of residual directivity, source match, frequency response, network analyzer dynamic range, and connector repeatability. For the 1-path 2-port measurements, transmission tracking, crosstalk and physical load match termination was added. OSLN50-1 calibration components were used.

# Specifications

## Power Monitor (Option 5) requires external detector

**Display Range:** -80 to +80 dBm (10 pW to 100 kW)

**Measurement Range:** -50 to +20 dBm (10 nW to 40 mW)

**Offset Range:** 0 to +60 dB

**Resolution:** 0.1 dB, 0.1 xW (x = n,  $\mu$ , m based on detector power)

**Accuracy:**  $\pm 1$  dB maximum for  $> -40$  dBm using 560-7N50B detector

**Power Monitor:** Detectors (see [www.anritsu.com](http://www.anritsu.com) for additional detectors)

### 560-7N50B:

Frequency Range: 0.01 to 20 GHz

Impedance: 50  $\Omega$

Return Loss: 15 dB,  $< 0.04$  GHz

22 dB,  $< 8$  GHz

17 dB,  $< 18$  GHz

14 dB,  $< 20$  GHz

Input Connector: N(m)

Frequency Response:  $\pm 0.5$  dB,  $< 18$  GHz  
 $\pm 1.25$  dB,  $< 20$  GHz

### 560-7S50B:

Frequency Range: 0.01 to 20 GHz

Impedance: 50  $\Omega$

Return Loss: 15 dB,  $< 0.04$  GHz

22 dB,  $< 8$  GHz

17 dB,  $< 18$  GHz

14 dB,  $< 20$  GHz

Input Connector: N(m)

Frequency Response:  $\pm 0.5$  dB,  $< 18$  GHz  
 $\pm 1.25$  dB,  $< 20$  GHz

## Bias Tee (Option 10)

**Voltage/Current:** +12V, 250, or 500 mA steady rate

+15V, 250, or 500 mA steady rate

+18V, 350 mA steady rate

+21V, 300 mA steady rate

+24V, 250 mA steady rate

## Vector Voltmeter (Option 15)

### CW Frequency Range:

2 MHz to 4 GHz (with MS2024A, MS2034A)

2 MHz to 6 GHz (with MS2026A, MS2036A)

**Measurement Display:** CW, Table (Five Entries, Plus Reference)

**Measurement Types:** Return Loss, Insertion

**Measurement Format:** dB/VSWR/Impedance

## PSN50 High Accuracy Power Meter Functionality (Option 19)

### PSN50 Sensor:

Measurement Range: -30 dBm to +20 dBm

Frequency Range: 50 MHz to 6 GHz

Input Connector: Type N, male, 50  $\Omega$

Max Input without Damage: +33 dBm  $\pm 25$  VDC

Input Return Loss: 50 MHz to 2 GHz:  $\geq 26$  dB

2 GHz to 6 GHz:  $\geq 20$  dB

### PSN50 Accuracy:

Total RSS Measurement Uncertainty (0° C to 50° C):  $\pm 0.16$  dB<sup>1</sup>

Noise: 20 nW max

Zero Set: 20 nW

Zero Drift: 10 nW max<sup>2</sup>

Sensor Linearity:  $\pm 0.13$  dB max

Sensor Cal Factor Uncertainty:  $\pm 0.06$  dB max

Temperature Compensation:  $\pm 0.06$  dB max

Continuous Digital Modulation Uncertainty:  $\pm 0.06$  dB (+17 dBm to +20 dBm)

### PSN50 System:

Measurement Resolution: 0.01 dB

Offset Range:  $\pm 60$  dB

## Interference Analyzer (Option 25)

### Frequency Range:

100 kHz to 4 GHz (with MS2034A)

100 kHz to 7.1 GHz (with MS2036A)

**Strength of the Interferer:** Gives visual and aural indication of signal strength

**RSSI, Spectrogram:** Collect data up to 72 hours

## Channel Scanner (Option 27)

**Frequency Range:** 100 kHz to 4 GHz (with MS2034A)

100 kHz to 7.1 GHz (with MS2036A)

**Number of Channels:** 1 to 20 Channels

## GPS (Option 31) includes GPS antenna

### GPS Location Indicator:

Latitude, Longitude, Altitude, and Universal Time on display

Latitude, Longitude, Altitude, and Universal Time with trace storage

### GPS High Frequency Accuracy when GPS antenna is connected:

$\pm 25$  ppb with GPS ON, three minutes after satellite lock

### Internal High Accuracy when GPS antenna is not connected:

Better than  $\pm 50$  ppb for three days from a High Accuracy GPS Lock and within 0 to 50 degrees centigrade ambient temperature

## General Specifications

### Maximum Input (Damage Level) into Vector Network Analyzer:

Test Port, Type N: +23 dBm,  $\pm 50$  VDC

### Maximum Continuous Input into Spectrum Analyzer:

10 dB attenuation, +30 dBm,  $\pm 50$  VDC

### RF Input VSWR into Spectrum Analyzer:

2.0:1 maximum, 1.5:1 typical ( $\geq 10$  dB attenuation)

### Interfaces:

Type N female RF Connector

Type N female RF Out Port and RF In Port (50  $\Omega$ )

BNC female connectors for external references and external trigger

Reverse BNC connector for GPS antenna

RF Detector: Type N(m) 50  $\Omega$

RJ45 connector for Ethernet 10/100-Base T

2.5 mm 3-wire cellular headset connector

USB mini-A connector

### Environmental:

MIL-PRF-28800F Class 2

Operating: -10° C to 55° C, humidity 85%

Storing: -51° C to 71° C

Altitude: 4600 meters, operating and non-operating

**Safety:** Conforms to EN 61010-1 for Class 1 portable equipment

### Electromagnetic Compatibility:

Meets European Community requirements for CE marking

**Size:** 315 x 211 x 78 mm (12.4 x 8.3 x 3.1 in.) for MS202xA

315 x 211 x 97 mm (12.4 x 8.3 x 3.8 in.) for MS203xA

**Weight:**  $< 2.9$  kg (6.4 lbs) for MS202xA; 4 kg (9 lbs) for MS203xA

<sup>1</sup> Excludes mismatch errors.

Excludes noise, zero set, zero drift for levels  $< -20$  dBm.

Excludes digital modulation uncertainty between +17 and +20 dBm.

<sup>2</sup> After 30 min warm-up

# Ordering Information

## VNA Master™ Models<sup>1</sup>

MS2024A	2-port VNA Master, 2 MHz to 4 GHz
MS2026A	2-port VNA Master, 2 MHz to 6 GHz
MS2034A	2-port VNA Master, 2 MHz to 4 GHz Spectrum Analysis, 100 kHz to 4 GHz
MS2036A	2-port VNA Master, 2 MHz to 6 GHz Spectrum Analysis, 100 kHz to 7.1 GHz

<sup>1</sup>Each instrument includes standard one-year warranty and Certificate of Calibration and Conformance

## MS2024A VNA Master Options

MS2024A-005	Power Monitor (requires external detector)
MS2024A-010	Built-in Bias-Tee
MS2024A-015	Vector Voltmeter
MS2024A-019	High Accuracy Power Meter (PSN50 Not Included)
MS2024A-031	GPS Receiver (includes GPS antenna)

## MS2026A VNA Master Options

MS2026A-005	Power Monitor (requires external detector)
MS2026A-010	Built-in Bias-Tee
MS2026A-015	Vector Voltmeter
MS2026A-019	High Accuracy Power Meter (PSN50 Not Included)
MS2026A-031	GPS Receiver (includes GPS antenna)

## MS2034A VNA Master + Spectrum Analysis Options

MS2034A-005	Power Monitor (requires external detector)
MS2034A-010	Built-in Bias-Tee
MS2034A-015	Vector Voltmeter
MS2034A-019	High Accuracy Power Meter (PSN50 Not Included)
MS2034A-025	Interference Analysis, 100 kHz to 4 GHz (requires external antenna)
MS2034A-027	Channel Scanner, 100 kHz to 4 GHz (requires external antenna)
MS2034A-031	GPS Receiver (includes GPS antenna)

## MS2036A VNA Master + Spectrum Analysis Options

MS2036A-005	Power Monitor (requires external detector)
MS2036A-010	Built-in Bias-Tee
MS2036A-015	Vector Voltmeter
MS2036A-019	High Accuracy Power Meter (PSN50 Not Included)
MS2036A-025	Interference Analysis, 100 kHz to 7.1 GHz (requires external antenna)
MS2036A-027	Channel Scanner, 100 kHz to 7.1 GHz (requires external antenna)
MS2036A-031	GPS Receiver (includes GPS antenna)

## MS2024A/26A Standard Accessories

10580-00166	User's Guide
65729	Soft Carrying Case
64343	Tilt Bail
3-2000-1500	Compact Flash Card (256 MB)
2300-498	Master Software Tools CD ROM
633-44	Rechargeable Li-Ion
40-168	AC-DC Adapter
806-141	Automotive cigarette lighter 12V DC adapter
3-2000-1498	USB A-to mini B cable, 3.05 m (10 ft.)
2000-1371	Ethernet cable, 2.13 m (7 ft.)
2000-1501-R	256 MB USB Flash Drive
3-806-152	Ethernet Crossover Cable, 2.13 m (7 ft.)

## MS2034A/36A Standard Accessories

10580-00166	User's Guide
65729	Soft Carrying Case
3-2000-1500	Compact Flash Card (256 MB)
2300-498	Master Software Tools CD ROM
633-44	Rechargeable Li-Ion
40-168	AC-DC Adapter
806-141	Automotive cigarette lighter 12V DC adapter
3-2000-1498	USB A-to mini B cable, 3.05 m (10 ft.)
2000-1371	Ethernet cable, 2.13 m (7 ft.)
2000-1501-R	256 MB USB Flash Drive
3-806-152	Ethernet Crossover Cable, 2.13 m (7 ft.)

## Manuals

10580-00166	VNA Master User's Guide
10580-00167	VNA Master Programming Manual

## Related Literature, Application Notes

11410-00214	Reflectometer Measurements - Revisited
11410-00206	Time Domain
11410-00270	What is Your Measurement Accuracy?
11410-00185	Distance-To-Fault
11410-00414	High Accuracy Power Meter, PSN50

# Ordering Information

## Optional Accessories

### High Accuracy Power Sensor

PSN50 High Accuracy Power Sensor, 50 MHz to 6 GHz

### Power Monitor Detectors

560-7N50B 0.01 to 20 GHz  
560-7S50B 0.01 to 20 GHz

### Detector Extender Cables

800-109 7.6 m (25 ft)  
800-110 15.2 m (50 ft)  
800-111 30.5 m (100 ft)  
800-112 61.0 m (200 ft)

### Coaxial Calibration Components

OSLN50-1 Precision N(m) Open/Short/Load, 42 dB, 6 GHz  
OSLNF50-1 Precision N(f) Open/Short/Load, 42 dB, 6 GHz  
22N50 Precision N(m) Short/Open, 18 GHz  
22NF50 Precision N(f) Short/Open, 18 GHz  
SM/PL-1 Precision N(m) Load, 42 dB, 6.0 GHz  
SM/PLNF-1 Precision N(f) Load, 42 dB, 6.0 GHz

1091-53 Precision TNC(m) Open, 18 GHz, 50 Ω  
1091-54 Precision TNC(m) Short, 18 GHz, 50 Ω  
1015-55 Precision TNC(m) Load, 18 GHz, 50 Ω  
1091-55 Precision TNC(f) Open, 18 GHz, 50 Ω  
1091-56 Precision TNC(f) Short, 18 GHz, 50 Ω  
1015-54 Precision TNC(f) Load, 18 GHz, 50 Ω

23L50 Precision 3.5 mm(m) Short, 9 GHz  
23LF50 Precision 3.5 mm(f) Short, 9 GHz  
24L50 Precision 3.5 mm(m) Open, 9 GHz  
24LF50 Precision 3.5 mm(f) Open, 9 GHz  
28L50R Precision 3.5 mm(m) Load, 9 GHz  
28LF50R Precision 3.5 mm(f) Load, 9 GHz

2000-767 Precision Open/Short/Load, 7/16(m), 4.0 GHz  
2000-768 Precision Open/Short/Load, 7/16(f), 4.0 GHz

### Precision Adapters

34NN50A N(m)-N(m), DC to 18 GHz, 50 Ω  
34NFN50 N(f)-N(f), DC to 18 GHz, 50 Ω

### Adapters

1091-26 N(m)-SMA(m), DC to 18 GHz, 50 Ω  
1091-27 N(m)-SMA(f), DC to 18 GHz, 50 Ω  
1091-80 N(f)-SMA(m), DC to 18 GHz, 50 Ω  
1091-81 N(f)-SMA(f), DC to 18 GHz, 50 Ω

510-102 N(m)-N(m), 90° right angle, DC to 11 GHz, 50 Ω

510-90 7/16 DIN(f)-N(m), DC to 7.5 GHz, 50 Ω  
510-91 7/16 DIN(f)-N(f), DC to 7.5 GHz, 50 Ω  
510-92 7/16 DIN(m)-N(m), DC to 7.5 GHz, 50 Ω  
510-93 7/16 DIN(m)-N(f), DC to 7.5 GHz, 50 Ω  
510-96 7/16 DIN(m)-7/16 DIN(m), DC to 7.5 GHz, 50 Ω  
510-97 7/16 DIN(f)-7/16 DIN(f), DC to 7.5 GHz, 50 Ω

513-62 Adapter, TNC(f) to N(f), 18 GHz, 50 Ω  
1091-315 Adapter, TNC(m) to N(f), 18 GHz, 50 Ω  
1091-324 Adapter, TNC(f) to N(m), 18 GHz, 50 Ω  
1091-325 Adapter, TNC(m) to N(m), 18 GHz, 50 Ω  
1091-317 Adapter, TNC(m) to SMA(f), 18 GHz, 50 Ω  
1091-318 Adapter, TNC(m) to SMA(m), 18 GHz, 50 Ω  
1091-323 Adapter, TNC(f) to TNC(f), 18 GHz, 50 Ω  
1091-326 Adapter, TNC(m) to TNC(m), 18 GHz, 50 Ω



### Test Port Cables Armored

15NN50-1.5C 1.5 m, N(m)-N(m), 6 GHz, 50 Ω  
15NN50-3.0C 3.0 m, N(m)-N(m), 6 GHz, 50 Ω  
15NN50-5.0C 5.0 m, N(m)-N(m), 6 GHz, 50 Ω  
15NNF50-1.5C 1.5 m, N(m)-N(f), 6 GHz, 50 Ω  
15NNF50-3.0C 3.0 m, N(m)-N(f), 6 GHz, 50 Ω  
15NNF50-5.0C 5.0 m, N(m)-N(f), 6 GHz, 50 Ω  
15ND50-1.5C 5.0 m, N(m)-7/16 DIN(m), 6 GHz, 50 Ω  
15NDF50-1.5C 5.0 m, N(m)-7/16 DIN(f), 6 GHz, 50 Ω

### Port Antennas

2000-1030 SMA(m), 1.71 to 1.88 GHz, 50 Ω  
2000-1031 SMA(m), 1.85 to 1.99 GHz, 50 Ω  
2000-1032 SMA(m), 2.4 to 2.5 GHz, 50 Ω  
2000-1035 SMA(m), 896 to 941 MHz, 50 Ω  
2000-1200 SMA(m), 806 to 869 MHz, 50 Ω  
2000-1361 SMA(m), 5725 to 5825 MHz, 50 Ω  
2000-1473 SMA(m), 870 to 960 MHz, 50 Ω  
2000-1474 SMA(m), 1.71 to 1.88 GHz, 50 Ω  
2000-1475 SMA(m), 1920 to 1980, 2.11 to 2.17 GHz, 50 Ω

61532 Antenna Kit: 2000-1030, 2000-1031, 2000-1032, 2000-1035, 2000-1200, and 2000-1361

### Limiters

1N50C Limiter, N(m) to N(f), 50 Ω, 0.01 to 50 GHz

### Attenuator

42N50-20 Attenuator, 20 dB, 50 W, DC to 18 GHz, N(m)-N(f)  
42N50A-30 Attenuator, 30 dB, 50 W, DC to 18 GHz, N(m)-N(f)

### GPS Antenna

2000-1410 Magnet Mount GPS Antenna with 15 ft (4.6 m) cable

### Hard Transit Case

760-243-R Hard Transit Case with wheels and retractive handle for Anritsu Handheld Master products

### Rack Mount Kit

66864 Rack Mount Kit, Master Platform (MS2024A, MS2026A only)



#### **ANRITSU Corporation**

5-1-1 Onna, Atsugi-shi, Kanagawa, 243-8555 Japan  
Phone: +81-46-223-1111  
Fax: +81-46-296-1264

#### **- U.S.A.**

##### **ANRITSU Company**

1155 East Collins Boulevard, Suite 100,  
Richardson, Texas 75081  
Toll Free: 1-800-ANRITSU (267-4878)  
Phone: +1-972-644-1777  
Fax: +1-972-671-1877

#### **- Canada**

##### **ANRITSU Electronics Ltd.**

700 Silver Seven Road, Suite 120, Kanata,  
Ontario K2V 1C3, Canada  
Phone: +1-613-591-2003  
Fax: +1-613-591-1006

#### **- Brazil**

##### **ANRITSU Eletrônica Ltda.**

Praca Amadeu Amaral, 27-1 andar  
01327-010 - Paraiso, São Paulo, Brazil  
Phone: +55-11-3283-2511  
Fax: +55-11-3886940

#### **- U.K.**

##### **ANRITSU EMEA Ltd.**

200 Capability Green, Luton, Bedfordshire LU1 3LU, U.K.  
Phone: +44-1582-433280  
Fax: +44-1582-731303

#### **- France**

##### **ANRITSU S.A.**

9, Avenue du Québec Z.A. de Courtaboef  
91951 Les Ulis Cedex, France  
Phone: +33-1-60-92-15-50  
Fax: +33-1-64-46-10-65

#### **- Germany**

##### **ANRITSU GmbH**

Nemetschek Haus, Konrad-Zuse-Platz 1  
81829 München, Germany  
Phone: +49 (0) 89 442308-0  
Fax: +49 (0) 89 442308-55

#### **- Italy**

##### **ANRITSU S.p.A.**

Via Elio Vittorini, 129, 00144 Roma, Italy  
Phone: +39-06-509-9711  
Fax: +39-06-502-2425

#### **- Sweden**

##### **ANRITSU AB**

Borgafjordsgatan 13, 164 40 Kista, Sweden  
Phone: +46-8-534-707-00  
Fax: +46-8-534-707-30

#### **- Finland**

##### **ANRITSU AB**

Teknobulevardi 3-5, FI-01530 Vantaa, Finland  
Phone: +358-20-741-8100  
Fax: +358-20-741-8111

#### **- Denmark**

##### **ANRITSU A/S**

Kirkebjerg Allé 90 DK-2605 Brøndby, Denmark  
Phone: +45-72112200  
Fax: +45-72112210

#### **- Spain**

##### **Anritsu EMEA Ltd.**

##### **Oficina de Representación en España**

Edificio Veganova  
Avda de la Vega, nº 1 (edf 8, pl1, of 8)  
28108 ALCOBENDAS - Madrid, Spain  
Phone: +34-914905761  
Fax: +34-914905762

#### **- United Arab Emirates**

##### **ANRITSU EMEA Ltd.**

##### **Dubai Liaison Office**

P O Box 500413 - Dubai Internet City  
Al Thuraya Building, Tower 1, Suite 701, 7th Floor  
Dubai, United Arab Emirates  
Phone: +971-4-3670352  
Fax: +971-4-3688460

#### **- Singapore**

##### **ANRITSU Pte. Ltd.**

10, Hoe Chiang Road #07-01/02, Keppel Towers,  
Singapore 089315  
Phone: +65-6282-2400  
Fax: +65-6282-2533

#### **- P. R. China (Hong Kong)**

##### **ANRITSU Company Ltd.**

Units 4 & 5, 28th Floor, Greenfield Tower, Concordia Plaza,  
No. 1 Science Museum Road, Tsim Sha Tsui East,  
Kowloon, Hong Kong, P.R. China  
Phone: +852-2301-4980  
Fax: +852-2301-3545

#### **- P. R. China (Beijing)**

##### **ANRITSU Company Ltd.**

##### **Beijing Representative Office**

Room 1515, Beijing Fortune Building,  
No. 5, Dong-San-Huan Bei Road,  
Chao-Yang District, Beijing 100004, P.R. China  
Phone: +86-10-6590-9230  
Fax: +82-10-6590-9235

#### **- Korea**

##### **ANRITSU Corporation, Ltd.**

8F Hyunju Bldg. 832-41, Yeoksam-Dong,  
Kangnam-ku, Seoul, 135-080, Korea  
Phone: +82-2-553-6603  
Fax: +82-2-553-6604

#### **- Australia**

##### **ANRITSU Pty Ltd.**

Unit 21/270 Ferntree Gully Road, Notting Hill  
Victoria, 3168, Australia  
Phone: +61-3-9558-8177  
Fax: +61-3-9558-8255

#### **- Taiwan**

##### **ANRITSU Company Inc.**

7F, No. 316, Sec. 1, Neihu Rd., Taipei 114, Taiwan  
Phone: +886-2-8751-1816  
Fax: +886-2-8751-1817

#### **- India**

##### **ANRITSU Pte. Ltd.**

##### **India Liaison Office**

Unit No.S-3, Second Floor, Esteem Red Cross Bhavan,  
No.26, Race Course Road, Bangalore 560 001 India  
Phone: +91-80-32944707  
Fax: +91-80-22356648

*Please Contact:*

