



ABN 43 064 478 842

231 Osborne Avenue Clayton South, VIC 3169  
PO Box 1548, Clayton South, VIC 3169  
t 03 9265 7400 f 03 9558 0875  
freecall 1800 680 680  
www.tmgtestequipment.com.au

## Test & Measurement

- > sales
- > rentals
- > calibration
- > repair
- > disposal

## Complimentary Reference Material

This PDF has been made available as a complimentary service for you to assist in evaluating this model for your testing requirements.

TMG offers a wide range of test equipment solutions, from renting short to long term, buying refurbished and purchasing new. Financing options, such as Financial Rental, and Leasing are also available on application.

TMG will assist if you are unsure whether this model will suit your requirements.

Call TMG if you need to organise repair and/or calibrate your unit.

If you click on the "Click-to-Call" logo below, you can call us for FREE!

TMG Corporate Website

TMG Products Website



Click-to-Call  
TMG Now



Product Lifecycle Management System

### Disclaimer:

All trademarks appearing within this PDF are trademarks of their respective owners.





# Portable High-Density Network Performance Analysis System SmartBits® 600B

## Product Overview

Spirent Communications' SmartBits 600B chassis is an improved version of the SmartBits 600. The SmartBits 600B is the industry's most portable and compact, high-port-density-for-its-size network performance testing system. Compatible with all of the SmartBits 600x/6000x family of chassis, the SmartBits 600B holds up to two modules that can support up to 16 10/100 Mbps Ethernet ports, 8 Gigabit Ethernet ports, 1 10GbE port, 4 Packet over SONET (POS) ports, 4 Fibre Channel ports, or a mixture of these port types.

SmartBits 600B chassis can be daisy-chained together to achieve higher port density; enabling users to perform automated large-scale testing in Quality Control and high-volume production environments. Up to 512 chassis can be synchronously connected by using SmartBits multi-chassis extension units.

The SmartBits 600B is easily controlled by a host computer through a 10/100 Mbps Ethernet connection and uses a Windows®, Linux, or Solaris-based interface.


## The SmartBits 600B is Designed For:

- **Network Equipment Manufacturers:** Test your device in the lab, then carry it along with a SmartBits 600B, to your customer site to prove your device's performance.

- **Evaluation Labs:** Test and certify different devices from various manufacturers to benchmark their performance.
- **Telcos/ISPs/Enterprise Users:** Perform comparative analysis of network equipment to determine the suitability of a specific application prior to deployment.

## SmartBits 600B Features

- Small, lightweight, and portable.
- Holds up to two modules.
- Supports up to 16 10/100 Ethernet ports, 8 Gigabit Ethernet ports, 1 10GbE port, 4 Packet over SONET (POS) ports, 4 Fibre Channel ports, or a combination of these port types.
- Bundled with three PC-based software applications for comprehensive performance analysis (SmartWindow™, SmartLibrary™, and SmartApplications™).
- Supports sophisticated automated industry standard performance tests defined in RFC 1242 and RFC 2544.
- Supports 10/100 Mbps Ethernet connections to a host PC.
- Provides GPS (Global Positioning System), NTP (Network Timing Protocol), and CDMA (Code Division Multiple Access) TIA/EIA-95B, external timing reference support.
- Supports multi-user operation.
- Rack-mountable.

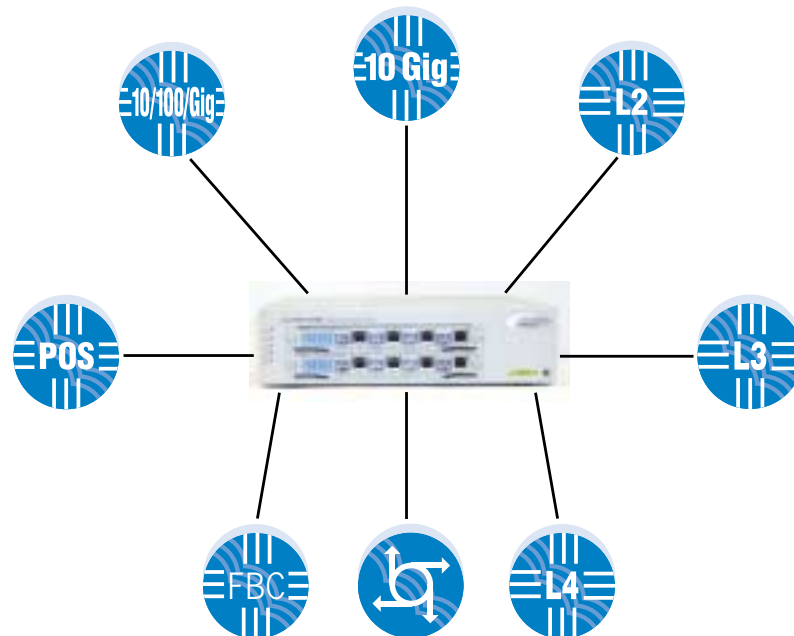

**Spirent  
Communications**  
26750 Agoura Road  
Calabasas, CA  
91302 USA  
E-mail: productinfo  
@spirentcom.com

**Sales Contacts:**  
**North America**  
+1 800-927-2660  
**Europe, Middle East,  
Africa**  
+33-1-6137-2250  
**Asia Pacific**  
+852-2511-3822  
**All Other Regions**  
+1 818-676-2683

www.spirentcom.com



Analyze | Assure | Accelerate™

SmartBits 600B test applications

## Supported Applications

- AST II™
- Block Storage Tester™
- Fabric Services Tester™
- SAN Routing Tester™
- SmartApplications
- SmartBits Automation™
- SmartCableModem Test™
- SmartFabric™
- SmartFlow™
- SmartLibrary
- SmartMulticastIP™
- SmartTCP™
- SmartVoIPQoS™
- SmartWindow
- SmartxDSL™
- TeraRouting Tester™
- TeraVPN Tester™
- Turn Up Connect™
- WebSuite™

## Supported Modules

Select up to two of the following modules, in any combination, to populate the SmartBits 600B chassis' two slots.

(Note: One module is the maximum for modules that require 2-slots.)

Module	Description
<b>ATM-3451A</b>	ATM OC-3c (STM-1c), 2-port, multi-mode, 1300nm, TeraMetrics
<b>ATM-3451As</b>	ATM OC-3c (STM-1c), 2-port, single mode, 1310nm, TeraMetrics
<b>ATM-3453A</b>	ATM OC-3c/OC-12c (STM-1c/STM-4c), 2-port, multi-mode, 1300nm, TeraMetrics
<b>ATM-3453As</b>	ATM OC-3c/OC-12c (STM-1c/STM-4c), 2-port, single mode, 1310nm, TeraMetrics
<b>FBC-3601A</b>	1G Fibre Channel, 2-port, SmartMetrics
<b>FBC-3602A</b>	1G and 2G Fibre Channel, 2-port, SmartMetrics
<b>LAN-3100A</b>	10/100Base-T Ethernet, 8-port
<b>LAN-3101B</b>	10/100Base-T Ethernet, 6-port, SmartMetrics
<b>LAN-3102A</b>	10/100Base-T Ethernet, 2-port, SmartMetrics
<b>LAN-3111A</b>	100Base-FX Ethernet, 6-port, multi-mode, 1300nm, SmartMetrics
<b>LAN-3111As</b>	100Base-FX Ethernet, 6-port, single mode, 1310nm, SmartMetrics
<b>LAN-3150A</b>	10/100Base-T Ethernet, RMI/SMII, 8-port
<b>LAN-3200A</b>	1000Base-SX Ethernet, 2-port, multi-mode, 850nm
<b>LAN-3200As</b>	1000Base-LX Ethernet, 2-port, single mode, 1310nm
<b>LAN-3201B/C</b>	1000Base-X Ethernet, GBIC, 1-port, SmartMetrics
<b>LAN-3300A</b>	10/100/1000Base-T Ethernet, Copper, 2-port, SmartMetrics

Module	Description
<b>LAN-3301A</b>	10/100/1000Base-T Ethernet, Copper, 2-port, TeraMetrics
<b>LAN-3302A</b>	10/100Base-TX Ethernet, Copper, 2-port, TeraMetrics
<b>LAN-3306A</b>	10/100Base-TX Ethernet, Copper, 4-port, TeraMetrics XD
<b>LAN-3310A</b>	1000Base-X Ethernet, GBIC, 2-port, SmartMetrics
<b>LAN-3311A</b>	1000Base-X Ethernet, GBIC, 2-port, TeraMetrics
<b>LAN-3320A</b>	10/100/1000 Mbps and Gigabit Ethernet Fiber, 2-port, SmartMetrics XD
<b>LAN-3321A</b>	10/100/1000 Mbps and Gigabit Ethernet Fiber, 2-port, TeraMetrics XD
<b>LAN-3324A</b>	10/100/1000 Mbps and Gigabit Ethernet Fiber, 4-port, SmartMetrics XD
<b>LAN-3325A</b>	10/100/1000 Mbps and Gigabit Ethernet Fiber, 4-port, TeraMetrics XD
<b>LAN-3327A</b>	10/100/1000 Mbps and Gigabit Ethernet Fiber, 1-port, TeraMetrics XD
<b>LAN-3710AE</b>	10GBase-ER Ethernet, 1-port, 2-slot, single mode, 1550nm
<b>LAN-3710AL</b>	10GBase-LR Ethernet, 1-port, 2-slot, single mode, 1310nm
<b>POS-3500B</b>	POS OC-3c/OC-12c (STM-1c/STM-4c), 1-port, multi-mode, 1300nm, SmartMetrics
<b>POS-3500Bs</b>	POS OC-3c/OC-12c (STM-1c/STM-4c), 1-port, single mode, 1310nm, SmartMetrics
<b>POS-3502A</b>	POS OC-3c (STM-1c), 1-port, multi-mode, 1300nm, SmartMetrics
<b>POS-3502As</b>	POS OC-3c (STM-1c), 1-port, single mode, 1310nm, SmartMetrics
<b>POS-3504As</b>	POS OC-48c (STM-16c), 1-port, single mode, 1310nm, SmartMetrics
<b>POS-3504AR</b>	POS OC-48c (STM-16c), 1-port, single mode, 1550nm, SmartMetrics
<b>POS-3505As</b>	POS OC-48c (STM-16c), 1-port, single mode, 1310nm, TeraMetrics
<b>POS-3505AR</b>	POS OC-48c (STM-16c), 1-port, single mode, 1550nm, TeraMetrics
<b>POS-3510A</b>	POS OC-3c/OC-12c (STM-1c/STM-4c), 2-port, multi-mode, 1300nm, SmartMetrics
<b>POS-3510As</b>	POS OC-3c/OC-12c (STM-1c/STM-4c), 2-port, single mode, 1310nm, SmartMetrics
<b>POS-3511A</b>	POS OC-3c/OC-12c (STM-1c/STM-4c), 2-port, multi-mode, 1300nm, TeraMetrics
<b>POS-3511As</b>	POS OC-3c/OC-12c (STM-1c/STM-4c), 2-port, single mode, 1310nm, TeraMetrics
<b>POS-3518As</b>	POS OC-192c (STM-64c), 1-port, 2-slot, single mode, 1310nm, SmartMetrics
<b>POS-3518AR</b>	POS OC-192c (STM-64c), 1-port, 2-slot, single mode, 1550nm, SmartMetrics

**Spirent Communications**  
 26750 Agoura Road  
 Calabasas, CA  
 91302 USA  
 E-mail: productinfo@spirentcom.com

**Sales Contacts:**  
**North America**  
 +1 800-927-2660  
**Europe, Middle East, Africa**  
 +33-1-6137-2250  
**Asia Pacific**  
 +852-2511-3822  
**All Other Regions**  
 +1 818-676-2683

www.spirentcom.com



Module	Description
<b>POS-3519As</b>	POS OC-192c (STM-64c), 1-port, 2-slot, single mode, 1310nm, TeraMetrics
<b>POS-3519Ar</b>	POS OC-192c (STM-64c), 1-port, 2-slot, single mode, 1550nm, TeraMetrics
<b>XLW-3720A</b>	10GBase Ethernet, Optical, XENPAK, 1-port, 2-slot, SmartMetrics
<b>XLW-3721A</b>	10GBase Ethernet, Optical, XENPAK, 1-port, 2-slot, TeraMetrics

### Requirements

- One SmartBits 600B chassis and up to two modules.
- One Ethernet cable and one 10/100 Ethernet card installed in the PC.
- An IBM or compatible Pentium™ PC running Windows® 2000/NT/XP, with mouse and color monitor.

### Specifications

- SmartBits chassis with two module slots. Controllable over the Internet or from a PC equipped with SmartWindow.
- Input Power: 100-240 VAC. Nominal 115 or 230 VAC, 50-60 Hz.
- Dimensions: 12"W x 3.5"H x 12.5"D (30.8W x 9H x 32.1D cm).
- Weight: 5.25 lbs. (2.38 kg) fully loaded. Shipping Weight approx. 8.5 lbs. (3.85 kg).
- Operating environment: 59° to 104° F (15° to 40° C); 20 to 80% relative humidity. Must have space for unimpeded airflow into the chassis fans.

### Ordering Information

#### SMB-600B

SmartBits 600B (includes SmartWindow, SmartLibrary, and SmartApplications)

#### ACC-6000A

19" Rackmount Option

#### ACC-6001A

24" Rackmount Option

Spirent Communications offers a variety of ServiceEdge™ maintenance and support packages. For more information, visit the Spirent website at [www.spirentcom.com](http://www.spirentcom.com) or contact your Spirent sales representative.

#### Spirent

#### Communications

26750 Agoura Road  
Calabasas, CA  
91302 USA  
E-mail: [productinfo@spirentcom.com](mailto:productinfo@spirentcom.com)

#### Sales Contacts:

##### North America

+1 800-927-2660

##### Europe, Middle East,

##### Africa

+33-1-6137-2250

##### Asia Pacific

+852-2511-3822

##### All Other Regions

+1 818-676-2683

[www.spirentcom.com](http://www.spirentcom.com)



