



ABN 43 064 478 842

➤ 231 Osborne Avenue Clayton South, VIC 3169
 PO Box 1548, Clayton South, VIC 3169
 t 03 9265 7400 f 03 9558 0875
 freecall 1800 680 680
www.tmgtestequipment.com.au

Test & Measurement

- sales
- rentals
- calibration
- repair
- disposal

Complimentary Reference Material

This PDF has been made available as a complimentary service for you to assist in evaluating this model for your testing requirements.

TMG offers a wide range of test equipment solutions, from renting short to long term, buying refurbished and purchasing new. Financing options, such as Financial Rental, and Leasing are also available on application.

TMG will assist if you are unsure whether this model will suit your requirements.

Call TMG if you need to organise repair and/or calibrate your unit.


If you click on the “Click-to-Call” logo below, you can call us for FREE!

TMG Corporate Website

TMG Products Website



**Click-to-Call
TMG Now**

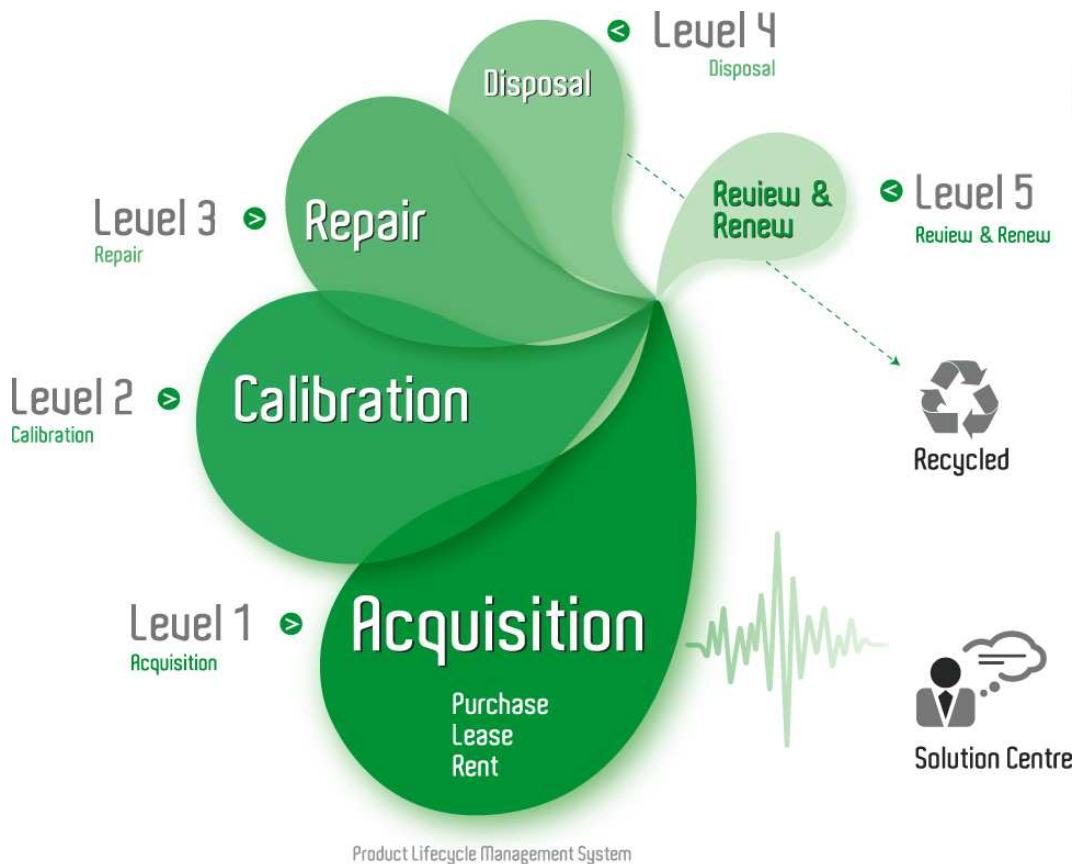

Product Lifecycle Management System

Disclaimer:

All trademarks appearing within this PDF are trademarks of their respective owners.



HIOKI



Introducing the New 8816•31•32•33

AC/DC dual power supply and multi-channel feature make this the most versatile waveform recorder ever!

The New Standard for Today

8815•30 series

MEMORY Hi CORDER




Waveform Recorder





More Compact, More Features-A New Generation

The HIOKI Memory Hi Corder began with the 8801 in 1983, and since then the series has earned high marks in a variety of fields, establishing the waveform recorder as a new class of measurement instrumentation. Today, the Memory Hi Corder series continues to evolve with the appearance of a new generation..... Large-size displays, dual AC/DC power supplies, multi-channel configurations and other functions to meet a diversity of measurement needs. The 8815•30 series is approaching the ideal portable waveform recorder, providing multiple functions and expandability, while carrying on the tradition of Memory Hi Corder high operability and reliability. Here is a new stage of evolution in the 8801•10series, under the same concept of an easy-to-use, economical waveform recorder.

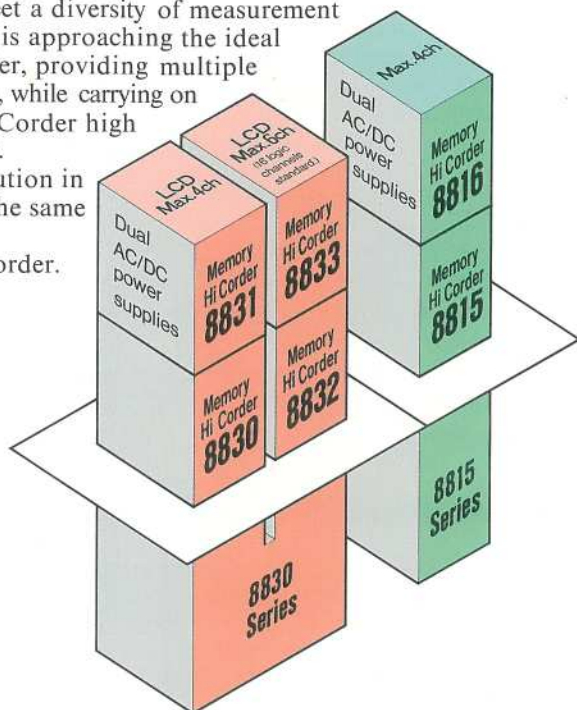

Three functions to meet a variety of on-site needs

1. Transient waveform recording

High-speed waveforms can be captured to the large-capacity memory for automatic recording of irregular abnormal phenomena. You can record high-speed transient phenomena that conventional recorders cannot, and determine the causes.

2. Realtime recording

Clear, high-speed recorder output, with multi-channel recording in realtime including logic signals. Able to handle everything from abrupt variations to low-speed changes over time.

3. High-speed X-Y and continuous X-Y recording

Can handle X-Y variation of low-speed phenomena just like conventional X-Y recorders, along with X-Y recording of high-speed phenomena and transient signals. With the optional ROM card a variety of waveform analyses are also possible.

Simple and reliable. Powerful functions you can use.

We listened to user demands, like "more channels," "view before print," and "signal capture during print." That's why our systems are so easy to use, and offer so many functions. Let us help you get the job done right.

C More compact than ever—the pursuit of portability
COMPACT

The 8815•30 Memory Hi Corder series was designed to provide simple, economical high-speed waveform recording in a variety of on-site applications. So we made it compact. It's even smaller than the highly popular 8810 series, which is famed for small size and light weight, and about two kilograms lighter. And now we offer a model with dual AC/DC power supplies as standard equipment. A complete measurement environment for simple, multifunction application. We've also polished up our already-good noise resistant design to optimize measurement in noisy on-site use.



M The biggest waveforms in its class, on a big LCD panel
MONITOR

Waveform observation and recording in a single system. The 8830 series offers a blue-mode LCD panel with an EL backlight, with the biggest screen in its class: 640 × 200 dots. And because it's backlight, visibility is excellent even in bright environments. You can see the waveform outline at once, and magnify, reduce and scroll it freely. That not only helps cut down on printing paper waste, it let's you get the job done faster. It may be portable, but it delivers easy-to-see waveforms when you need them—right now.



F More powerful than ever with superior operability and expandability
FLEXIBLE

We have worked to answer the many demands of 8810 users, providing enhanced measurement and recording functions designed to be easier to use than ever. Like user exchange of three types of input amplifiers with our plug-in input units. Like the waitless mode that captures signals even during print. Like a large 125kWord memory in the single-channel configuration. And like ROM cards for FFT, harmonic analysis and operations (8830 series only/ROM cards optional). A superbly flexible measurement environment, with an extensive line-up of accessories for every need.



Note) In the photographs in this catalog, all products are shown fully equipped with optional input units.





The optimum functions for all measurement needs. The new addition to the series.

The high-performance portables for today, and a new standard in waveform recorders The 8830 series

Waveform monitor function on large-size liquid crystal display.
The 8830 Memory Hi Corder.

Offers a full selection of advanced functions in a compact body, like large liquid crystal display for monitoring waveforms and a ROM card slot for operation and FFT functions. Above all, small size and light weight. A model that pioneers a new direction for portable waveform recorders.

Portable waveform recorder for field use.
The 8831 Memory Hi Corder.

This model combines the diverse functions and expandability of the 8830 with a dual AC/DC power supply. You can handle field measurements with the model 8831... a dramatic expansion in the range of high-speed waveform recorder application.



8830 Memory Hi Corder



8831 Memory Hi Corder

Full six-channel capability for simultaneous recording of triple-phase current and voltage.

The 8832 Memory Hi Corder.

The standard input unit comes with six analog channels and 16 logic channels. And that means you can simultaneously record current and voltage for triple-phase lines, for example. In addition to the functions of the 8815•30 series, it also offers waveform data backup, scaling and a timer trigger function, just to name a few. High performance worthy of the top-of-the-line model.

Dual AC/DC power supplies for wider application.

The 8833 Memory Hi Corder.

This is the dual AC/DC power supply version of the 8832, meaning that the standard model can be used in the field as well. All of the 8815•30 models now come in dual AC/DC power supply versions, letting you select the functions you need for the job at hand.



8832 Memory Hi Corder



8833 Memory Hi Corder

The high cost performance 8815 series—accent on simplicity

Smaller and easier-to-operate than ever.
The 8815 Memory Hi Corder.

Basic functions are advanced, like all the models in the series. And it carries on the simple operation of the 8810 series in a body that is smaller and lighter than ever. The basic model, with outstanding functions and performance.

Dual AC/DC power supply in a small package.

The 8816 Memory Hi Corder.

The same functions and performance as the 8815, but with dual AC/DC power supply provided as standard equipment. Small lightest model in the 8815•30 series for unmatched portability.



8815 Memory Hi Corder



8816 Memory Hi Corder

High performance made simpler than ever. And new functions born from this approach.


Common functions

● High-speed sampling recorder function


Just like conventional pen recorders, it can handle long-term realtime recording. Sampling, which is equivalent to the pen response speed, is always maximum regardless of chart speed, meaning you can capture abrupt changes all the time.

▼ High speed sampling with response faster than ordinary pen oscillograph

Example of AM-modulated square wave

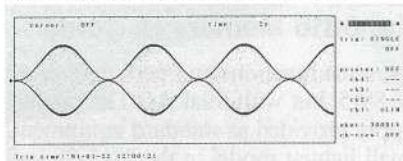

Dot display

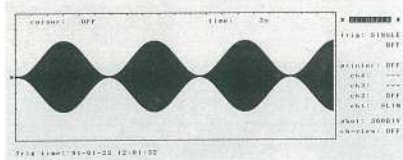


Line interpolation display

● High-speed, large-capacity memory recorder function and X-Y recorder function

Maximum sampling speed is 500kS/s (2μs cycle), assuring capture of even high-speed voltage changes. And with the big 125k Word memory, you can record up to the equivalent of 20 meters of chart paper. With multiple channels, X-Y synthesis is also possible.


The figure shows a printout of a part of the total amount of data in memory. The portion printed is specified by cursor.

Partial printing (8830 series)

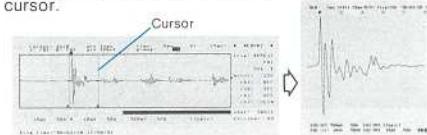

● Digital trigger with 1% steps

The digital trigger can be set accurately and precisely in 1% increments, and the trigger filter helps prevent accidental triggering by noise waveforms. The memory recorder function also captures waveforms before and after the trigger to see what's happening on either side of an abnormal phenomena.

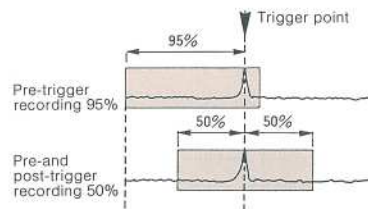

● Plug-in input units for user customization




With unitized input units users can choose the number of channels they need, and combine three types of input units for an enormous range of variation in a single measurement instrument.

● Waitless mode essentially eliminates missed waveforms


The waitless mode means that a trigger can be detected and the waveform captured even during print... a feat impossible with conventional systems.

No pre-trigger waiting time

● Normal recording



● Waitless mode



● Selection of computer interfaces

GP-IB and RS-232C interfaces are available as options, supporting data transfer between measurement system and host, and remote control of everything but mechanical switches.


● Uses both AC and DC power (8816-31-33 types)

Without switching the power supply, these models can handle inputs of AC10 to 30V and AC90 to 250V, making possible a wide range of application even mounting in automobiles !

8830 series functions

● Large-size liquid crystal display for observation

The 8830 series comes with a large LCD panel, making it easy to directly check system settings and observe the waveform. For waveform display the scroll function lets you move the waveform image just like you're reading a roll of chart paper. And because time axis scaling is unrestricted, you can easily search out the part of the waveform you want to examine in detail, and magnify it for a good look.

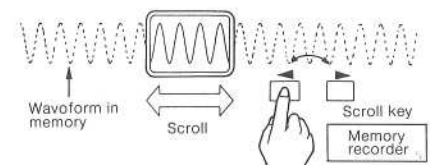


● Cursor measurement function

Move the cursors on the display to read waveform voltage, potential difference, time difference and frequency.

● Waveform judgment function to detect abnormal waveforms

For memory recording applications a reference area can be defined, and the system will automatically judge if the measured waveform is acceptable or not, with external output of the result. The perfect system for line troubleshooting. And you can automatically record abnormal waveforms.

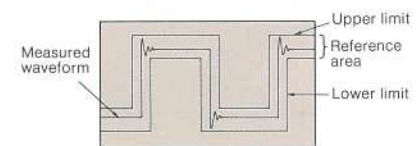

GO, NG Evaluation

- ◇ Evaluation modes
- 1 GO if the entire waveform is in the area
- 2 GO if at least some part of the waveform is in the area
- 3 GO if the entire waveform is outside the area
- 4 GO if at least some part of the waveform is outside the area
- ◇ Stop modes
- 1 NG stop
- 2 GO stop
- 3 GO and NG stop

● RAM card autosave and auto set-up functions


For memory recorder applications, data

captured each time measurement is triggered can be automatically saved to a RAM card. And RAM cards can also be used for automatic system set-up at power on, setting all system parameters to specified values.

8832·33 functions

● Conversion display of units and values, per-channel scaling

Physical units, coefficients for conversion between units and voltages, and offsets can be operated for scaling, making direct read-out of measurement results possible.

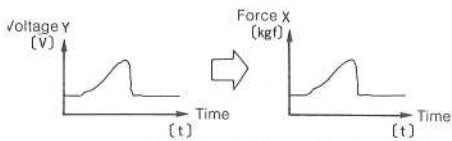

● User-defined comment print function for each input channel

Comments of up to 20 characters can be printed on chart paper (on the 8830·31 also), and comments of up to 10 characters for each channel. . . perfect for organizing your data and preparing reports.

● Channel marker function

Channel numbers can be printed on recording lines and all models offer two recording line thicknesses to make it even easier.


● Parameter and waveform backup

Not only set-up parameters, but also measured waveform data and waveform judgment areas are stored even if the power fails. Other models only offer backup of set-up parameters.

*** Set up ***		*** Trigger ***	
function	MEM	date	'90-10-26
time/DIV	100ms	time	10:48:30
shot line	200DIV	mode	SINGLE
dot-line	LINE	source	CH1
format	SINGLE	pre-trig	0%
read	X	level	60%
auto-prt	DN	slope	3
RAM card		filter	OFF
auto-save	OFF	wait-loss	OFF
wave-comp.	OFF		

*** System ***	
start backup	OFF
EL auto-off	DN
beep sound	DN
auto range	DN
auto list	DN
ch-marker	DN
grid kind	NORMAL

*** Channel condition ***									
prt	pos	fill	range	scaling	eu/v	offset			
CH1	SLP1	50%	OFF	100mV	OFF	A 2.50E+2	+0.00E+0		
CH2	SLP1	50%	OFF	100mV	OFF	V 1.00E+0	+0.00E+0		
CH3	SLP1	50%	OFF	100mV	OFF	V 1.00E+0	+0.00E+0		
CH4	SLP1	50%	OFF	100mV	OFF	V 1.00E+0	+0.00E+0		
CH5	SLP1	50%	OFF	200mV	OFF	V 1.00E+0	+0.00E+0		
CH6	SLP1	50%	OFF	200mV	OFF	V 1.00E+0	+0.00E+0		

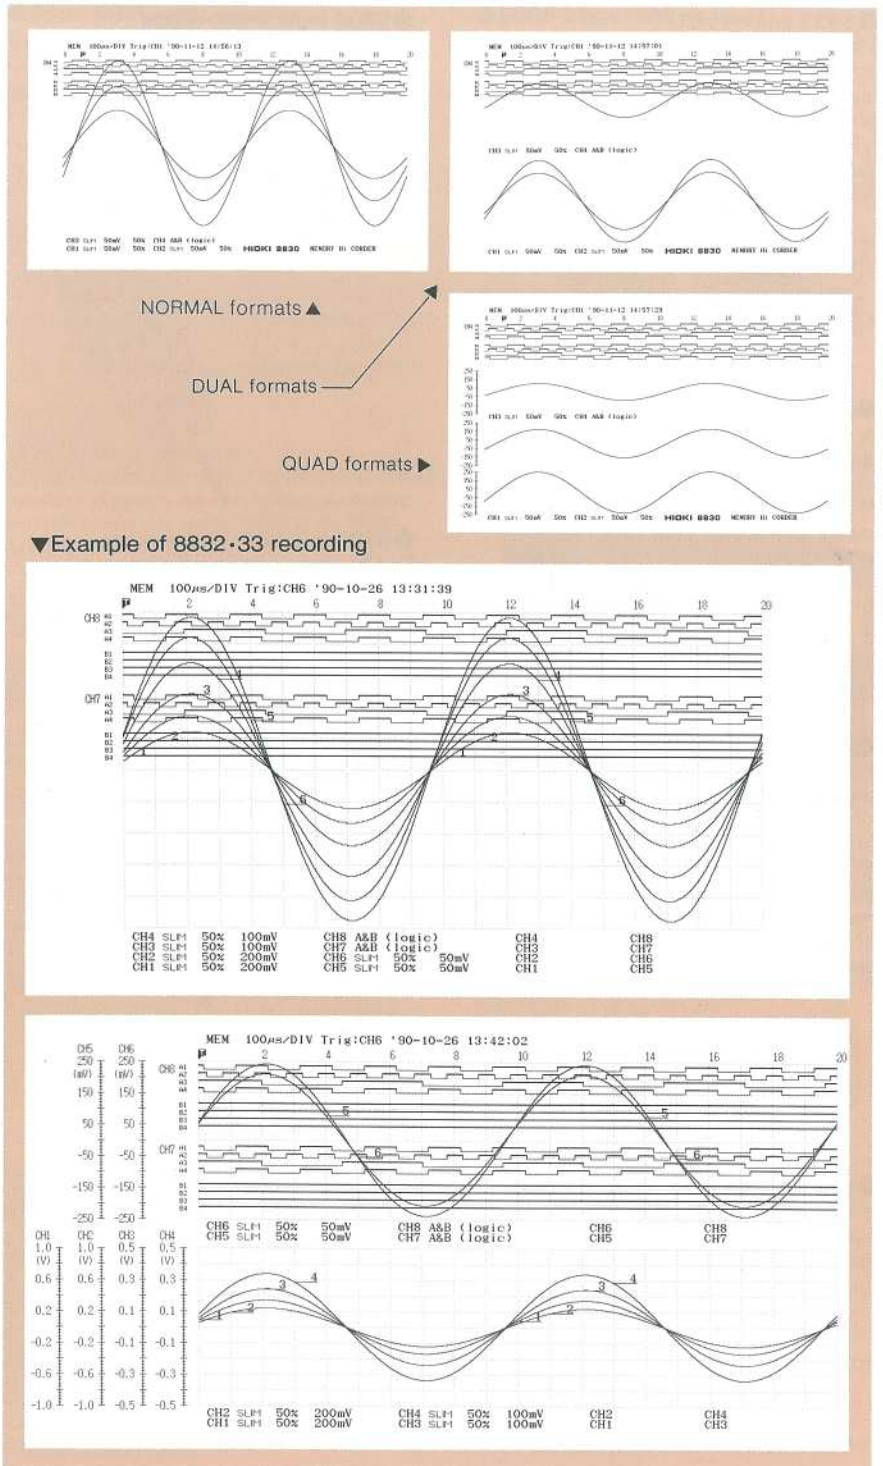

Easier to use than ever, with a rich array of applications.

●8932 analog unit

The standard analog unit that can be used for all types of measurement applications. Input resistance is maintained even when the power is turned off to prevent damage to the system being measured. And the wide frequency range from DC to 200kHz (-3dB) delivers a wide range of applications.



●8933 logic unit

A single unit can read in up to eight logic channels, with visual lever-operated set-up of trigger patterns. (Logic probes sold separately. 8832-33 have internal logic units, and cannot mount the 8933.)



●8934 analog unit (DC/RMS)

Equipped with two modes—DC and RMS—the 8934 not only provides direct recording of AC240V waveforms in DC mode, but offers the same wide frequency range as the 8932 for measurement of everything from power lines to inverter voltages. In the RMS mode voltage fluctuations can be recorded at the effective values, with high-speed RMS conversion.



●9508 blank panels

If all the input units are not mounted, blank panels are installed on the unused channels for safety.



●9306 logic probe usage

It can be used as a high/low detector when recording operation timing for electronic circuit digital signals, or as an on/off detector when recording no-voltage contact signal operation timing for relays and similar circuits. The digital signal is -COM only, and the threshold is fixed to +1.4V.



●9307 line logic probe usage

Can be used as an on/off detector when recording AC/DC high-voltage drive circuit operation timing, such as in elevator relay sequence control. The detection threshold is high, and the design is noise-resistant. Because on/off detection response is only a few msec, it can also be used as a power failure detector for commercial power lines.



●9308 line dip detector usage

Detects instantaneous voltage drops in AC100V-class (100V, 120V) commercial power lines, and triggers the recorder. At the same time a signal 1/100th of the measured voltage is output, allowing the waveform during voltage drop to be recorded.



●9303 PT usage

Used for level detection and isolation for measurement of AC400V power line and commercial power line voltages. Because it is designed for waveform recorder use, it features a wide frequency range.

●9270-9271-9272 clamp on sensor and 9555 sensor unit usage


Can monitor current waveforms on line lines up to AC20A or AC200A. Frequency range is extremely wide (5Hz to 50kHz/±2.5%), making possible recording of inverter-controlled current waveforms on the Memory Hi Corder.



9270-9271
Clamp on sensor

9555 Sensor unit

Example of inverter-controlled current and voltage recording

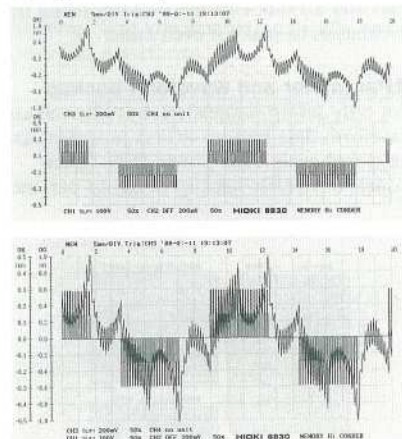


● 9527 RAM card



Used to store measured waveform data or recorder parameter settings. With the autosave function waveforms can be stored to the card instead of printing out on chart paper, and because card storage is faster there is less chance of missing a waveform. The auto set-up function lets novices merely insert the card to automatically set all parameters by just turning on the power.

● 9534 ROM card (FFT operation)

Time-axis waveforms recorded on a Memory Hi Corder can be converted to frequency axis for spectrum analysis. A mode is also provided for commercial power line (100V AC, 50/60Hz) harmonic analysis, with numeric and bar graph output of harmonic components up through the 49th.

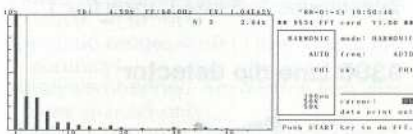


In addition to displaying bar graphs of harmonic component percentages, a data list can be printed to allow detailed examination of data.

Order	Amplitude (%)	Phase (deg)	Waveform
100	100.00	0.00	(Fundamental)
2	1.00	0.00	(2nd Harmonic)
3	0.33	0.00	(3rd Harmonic)
4	0.10	0.00	(4th Harmonic)
5	0.03	0.00	(5th Harmonic)
6	0.01	0.00	(6th Harmonic)
7	0.00	0.00	(7th Harmonic)
8	0.00	0.00	(8th Harmonic)
9	0.00	0.00	(9th Harmonic)
10	0.00	0.00	(10th Harmonic)
11	0.00	0.00	(11th Harmonic)
12	0.00	0.00	(12th Harmonic)
13	0.00	0.00	(13th Harmonic)
14	0.00	0.00	(14th Harmonic)
15	0.00	0.00	(15th Harmonic)
16	0.00	0.00	(16th Harmonic)
17	0.00	0.00	(17th Harmonic)
18	0.00	0.00	(18th Harmonic)
19	0.00	0.00	(19th Harmonic)
20	0.00	0.00	(20th Harmonic)
21	0.00	0.00	(21st Harmonic)
22	0.00	0.00	(22nd Harmonic)
23	0.00	0.00	(23rd Harmonic)
24	0.00	0.00	(24th Harmonic)
25	0.00	0.00	(25th Harmonic)
26	0.00	0.00	(26th Harmonic)
27	0.00	0.00	(27th Harmonic)
28	0.00	0.00	(28th Harmonic)
29	0.00	0.00	(29th Harmonic)
30	0.00	0.00	(30th Harmonic)
31	0.00	0.00	(31st Harmonic)
32	0.00	0.00	(32nd Harmonic)
33	0.00	0.00	(33rd Harmonic)
34	0.00	0.00	(34th Harmonic)
35	0.00	0.00	(35th Harmonic)
36	0.00	0.00	(36th Harmonic)
37	0.00	0.00	(37th Harmonic)
38	0.00	0.00	(38th Harmonic)
39	0.00	0.00	(39th Harmonic)
40	0.00	0.00	(40th Harmonic)
41	0.00	0.00	(41st Harmonic)
42	0.00	0.00	(42nd Harmonic)
43	0.00	0.00	(43rd Harmonic)
44	0.00	0.00	(44th Harmonic)
45	0.00	0.00	(45th Harmonic)
46	0.00	0.00	(46th Harmonic)
47	0.00	0.00	(47th Harmonic)
48	0.00	0.00	(48th Harmonic)
49	0.00	0.00	(49th Harmonic)

● 9535 ROM card (operations)


Waveforms recorded on the Memory Hi Corder can be operated on mathematically, and averages calculated.

▼ Calculated waveform (1st order differentiation)

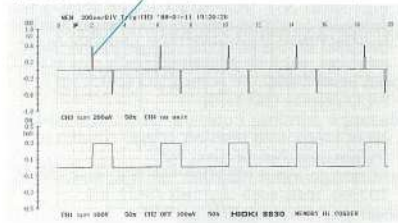

● 9506 GP-IB interface


Connection of a computer through the GP-IB interface supports data transfer and remote control operation (compatible with IEEE 488-1978).

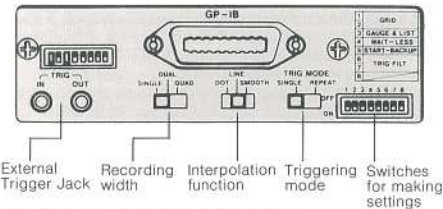

The Rear Panel (8815 with GP-IB)

● 9507 RS-232C interface

Most computers use the RS-232C external interface instead of GP-IB, although data transfer rates are lower. By connecting modems and recorders through RS-232C links, a telephone line can be used to access a remote computer. Hayes AT compatible modems can be connected directly.

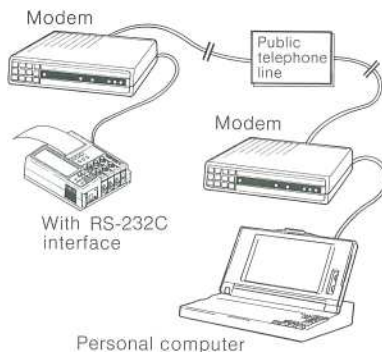

● 9305 trigger unit usage

Used to synchronize multiple Memory Hi Corders for simultaneous recording, by connecting their trigger I/O terminals.

● 9362·9366·9084 carrying cases

Resin attache cases to transport Memory Hi Corders in safely, along with all their accessories. The 9362 for 4-channel systems and the 9366 for 6-channel systems have the same exterior appearance. The 9084 PVC leather carrying case is designed especially for accessories.



▲ The photo shows an example of storage of the 8830.

9362·9366 carrying cases
Dimensions and weight:
Approx. 192H x 550W x 440D mm·4.4kg



9084 carrying case (especially for accessories)
Dimensions and weight:
Approx. 120H x 260W x 300D mm·750g

General Specifications

[Basic specifications]

Measurement functions: Recorder, Memory recorder, High-speed XY recorder, Continuous XY recorder
 Input system: Plug-in input units
 No. of input units: max. 4 units of analog or logic (8815, 16, 30, 31), max. 6 units of analog only, internal 2 units of logic (8832, 33)
 Max. sampling speed: 500kS/s (2 μ s sampling period)
 Memory capacity: 8bit \times 125kword/ch-30kword/ch (varies according to number of channels)
 External control terminals: 3.5mm-dia. minijacks trigger I/O terminals. Judgement output (NG)
 Temperature performance: Operating 5°C to 40°C
 Humidity: 35% to 80%R.H. non-condensing.
 Power requirement: 100/120/200/220/240VAC (specify at order) \pm 10% (max. 250VAC), 50/60Hz
 *90V to 250VAC or 10V to 30VDC (8816, 31, 33) AC-priority automatic selection.
 Power: 60W to 85W max. (approx. 20W to 33W during normal recording) See the selection guide.
 Dimensions and Weight: See the selection guide.
 Accessories: Power cord 1, Recording paper 1, Dust cover 1, and Spare fuse 1.
 * (DC power cord 1 for 8816, 31, 33)

[Recording section]

Recording method: Thermal printing with thermal line head.
 Recording paper: 110mm \times 30m roll type thermal recording paper.
 Recording width: (total) 104.2mm (624dots) (Waveform section) 83.8mm f.s.
 Scale: 1DIV=8.35mm (50dots)
 Printing speed: Approx. 1.2cm/s max.
 Display device: Blue mode LCD (640 \times 200 dots) with EL backlight. (*8830, 31, 32, 33 only)

[Trigger section]

Triggering method: Digital comparison.
 Modes: Single, Repeat, *Auto (8830, 31, 32, 33)
 Source: OFF, EXT, MANU, INT (One of all the input units)
 *TIMER (8832, 33)
 Slope: rise, fall (Analog inputs), condition match (Logic inputs), fall (EXT input)
 Level: set digitally from 0-100% (in 1% steps) 0V input or terminal short (Threshold 2.5V) (EXT trigger)
 Logic input conditions: 1, 0, or OFF pattern settings/8 AND or OR channels
 Pri-trigger: 5, 50, 95, -95% (8815, 16)
 0, 5, 25, 50, 75, 95, 100, -95% (8830, 31, 32, 33) (memory recorder, high-speed XY recorder)
 Timing: Start, stop (recorder, continuous XY recorder)
 *Timer: Settable the time of start, stop, and intervals. (8832, 33 only)
 Filter: OFF, 0.1, 0.2, 0.3, 0.6, 1.3, 2.6DIV (memory recorder, high-speed XY recorder) (Analog input of 8815, 16: OFF, 0.2, 0.6, 2.6DIV) OFF, ON (recorder)
 Output: Open collector (with 5V pull-up R) Pulse width approx. 1.5ms

Function Specifications

● Recorder function

Time axis: 1s/DIV to 50min/DIV; 1-2-5 steps, 12ranges
 Time axis resolution: 100dots/DIV (50dots/DIV at 1s/DIV only)
 Sampling period: Constant regardless of time axis.
 80 μ s to 120 μ s (8815, 16)
 160 μ s to 240 μ s (8830, 31)
 110 μ s to 200 μ s (8832, 33)
 Recording length: 20, 40, 80, 160, 300, 600DIV, or continuity.
 Printing format: Single, dual, or quad
 Recording line: Wide, slim, OFF/Interpolation (dot, line)
 Printing functions: Select between printer and LCD output.
 LCD screen copy (8830, 31, 32, 33)

● Memory recorder function

Time axis: 100 μ s/DIV to 5sec/DIV; 1-2-5 steps, 15ranges
 Time axis resolution: 50dots/DIV
 Sampling period: 1/50 of time axis 2 μ s to 0.1s
 Recording length: 20, 40, 80, 160, 300, 600DIV.
 1200DIV (max. number of CH 2; 8815, 16, 30, 31; 4; 8832, 33)
 2500DIV (max. number of CH 1; 8815, 16, 30, 31; 2; 8832, 33)

Printing format: Single, dual, or quad
 Recording line: Wide, slim, OFF/interpolation (dot, line)
 Printing functions: Auto, manual, partial
 *LCD screen copy (8830, 31, 32, 33)

● X-Y recorder functions

X channel: CH1 (only for analog input unit)
 Y channel: CH2 to 4 (8815, 16, 30, 31)
 CH2 to 6 (8832, 33)
 Effective recording area: 83.8mm \times 83.8mm (10DIV \times 10DIV)
 X/Y axis resolution: 25dots/DIV
 Sampling period: 2 μ s to 0.1s
 time base axis 1/50 (High-speed X-Y recorder)
 50 to 70 μ s (8815, 16, 30, 31, Continuous X-Y)
 60 to 100 μ s (8832, 33, Continuous X-Y recorder)
 Recording length: same as that of the memory recorder. (High-speed X-Y recorder) infinite time. (Continuous X-Y recorder)
 Recording line: Interpolation (dot, line)
 ON, OFF (8815, 16, 30, 31) Wide, slim, OFF (8832, 33)
 Superposed printing: possible (only Continuous X-Y recorder)

[Auxiliary function]

Waitless mode: ON, OFF (in memory rec. and high-speed X-Y rec.) No pre-trigger waiting time.
 In repeat or auto mode, the next trigger event is accepted during printing. (Not available in the μ s range and with recording length over 600DIV.)
 Input level meter: 16 point LED (8815, 16) LCD display (8832, 33)
 Message printing: Function, channel (s) used, input range, zero position, trigger conditions, trigger time, No. of divs., etc.
 *Message input function: 20 char. max. (8830, 31) 10 char. max. each channels (8832, 33)
 Chart grid: Normal, fine, or OFF
 Time axis automatic setting: Possible in memory recorder and high-speed X-Y recorder modes.
 Clock function: Automatic calendar, automatic leap year adjustment, 24-hour clock
 Clock accuracy: 100ppm @ 25°C (8815, 16, 30, 31) 50ppm @ 25°C (8832, 33)
 Backup battery life: Longer than 10 years for clock and settings. @ 25°C (8815, 16, 30, 31) Longer than 8 years for waveform data, clock and settings. @ 25°C (8832, 33)
 *Scaling function: Settable (8832, 33)
 Cursor measurement functions: Potential, Time elapsed from trigger, Time difference, Frequency, and potential difference. (8830, 31, 32, 33)
 Waveform judgment function: Supported for channel 1 analog waveform in memory recorder. (recording length 300DIV or less. 8830, 31) (recording length 600DIV or less. 8832, 33)
 Judgment method: GO/NG judgment based on upper/lower limits comparison.
 Judgment area setting: By designation of vertical and horizontal margins around reference waveform.
 Judgment modes:
 1-GO if the entire waveform is in the area.
 2-GO if at least some part of the waveform is in the area.
 3-GO if the entire waveform is outside the area.
 4-GO if at least some part of the waveform is outside the area.
 Stop mode: GO, NG, or GO and NG stop
 Judgment output: NG judgment result output
 Open collector with 5V output, active low, pulse width 20ms or more.
 Time required for judgment: Approx. 50ms (8830, 31) Approx. 30ms (8832, 33) (20DIV, waveform input time excluded).
 RAM card: External memory for set parameters, waveform data and judgment area data. Auto-save, Auto-setup function provided. (8830, 31, 32, 33)
 Applicable RAM cards: JEIDA standard, 68 pins, 64bytes to 4Mbytes.
 Interface: Either a GP-IB interface or an RS-232C interface
 Factory option to be specified when ordering.
 Supports waveform data read/write, input unit settings readout and main unit remote control.

Optional accessories specifications

9306 Logic probe



Channels	4 (Common ground)	
Input waveform	Digital input	Contact input
Input impedance	*50k Ω or more	2k Ω
Threshold level	+1.4V	+1.4V
Allowable input voltage	50V	30V
Response time	2 μ sec or less	

*100k Ω at input levels up to 5V
 50k Ω at input levels above 5V.

Dimensions: Approx. 137H \times 64W \times 22Dmm
 Weight: Approx. 200g
 Cord length: 1.5m
 Probe tip cable length: 20cm
 Accessories: Soft case 1, digital probe tip 4, contact probe tip 4

9307 Line logic probe



Channels	4 (floating)	
Input voltage range	Low	High
Input impedance	About 30k Ω	About 100k Ω
Detectable level (H)	60V to 150VAC \pm (20 to 150)VDC	170 to 250 V DC \pm (70 to 250)V DC
Non-detectable level (L)	0 to 10VAC \pm (0 to 15)V DC	0 to 30VAC \pm (0 to 43)V DC
Response time	1ms or less 3ms or less (at 100 V DC)	1ms or less 3ms or less (at 200 V DC)
Maximum floating voltage	250V	

*Since the absolute value is detected, DC input is bipolar input.

Dimensions: Approx. 137H \times 64W \times 22Dmm
 Weight: Approx. 400g
 Cord length: 1.5m
 Input cord length: 1m
 Accessories: Soft case 1, spare fuse 1

9308 Line dip detector



Channels	1
Input impedance	About 12k Ω
Input range	AC100V/AC120V
Voltage drop detection level	80% or 90% of the input range
Detection method	Peak detection
Response time	2 cycles of the input AC voltage
Maximum floating voltage	130VAC
ATT. section	100:1 \pm 3% DC to 100kHz (\pm 3 dB)

Dimensions: Approx. 137H \times 64W \times 22Dmm
 Weight: Approx. 300g
 Cord length: 1.5m
 Input code length: 1m
 Accessories: Soft case 1, spare fuse 1

9527, 9534, 9535 Common general specifications

Type: 68-pin, 2-piece connector JEIDA standard
 Dimensions: Approx. 85.6H \times 54W \times 3.3Dmm
 Temperature performance: Operating 5°C to 40°C
 Humidity: 35% to 80% R.H.(non-condensing)

9527 RAM card

Data memory capacity: 128kbytes
 Backup battery: lithium battery BR2325 (3V) \times 1
 Accessories: lithium battery 1, index seal 2

9534 ROM card (FFT Analysis)

●FFT specifications
 Number of calculation points: 128, 256, 512, or 1024 points
 Dynamic range: 48dB (Theoretical 8 bit accuracy)
 Frequency range: 195kHz to 3.90Hz
 Frequency resolution: 1/50, 1/100, 1/200, or 1/400 of frequency range.
 Window: Rectangular, Hanning
 Recording length limit: 20 to 300DIV
 Analysis starting position: Specified by A, B cursors
 Display functions: Linear spectrum, power spectrum, storage waveform
 Display format: Horizontal axis Linear/logarithmic display
 Vertical axis Linear [V]/linear [V²]/logarithmic [dB]
 Cursor display function: Time from starting position, and voltage value, frequency, voltage, power, or logarithm of maximum value.
 Printer output: LCD screen copy and outputs a list of data for all frequencies displayed.
 Calculation time: Approx. 1.3 to 10.4s (depending on number of calculation points)

●Harmonic calculation function specifications

Harmonic orders: 49 orders max.
 Waveforms analyzed: Waveforms collected by memory recorder. (100 μ s/DIV, 300DIV)
 Rated frequency range of fundamental wave: 40 to 70Hz
 Dynamic range: 48dB (Theoretical 8 bit accuracy)
 Analysis channel: Any analog unit channel (one channel only)
 Analysis content: Overall distortion (49 orders), percentage and phase of individual harmonic component. voltage and frequency of fundamental wave.
 Display format: Bar graph display of percentage of harmonic component for each order. Result of analysis value.
 Cursor readout: Order and component percentage of each harmonic.
 Printer output: LCD screen copy, or data list of analysis value.
 Calculation time: 6.8s

9535 ROM card (calculation)

Items and accuracy: 1st order differentiation, 1st order integration, moving averages, 4-function arithmetic, \pm 0.4% f.s. maximum, minimum, peak, RMS values, period, frequency, rise time, fall time, area, and X-Y area, \pm 1 dgt. transfer of waveform data between channels.
 *(accuracy refers to the amount of error inherent in calculation, and not to the accuracy of the signal itself.)

9303 PT



Transformation ratio: 40:1/20:1 \pm 1%
 Allowable input voltage: 440V/220VAC
 Frequency characteristics: 40Hz to 3kHz (\pm 1%)
 Insulation dielectric strength: 2kVAC/1 minute.
 Dimensions: Approx. 113H \times 56W \times 93Dmm
 Weight: Approx. 730g
 Cord length: 1m (input, output)
 Accessories: Input cord 1, output cord 1, spare fuse 1

9305 Trigger cord



Terminal: 3.5mm-dia. miniplug
 Cord length: Approx. 1.5m

9555 Sensor unit



Compatible sensor: 9270, 9271, 9272
 Output: 2V AC/20A(20A-range), 2VAC/200A (200A-range)
 Temperature performance: 0 to 40°C
 Humidity: 80%R.H. or less
 Power requirement: 85 to 250V AC (47 to 440Hz)
 Power: 5.5W max. (1.7W under no load)
 Dimensions: 100H \times 48W \times 180Dmm, 700g
 Accessories: 9177cord 1, power cord 1, spare fuse 1, rubber legs 4, rack mounting fittings 2



9270, 9271, 9272 Clamp on sensor

	9270	9271
Rated current	20A AC	200A AC
Accuracy (23 \pm 3°C) 45 to 66Hz	\pm 0.5% rdg. \pm 0.05% f.s. (amplitude) \pm 0.2° max. (phase)	
Frequency characteristics (vibration amplitude, phase deviation from the basic accuracy)	5Hz to 50kHz \pm 2.5%, \pm 1.0° max.	
Operating input range	0 to 50Arms	0 to 300Arms
Max. allowable input (continuous)	100Arms	500Arms
Max. circuit voltage	600V AC	
Measurable conductor diameter	20mm-dia.	
Dimensions-Weight	60H \times 145W \times 33Dmm • Approx. 230g	
9272		
Rated current	20A AC	200A AC
Accuracy (23 \pm 3°C) 45 to 66Hz	\pm 0.5% rdg. \pm 0.05% f.s. (amplitude) \pm 0.2° max. (phase)	
Frequency characteristics (vibration amplitude, phase deviation from the basic accuracy)	5Hz to 10kHz \pm 2.5%, \pm 2.0° max.	
Operating input range	0 to 60Arms (20A-range)	0 to 300Arms (200A-range)
Max. allowable input (continuous)	400Arms	
Max. circuit voltage	600V AC	
Measurable conductor diameter	46mm-dia. or 50 \times 20mm busbar	
Dimensions-Weight	174H \times 62W \times 33Dmm • Approx. 420g	

220H Recording paper winder



Winding paper width: 70 to 220mm
 Winding method: Intermittent winding
 Winding power: Approx. 500g-cm
 Power requirement: Using the exclusive adapter (6VDC out)
 Power: Approx. 7W
 Dimensions: Approx. 190H \times 240W \times 160Dmm
 Weight: Approx. 2.6kg
 Accessories: AC-adapter 1, paper guide pin 1 set

Other optional accessories

Option that can be installed at the factory. (specify at time of order) one only
 9506 GP-IB Interface
 9507 RS-232C Interface
 Option that can be installed at the factory or replaced by the user.
 8932 Analog unit
 8933 Logic unit
 8934 Analog unit
 9508 Blank panel
 9221 Recording paper (30m) 10pcs
 9151-01 GP-IB Cable (1m)
 9151-02 GP-IB Cable (2m)
 9151-04 GP-IB Cable (4m)

Sampling rates and recording times (Memory recorder function)

TIME/DIV	Sampling period	Recording time (maximum)		
		1ch ※1 2ch	2ch ※2 4ch	3, 4ch ※3 5-8ch
100 μs/DIV	2 μs	250ms	120ms	60ms
200	4	500	240	120
500	10	1.25s	600	300
1ms/DIV	20	2.50	1.20s	600
2	40	5.00	2.40	1.20s
5	100	12.5	6.00	3.00
10	200	25.0	12.0	6.00
20	400	50.0	24.0	12.0
50	1ms	125	60.0	30.0
100	2	250	120	60.0
200	4	500	240	120
500	10	1250	600	300
1s/DIV	20	2500	1200	600
2	40	5000	2400	1200
5	100	12500	6000	3000

Time axis resolution is 1/50 DIV

※1 Recording length is 2500 DIV.

The number of channel: 1 (8815, 16, 30, 31)

2 (8832, 33)

※2 Recording length is 1200 DIV.

The number of channel: 2 (8815, 16, 30, 31)

4 (8832, 33)




※3 Recording length is 600 DIV.

The number of channel: 3 or more (8815, 16, 30, 31)

5 or more (8832, 33)

8 logic channels of 8832 or 8833 correspond to 1 analog channel.

Input unit specifications (sold separately)

	8932 Analog unit	8934 Analog unit (DC/RMS)	8933 Logic unit
			
Number of input channels	1ch	1ch	8ch
Input method	Unbalanced input (input and output mutually insulated)	Balanced input (input and output mutually insulated)	Logic probe (4ch) × 2 use requires a logic probe (sold separately)
Measurement ranges	10, 20, 50, 100, 200, 500mV 1, 2, 5, 10, 20, 50V/DIV	2, 5, 10, 20, 50, 100V/DIV	9306, 9307, 9308
DC amplitude accuracy	±1% f.s.	±1% f.s.	—
RMS accuracy	—	±2% f.s. (DC, 40 to 1kHz) ±8% f.s. (1k to 100kHz) 10% to 200% of effective input range	—
Zero position adjustment	Settable to 11 locations from 0 to 100% (in 10% steps) of recording width, and fine adjustment.	Settable to 21 locations from 0 to ±100% (in 10% steps) of recording width, and fine adjustment.	—
Zero position accuracy	±1% f.s.	±1% f.s.	—
Frequency characteristics	DC to 200kHz (−3dB)	DC to 200kHz (−3dB)	—
RMS response time	—	rise 100ms typ. (0 to 90% f.s.) fall 200ms typ. (100 to 10% f.s.)	—
RMS crest factor	—	4 (less than rated input voltage)	—
Input R C, C=@100kHz	1MΩ ±1% (mV/DIV); approx. 30pF (V/DIV); approx. 25pF	Approx. 2MΩ / 2pF	—
Low-pass filter (response time)	Cutoff frequency approx. 5Hz, 500Hz, or OFF setting	Cutoff frequency approx. 5Hz, 500Hz, or OFF setting (100ms addition at 5Hz ON) (1ms addition at 500Hz ON)	—
A/D conversion resolution	8bit	8bit	—
Max sampling speed	500kS/s	500kS/s	500kS/s
Allowable input voltage	500V (DC+AC peak) Continuous	250VAC, 500VDC Continuous	—
※1 Max. floating voltage	250VAC, DC	250VAC, DC	250VAC, DC
Insulation resistance and dielectric strength	100MΩ min./500VDC, 1.5kVAC /1minute	100MΩ min./500VDC, 1.5kVAC /1minute	100MΩ min./500VDC, 1.5kVAC /1minute
※2 Common mode rejection ratio	80dB min.	80dB min.	—
Temperature characteristics (for both zero point and gain)	±0.1% f.s./°C	±0.1% f.s./°C	—
Dimensions	Approx. 34H × 124W × 82Dmm	(excluding protrusions)	—
Weight	Approx. 220g	Approx. 240g	Approx. 160g
Accessories	9177input cord (1.7m) 1, Fixing screws of input unit 2	9152 input cord (2m) 1, Fixing screws of input unit 2, spare fuse (0.5A) 2	Fixing screws of input unit 2

※1 (between input unit and case, and between input units)

※2 (source impedance 100Ω max. at 50 or 60Hz)

Note: If input units are not installed in all positions (4 channels with the 8815, 16, 30, 31 or 6 channels with the 8832, 33), safety considerations require installation of 9508 blank panels for all empty channels.

Selection guide and Ordering information

Item	8832	8833	8830	8831	8815	8816	
Functions	Recorder, memory recorder, high-speed X-Y recorder, continuous X-Y recorder						
Analog input unit (floating)	6ch (measurable simultaneously)		4ch	3ch	2ch	1ch	0ch
Logic input unit (floating)			0ch	8ch	16ch	24ch	32ch
Logic input ch. (non-floating)	16ch (internal)						
Max. sampling speed	500kS/s (sampling period 2 μ s)						
Memory capacity 8bit \times	125kword/ch	use 1 or 2ch		use 1ch			
	60kword/ch	use 3 or 4ch		use 2ch			
	30kword/ch	use 5ch or more		use 3ch or more			
External trigger I/O	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	
Wave judgment out	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	
Power AC ^{※1}	<input type="radio"/>	<input type="radio"/> (90 to 250V)	<input type="radio"/>	<input type="radio"/> (90 to 250V)	<input type="radio"/>	<input type="radio"/> (90 to 250V)	
Power DC	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	
Power (normal recording)	70W(26W)	85W(33W)	60W(23W)	80W(27W)	60W(20W)	80W(24W)	
Dimensions	342H \times 340W \times 105Dmm			274H \times 340W \times 105Dmm			
Weight (main unit only)	approx. 6kg	approx.5.5kg	approx. 5kg	approx. 4.8kg	approx. 4.5kg	approx. 4.4kg	
Recording paper	110mm \times 30m roll type thermal paper						
Waveform display	<input type="radio"/> (LCD)	<input type="radio"/> (LCD)	<input type="radio"/> (LCD)	<input type="radio"/> (LCD)	<input type="radio"/>	<input type="radio"/>	
Digital trigger	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	
Pri-trigger (8 steps)	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/> (4 steps)	<input type="radio"/>	
Trigger filter (7 steps)	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/> (4 steps with analog only)	<input type="radio"/>	
Timer trigger	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	
Settings backup	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	
Wave data backup	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	
Input level meter	<input type="radio"/> (LCD)	<input type="radio"/> (LCD)	<input type="radio"/>	<input type="radio"/>	<input type="radio"/> (LED)	<input type="radio"/> (LED)	
Channel marker	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	
Scalling function	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	
Message input (20 char.)	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	
Message input (10 char./CH)	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	
Condition printing	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	
Reverse LCD display scrolling (REC)	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	
Cursor measurement	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	
Accepts RAM/ROM cards	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	
^{※2} GP-IB/RS-232C	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	
Waveform judgment (Recording length)	<input type="radio"/>		<input type="radio"/>		<input type="radio"/>		
	600DIV		300DIV				
Judgment time (20DIV)	30ms		50ms				
8932/8934 analog unit	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	
8933 logic unit	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	

^{※1} 120, 200, 220, and 240V variations must be specified at time of order. AC/DC dual power supply types accept any voltage in range 90 to 250V.
^{※2} Specify option (one only) at time of order. More than one of these options cannot be installed.

In addition to the 8815-30 series, other Memory Hi Corders available from HIOKI include the 8850 Memory Hi Corder, which provides high-speed sampling at the rate of 20MS/s, and the 8821 Memory Hi Corder, which is a multi-channel type with 13 channels.

Please read before ordering

The 8815, 30 series Memory Hi Corder cannot be used by itself, but requires the 8932, 8934 analog unit and/or 8933 logic unit, which are sold separately.

If you wish to have input units installed at the factory, please specify so at the time of order. If input units are not installed in all positions, safety considerations require installation of blank panels in all empty channels. (Shipments with empty channels are not permitted.)

Other optional accessories

Refer to P.11 and P.12



HIOKI E.E. CORPORATION

DISTRIBUTED BY

HEAD OFFICE: 81 Koizumi, Ueda, Nagano, 386-11, Japan
FAX: 0268-28-0568 / TEL: 0268-28-0562
TLX: 3327508 HIOKI J / Cable: HEWLOV, Ueda