



ABN 43 064 478 842

➤ 231 osborne avenue clayton south, vic 3169
PO box 1548, clayton south, vic 3169
t 03 9265 7400 f 03 9558 0875
freecall 1800 680 680
www.tmgtestequipment.com.au

Test & Measurement

- sales
- rentals
- calibration
- repair
- disposal

Complimentary Reference Material

This PDF has been made available as a complimentary service for you to assist in evaluating this model for your testing requirements.

TMG offers a wide range of test equipment solutions, from renting short to long term, buying refurbished and purchasing new. Financing options, such as Financial Rental, and Leasing are also available on application.

TMG will assist if you are unsure whether this model will suit your requirements.

Call TMG if you need to organise repair and/or calibrate your unit.

If you click on the "Click-to-Call" logo below, you can call us for FREE!

TMG Corporate Website

TMG Products Website



Disclaimer:

All trademarks appearing within this PDF are trademarks of their respective owners.

Wireless

2945B Communications Service Monitor



A compact, lightweight and rugged instrument that allows laboratory standard measurements to be conducted in the field

- Rugged lightweight package
- Full span spectrum analyzer with 'live' look and listen
- Tracking generator with full offset tracking
- Accurate power measurement to 150 W
- 5 W protection on all RF ports as standard
- Color transfective superfast LCD with rapid refresh rate for easy monitoring and real time adjustment
- 50 kHz DSO (Digital Storage Oscilloscope) with anti-aliasing
- Transient and Harmonic analysis

The 2945B Communications Service Monitor is the lightest, most rugged service monitor available with a full performance spectrum analyzer as standard. For field work the 2945B provides an excellent combination of instruments for all types of maintenance work. In the workshop, it provides all of the performance you would expect for exacting measurements.

Field Operation

At under 12 kg (25 lb), the 2945B lightens the load to remote sites. The shape of the 2945B is ideal for carrying. The side handle ensures that the instrument is clear of the stairs when ascending buildings and the depth is suitable for the 2945B to be operated comfortably when it is placed on the floor.

A large color transfective (improved sunlight readable) display aids operation under harsh viewing conditions.

An optional bail arm is also available. This option allows a stowage cover to be fitted over the front panel for storage of adapters and further protection to the instrument's front panel. A selection of cases are available including a hard transit case, standard soft carrying case or an integrated soft carrying/optional case allowing full operation without removal from the protective case.

Internal Battery

Utilizing NiMH technology the internal battery option provides 60 minutes operation in the field.

Compact and light the 2945B is equally at home in the field as on a bench.

Fast Warm Up - Fast Results


The standard TCXO allows results to be made reliably within a minute of switch on. Where even better stability is required, an optional OCXO is available.

Stored settings may be recalled from internal memory or from a memory card, allowing fast and straightforward setting up.

Fast Full Performance Spectrum Analyzer - provided as standard

The spectrum analyzer provides spans from 100 Hz per division to

full span and also has a fully adjustable reference level. Speed is comparable with analog analyzers, allowing real time adjustments over the displayed dynamic range. With the tracking generator provided as standard, duplexers and filters can be aligned quickly and easily. An offset facility provides testing of equipment with frequency translation. Channel stepping can be performed by defining an increment and then using the FREQ $\uparrow\downarrow$ keys. This is particularly useful when testing multi-channel systems.

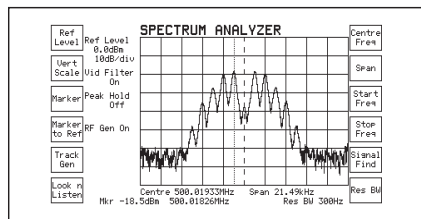

Live Look and Listen

This feature puts the 2945B above all its peers with the ability to examine signals on the screen and demodulate them simultaneously. Intermittent interference can be isolated quickly and the signals then easily identified. The trace can be saved to the memory card along with the time and date, providing factual evidence that can be recalled later. This feature is particularly useful when looking for rogue transmissions, especially on busy basestation sites.

From 2 μ V to 150 Watts

The 2945B will measure the power of low level signals such as those encountered when monitoring off-air signals or those found when probing a circuit. 150 Watts measurement is provided without the need for external attenuators, so high power base stations can be measured directly. Measurement accuracy of better than 10% is guaranteed all the way down to 5 mW on the N-Type connector, allowing radios to be qualified at low power levels.

Accurate RF Signals

The signal generator provides coverage from 400 kHz to 1.05 GHz with +5 dBm output (+7 dBm overrange) and fast switching speed. Level accuracy is ± 2 dB at all levels above -127 dBm.


Duplex - provided as standard

Full duplex operation is provided by the 2945B. This allows testing of duplex radios as well as simultaneous testing of repeater transmit and receive paths. There are no restrictions to the duplex offset.

PMR, Trunking and Cellular

The 2945 provides extensive support for the various tone signaling systems used in Professional Mobile Communications such as DTMF, TONE REMOTE (Option), DCS and CTCSS. Also a highly flexible user defined system enables the instrument to be configured to accommodate a wide variety of other tone formats that are in use.

Additionally trunked networks are supported with network signaling protocol simulations for MPT-1327/1343, LTR (available Oct 05) and EDACS radio / repeater measurements. Legacy analog cellular standards are also available internally and include AMPS, TACS and NMT with all country variants provided.

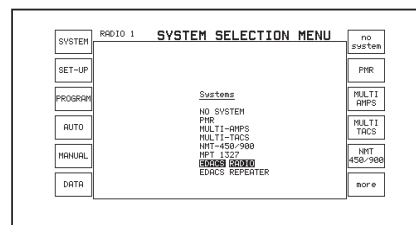

Remote Control - RS-232 or GPIB

Remote control is provided with an RS-232 interface as standard. An IEEE-488.2 interface (Option 5) can be fitted where other instruments are required to operate in a system with the 2945B.

Printing and Post Analysis

With the parallel printer port interface, screen dumps, automatic test results or previously stored results may be sent to any parallel printer. These facilities are available as standard using the serial RS-232 interface.

A screen capture facility is available so any screen displayed on the 2945B Communications Service Monitor can be saved direct to a PC, via the serial port, as a bit map file.


A single trace dump command allows fast transfer of the spectrum analyzer, OBW or transient analysis trace to be transferred as 249 ordinate values for detailed post-processing and analysis.

Autorun - internal control

With the (optional) Analog Systems Card fitted, automatic testing without an external controller is possible. Custom tests may be written and run by the operator. Four programmable relay contacts are provided with the optional parallel printer interface to allow remote control of radios or test fixtures from built-in automatic tests.

Custom Programs

Users may program the instrument to suit their own specific needs. This is possible either by configuring any of the range of built-in programs or by using the MI-BASIC interpreter to produce a customized test program that can be executed internally, without an external controller.

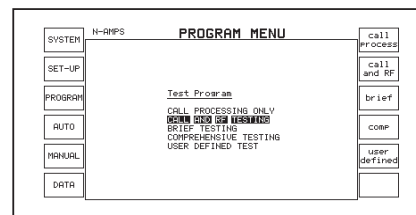

Memory Card - with real time clock

The Memory Card Drive meets the PCMCIA standard format for PC cards. The 2945B provides a DOS based filing system that allows transfer of information to a PC fitted with a memory card slot.

Test setups, test results, screen dumps, spectrum analyzer coordinates and test sequences can all be stored on the memory card, allowing information to be easily stored and retrieved when required.

Reliability

The 2945B features high integration with a rugged chassis design to maximize mechanical protection.

Audio Analysis

A comprehensive and expanded range of filter selection is provided as standard, including band pass, lowpass and high pass. Optional filters are available for psophometric weighting of audio signals and demodulation of signals in a simulated radio channel bandwidth.

The standard 1 kHz notch filter provides for normal distortion/SINAD measurements. Additional notch filters can be added to enable distortion/SINAD measurements for signals in the range 50 Hz to 20 kHz where required.

The direct measurement of CTCSS is possible with the 300 Hz LP filter, even with speech present.

Two comprehensive audio generators are provided as standard for internal modulation or audio sources for transmitter stimulus.


External DC coupled FM is provided.

Comprehensive Oscilloscope

Analysis of audio signals, whether from the demodulated signal or the audio input direct, can be viewed for further inspection. The oscilloscope can either be combined with the measurement screen in the Tx, Rx or AF test modes or 'zoomed' to a full screen display. Different levels of persistence can be selected to allow short or long term effects to be captured.

Transient Analysis

The ability to capture transients on the rising or falling edge of a waveform provides a valuable tool for fault finding radios and radio systems. The user has full control of the trigger level and input attenuation as well as the timebase and five fixed trigger points, making this feature simple and flexible to operate.

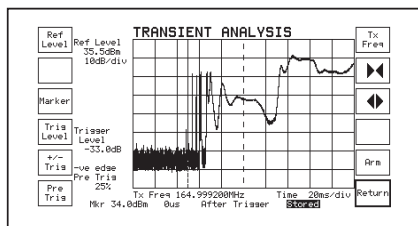

Harmonic Analysis

An automatic harmonic analysis function is included in the 2945B. This complements the fast spectrum analyzer and allows a rapid check that the transmitter is not producing any large harmonics.

Tones Generation and Decoding

The tones menus include full remote control so that radio workshops can further automate their tasks. It is possible to enter tones durations of up to 20 seconds directly, simplifying operation with some of the more extreme tones systems in use. These and other improvements are in response to user feedback and allow better control of the tones from the top level screens.

POCSAG Decode - built in option

Off-air decoding of POCSAG signals is provided as an option. This allows tone, numeric and alphanumeric signals to be displayed. Signals with bit rates of up to 4800 bits/s can be automatically detected making the 2945B an ideal surveillance tool. The 2945B can be set to detect all messages, a user selectable RIC (just like a Pager), or a fixed message string.

RF POCsag Decoder

Encode **150.0** **FREQ: 466.076000MHz** **Call: 0800000** **Clear Setup**

Decode forwarrt Rihwnumeric **Decode on: Rll** **Tx Freq**

Bit Rate: 1.2000KHz **Polar: RT** **RLC**

RLC: 0377168 **Decode Forwarrt**

Add/Alert Type: *** (11)** **Message Type: Text Message** **Decode On**

26 If poss call Bob in office **Return**

Errored Codewords: 0 **Corrected: 0**

SPECIFICATION

GENERAL INFORMATION

Certain characteristics are shown as typical. These provide additional information for applying the instrument, but are unwarranted.

RF SIGNAL GENERATOR

FREQUENCY

Frequency Range

400 kHz to 1.05 GHz

Resolution

10 Hz

Indication

10 digit display

Setting

Keyboard entry, delta increment/decrement function and rotary control

Accuracy

As frequency standard

OUTPUT LEVEL


Output Level Range

Rx Test:

N-Type socket: -141 dBm to -21 dBm

BNC socket: -115 dBm to +5 dBm

(overrange to +7 dBm)

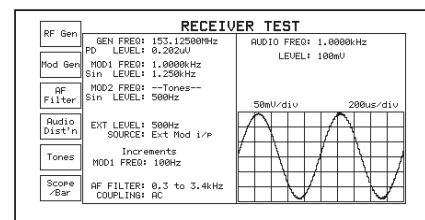

Resolution

0.1 dB

Indication

4 digits plus sign (dBm, dBμV, μV, mV PD/EMF)

Accuracy

±2 dB for levels above -127 dBm on N-Type socket up to 1 GHz

Atten Hold Facility (CW and FM modes only)

Allows user to define start point for seamless generator operation across a range of up to 20 dB (guaranteed 10 dB minimum)

Reverse Power Protection

N-Type: 50 W 10 minutes, normal operation

150 W for 1 minute at 20°C

Overload indicated by audible and visual warning

BNC: 5 W Overload indicated by audible and visual warning

Output Impedance

Nominally 50 Ω

VSWR

N-Type

Better than 1.2:1 up to 500 MHz

Better than 1.35:1 up to 1.05 GHz

BNC

Better than 2.2:1 up to 1.05 GHz

SPECTRAL PURITY

(If you require even better spectral purity than that specified here, please consider the 2948B)

Residual FM

Less than 15 Hz RMS (0.3 to 3.4 kHz) up to 500 MHz

Less than 20 Hz RMS (0.3 to 3.4 kHz) up to 1.0 GHz (with OCXO)

Harmonics

Better than -20 dBc

Spurious Signals

Better than -30 dBc (±10 kHz to 1.5 MHz offset from carrier frequency or over range 600 to 700 MHz)

Better than -40 dBc from 400 kHz to 1 GHz

SSB Phase Noise (20 kHz offset)

Better than -95 dBc/Hz up to 1 GHz

RF Carrier Leakage

Less than 0.5 μV PD generated in a 50 Ω load by a 2 turn loop 25 mm from the case. Output level less than -40 dBm into a sealed 50 Ω load.

AMPLITUDE MODULATION - INTERNAL

Frequency Range

400 kHz to 1.05 GHz

AM Depth Range

0 to 99%

Resolution

1%

Indication

2 digits

Setting

Keyboard entry, delta increment / decrement function and rotary control

Accuracy

For carrier frequencies from 1.5 MHz to 400 MHz

± 7% ± 1 digit for modulation frequency of 1 kHz

± 10% ± 1 digit for modulation frequencies from 50 Hz to 5 kHz

± 15% ± 1 digit for modulation frequencies from 50 Hz to 15 kHz

Distortion

Less than 2% at 1 kHz for 30% AM, CCITT weighted

Modulation Frequency

5 Hz to 33 kHz

AMPLITUDE MODULATION - EXTERNAL

Input Impedance

Nominally 10 kΩ in parallel with 40 pF

Frequency Range

As internal AM

Modulation Frequency Range

As internal AM

Sensitivity

1 V RMS for 0 to 100% AM

FREQUENCY MODULATION - INTERNAL

Frequency Range

400 kHz to 1.05 GHz

Maximum Deviation

0 to 75 kHz

Indication

3 digits

Setting

Keyboard entry, delta increment/decrement function and rotary control

Accuracy⁽²⁾

±5% ± 10 Hz at 1 kHz modulating frequency

±10% at modulating frequencies from 50 Hz to 15 kHz

Distortion

Less than 1% at 1 kHz for deviation of 5 kHz, CCITT weighted

Modulation Frequency Range

5 Hz to 33 kHz

Resolution

25 Hz

Pre-emphasis

750 μs selectable

FREQUENCY MODULATION - EXTERNAL

Input Impedance

Nominally 10 kΩ in parallel with 40 pF

Frequency Range

As internal FM

Modulation Frequency Range

DC to 100 kHz

Pre-emphasis

750 μ s selectable

Sensitivity

1 Volt RMS for 0 to 75 kHz deviation

MICROPHONE INPUT

Input Level

2 mV to 200 mV (AGC levelled)

Input Impedance

Nominally 150 Ω

Press To Talk (PTT)

When using the optional microphone in Tx Test mode, the PTT will switch instrument to Rx Test.

AUDIO VOLTMETER

Input Impedance

Nominally 1 M Ω in parallel with 40 pF

Frequency Range

DC and 50 Hz to 50 kHz
AC only 50 Hz to 50 kHz
Polarized DC (below 1 Hz)

Maximum Input Voltage

30 VRMS, 50 Vdc

Level Ranges

0 to 100 mV to 0 to 100 V RMS in a 1, 3, 10 sequence.
Digital readout also in mW, dBm, dBV, dBr (user selectable)
External load R selectable compensation for 4, 8, 16, 75, 100, 150, 300, 600 Ohms

Peak hold facility

Resolution

1 mV or 1% of reading

Indication

3 digits and bar chart

Accuracy

$\pm 3\%$ ± 3 mV ± 1 digit

AUDIO FREQUENCY METER

Frequency Range

20 Hz to 20 kHz

Resolution

0.1 Hz, less than 10 kHz
1 Hz, at 10 kHz and above

Indication

5 digits

Accuracy

As frequency standard ± 1 digit \pm resolution

Sensitivity

50 mV

AUDIO SINAD METER

Frequency

1 kHz (additional frequencies available with option 29)

Range

0 to 18 dB and 0 to 50 dB

Resolution

0.1 dB

Indication

3 digits and bar charts

Accuracy

± 1 dB

Sensitivity

50 mV (100 mV for 40 dB SINAD) reading suppressed if audio voltage is less than 5 mV

AUDIO DISTORTION METER

Frequency

1 kHz (additional frequencies available with option 29)

Range

0 to 10%, 0 to 30% and 0 to 100%

Resolution

0.1% distortion

Indication

3 digits and bar charts

Accuracy

$\pm 5\%$ of reading $\pm 0.5\%$ distortion

Sensitivity

50 mV (100 mV for 1% distortion) reading suppressed if audio voltage is less than 5 mV

AUDIO S/N METER

Range

0 to 30 dB and 0 to 100 dB

Resolution

0.1 dB

Indication

3 digits and bar chart

Accuracy

± 1 dB

Sensitivity

50 mV (100 mV for 40 dB S/N) reading suppressed if audio voltage is less than 5 mV

AUDIO OSCILLOSCOPE

Operating Modes

Single with digital storage on screen or repetitive sweep

Frequency Range

DC to 50 kHz, 3 Hz to 50 kHz AC coupled

Voltage Range

10 mV to 20 V per division in a 1, 2, 5 sequence

Voltage Accuracy

±5% of full scale

FM Ranges

±75, 30, 15, 6, 3 and 1.5 kHz deviation full scale, ±10% accuracy

AM Ranges

20, 10 and 5% per division, ±10% accuracy

Timebase

50 µs/div to 5 s/div in a 1, 2, 5 sequence

Graticule

10 Horizontal by 6 Vertical divisions

Special Features

Built in anti-aliasing circuitry and variable decode trigger level

AUDIO BAR CHARTS

Bar Chart Displays

AF Voltage, SINAD, Distortion, S/N

Vertical Resolution

2% of full scale

Ranging

Auto-ranging, range hold or manual selection

1, 2, 5, sequence with hysteresis

Audio and Modulation Filters

Lowpass filters

Four independently configurable Lowpass filters LP1, LP2, LP3, LP4 that can be set to any frequency cut off point from 250 Hz to 20000 Hz

(excluding the band 1001 Hz to 2999 Hz)

50 kHz Lowpass (No filters applied)

750 µs de-emphasis

Highpass filters

50 Hz Highpass, 300 Hz Highpass

Bandpass filters

Any combination of LP1, LP2, LP3, LP4 and the Highpass filters

Audio Analyzer General Features

Tones Mode

RF FREQUENCY METER

Frequency Range

100 kHz to 1.05 GHz (manual tune)

10 MHz to 1 GHz (auto-tune)

Resolution

1 Hz or 10 Hz, up to 1050 MHz, selectable

0.1 Hz, 1 Hz or 10 Hz up to 999 MHz, selectable

Indication

Up to 10 digits

Accuracy

As frequency standard ± resolution

Acquisition Time

Less than 1 second (manual tune)

Typically 3 seconds (auto-tune)

Sensitivity

Auto-tuned: 5 mW (N-Type)

0.05 mW (Antenna port)

Manual Tuned: -34 dBm (N-Type)

-60 dBm (Antenna port)

Auto or manual control of input attenuator

VSWR

N-Type: Better than 1.2:1 up to 500 MHz

Better than 1.25:1 up to 1.05 GHz

BNC: Better than 3:1 up to 1.05 GHz

RF POWER METER (BROADBAND)

Frequency Range

200 kHz to 1.05 GHz

Dynamic Range

5 mW to 150 W (N-Type)

0.05 mW to 250 mW (Antenna port)

Indication Units

Watts, dBm or dBW

Indication

3 digits or bar chart

Resolution

0.1 dB max, typically 1%

Accuracy (N-Type)

±10% ± resolution up to 1 GHz (FM & CW)

Maximum Continuous Rating


N-Type: 50 W at 20°C

Antenna port: 1 W

Intermittent Rating

N-Type: 150 W for limited periods, typically 1 minute at 20°C.

Overload indicated by audible and visual warning.

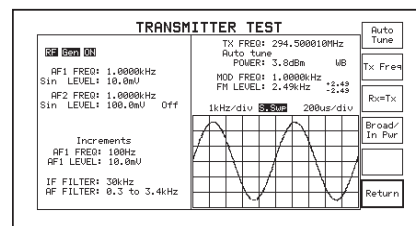

HARMONIC AND TRANSIENT ANALYSIS

HARMONIC MEASUREMENT

Displays 1st to 5th harmonic of the selected carrier

Maximum Harmonic Frequency

1.05 GHz

Dynamic Range

0 to -60 dBc

TRANSIENT POWER ANALYSIS

Displays power profile against time

Frequency Range

1 to 1050 MHz

Dynamic Range

60 dB below spectrum analyzer reference level

Scale (power)

10 dB/div

Scale (time)

50 μ s/division to 5 s/div

Trigger Level

Adjustable over full dynamic range +ve or -ve trigger selection

Pre-trigger

0, 25, 50, 75 or 100% of displayed period

MODULATION METER

Sensitivity

Auto-tuned: 5 mW (N-Type)

0.05 mW (Antenna port)

Manual Tuned: -34 dBm (N-Type)

-60 dBm (Antenna port)

Auto or manual control of input attenuator

Audio & Modulation Filters

Lowpass filters

Four independently configurable Lowpass filters LP1, LP2, LP3, LP4 that can be set to any frequency cut off point from 250 Hz to 20000 Hz (excluding the band 1001 Hz to 2999 Hz)

A 50 kHz Lowpass (No filters applied)

750 μ s de-emphasis

Highpass filters

50 Hz Highpass, 300 Hz Highpass

Bandpass filters

Any combination of LP1, LP2, LP3, LP4 and the Highpass filters

AMPLITUDE MODULATION

Frequency Range

100 kHz to 1.05 GHz

Modulation Frequency Range

10 Hz to 15 kHz

AM Depth Range

0 to 99% (manually tuned)

0 to 90% below 100 MHz

0 to 80% from 100 to 400 MHz

Peak hold facility

Resolution

1% AM

Indication

2 digits and bar chart

Accuracy ^(a)

$\pm 5\%$ ± 1 digit at 1 kHz

$\pm 8.5\%$ ± 1 digit from 50 Hz to 10 kHz

Demodulation Distortion ^(a)

Less than 2%, at 1 kHz and 30% AM, (CCITT weighted)

Residual AM

Less than 1% (300 Hz to 3.4 kHz)

FREQUENCY MODULATION

Frequency Range

100 kHz to 1.05 GHz

Modulation Frequency Range

10 Hz to 15 kHz

Deviation Range

0 to 75 kHz

Peak hold facility

Resolution

10 Hz below 2 kHz deviation, 1% above 2 kHz deviation

Indication

3 digits and bar chart

Accuracy ^(a)

$\pm 5\%$ ± 1 digit at 1 kHz modulation frequency

$\pm 7.5\%$ ± 1 digit for modulation frequencies 50 Hz to 10 kHz

Demodulation Distortion

Less than 2% at 1 kHz and 5 kHz FM, (CCITT weighted)

Residual FM

Less than 30 Hz (300 Hz to 3.4 kHz)

Demodulation Output Socket

200 mV peak to peak $\pm 10\%$ per 1 kHz deviation

RF SPECTRUM ANALYZER

Frequency Range

100 kHz to 1.0 GHz

Spans

1 kHz/division to 100 MHz/division in a 1, 2, 5 sequence or continuously variable

Start - stop facility allows selection of infinitely variable span width

Resolution Bandwidth

300 Hz, 3, 30, 300 kHz, 3 MHz

Reference Level (top of screen)

-50 dBm to +52 dBm

0.7 mV to 71 V

Displayed Dynamic Range

80 dB

Noise Floor

Typically 75 dB below top of screen

On Screen Linearity

Typically ± 2 dB ± 1 resolution (10 dB/div) >10 dB above noise floor

Vertical Resolution

0.1 dB on 2 dB/division
0.5 dB on 10 dB/division

Level Flatness

± 1 dB \pm resolution over 50 MHz span

Intermodulation Distortion

Better than 70 dB for two signals at -30 dBm into first mixer

Sweep Speeds

10 ms/div to 200 ms/div in a 1, 2, 5 sequence (optimum sweep speed and bandwidth selected according to span or user selectable)

Span	Resolution Bandwidth	Update (Sweeps/sec)
10 kHz	300 Hz	5
100 kHz	3 kHz	9
1 MHz	30 kHz	9
10 MHz	300 kHz	9
100 MHz	300 kHz	5
1000 MHz	3 MHz	5

Marker Indication

Level and frequency or delta marker from center line of screen. Single marker for frequency and level display. Marker to center frequency. Δ marker

Features

Simultaneous 'Look and Listen' spans 100 kHz, 200 kHz, 500 kHz, 1 MHz

Sensitivity

2 μ V

Tracking Generator Offset/Frequency Range

0 to 999 MHz/400 kHz to 1000 MHz

AUDIO GENERATORS

FREQUENCY

Frequency Range

5 Hz to 33 kHz (sine or square)

Setting

Keyboard entry, delta increment / decrement function and rotary control

Indication

5 digits

Resolution

0.1 Hz below 3.25 kHz
1 Hz above 3.25 kHz

Accuracy

0.01 Hz below 180 Hz, 0.1 Hz above 180 Hz

LEVEL

Level Range

0.1 mV to 4V RMS

Setting

Keyboard entry, delta increment / decrement function and rotary control

Indication

4 digits

Resolution

0.1 mV below 409 mV
1 mV above 409 mV

Accuracy

$\pm 5\%$ + resolution 50 Hz to 15 kHz

Output Impedance

Nominally 5 Ω (minimum load 25 Ω)

Distortion

Less than 0.5% at 1 kHz
Less than 1% from 50 Hz to 15 kHz

Signaling Encoder / Decoder

Sequential tones functions including revert
User defined tones
Encodes and decodes up to 40 tones
CCIR, ZVEI, DZVEI, EEA, EIA or user defined
Any of the tones may be extended
Continuous, burst and single step modes available
Up to two frequency plans may be defined and stored within the 2945B for sequential tones
Any of the standard tone frequency plans may be copied to user defined and modified
Tone length 20 ms to 20 s
Standard tone frequencies may be selected from a menu
Generation and decoding of DTMF tones
Generation and decoding of DCS (Digitally Coded Squelch)
Generation of POCSAG code CCIR No.1 Rec 584
Bit rates from 400 to 4800 bit/s. Inversion available

AUDIO MONITOR

Demodulated signals and audio signals may be monitored via the internal loudspeaker and the accessory socket output on the front panel.

CELLULAR AND TRUNKING

Test Modes

Auto test/manual test

Auto Test Programs (dependant upon which system in use)

Call processing only
Call and RF testing
Brief testing
Comprehensive testing

Parametric Auto Test Routines

AF Frequency	AF Level
FM Deviation	Mod frequency
Rx Distortion	Rx Expansion
Rx Sensitivity	Rx SINAD
Rx S/N	Tx Compression
Tx Distortion	Tx Frequency
Tx Level	Tx Power Level
Tx Limiting	Tx Mod Level
Tx Noise	Tx SINAD
Tx S/N	

Signaling Auto Test Routines

Registration/Roaming Update	PTT On
Place Call	PTT Off
Page Mobile	SAT Deviation

Clear from Land	SAT Frequency Clear from Mobile
Handoff	ST Duration
Hook Flash	ST Frequency
DTMF Decode	ST Deviation
Data Performance	DSAT Deviation

FREQUENCY STANDARD

Internal Frequency Standard (TCXO)

Frequency

10 MHz

Temperature Stability

0.5 ppm, 0 to 40°C

0.6 ppm 0 to 50°C

Ageing Rate

Better than 1 ppm per year

Warm Up

1 minute to specified accuracy

External Frequency Standard Input

Frequency

1, 2, 5 and 10 MHz

Input Level

Greater than 1 V peak to peak

Input Impedance

Nominally 1 kΩ

GENERAL

Keyboard and Display

Logical color coded keyboard with color high resolution fast LCD

Display Size

144 x 80 mm

RS-232C

RS-232C interface is provided for printing and remote instrument control

Connector

9 way female 'D' Type

POWER REQUIREMENTS

AC Supply Voltage

100 - 240 V~ / 108 - 118 V~ (Limit 90 - 264 V~ / 98 - 132 V~)

AC Supply Frequency

50 - 60 Hz / 50 - 400 Hz (Limit 45 - 66 Hz / 45 - 440 Hz)

Maximum AC Power

190 VA

DC Supply Voltage

11 to 32 V

Maximum DC Power

100 W

CALIBRATION INTERVAL

2 years

ELECTROMAGNETIC COMPATIBILITY

Conforms with the protection requirements of the EEC Council Directive 89/336/EEC. Complies with the limits specified in the following standards:

IEC/EN61326-1 : 2006, RF Emission Class B, Immunity Table 3

SAFETY

Conforms with the requirements of EEC Council Directive 73/23/EEC (as amended) and the product safety standard IEC / EN 61010-1 : 2001 + C1 : 2002 + C2 : 2003 for Class 1 portable equipment, for use in a Pollution Degree 2 environment. The instrument is designed to be operated from an Installation Category 2 supply.

ENVIRONMENTAL

Rated Range of Use

0 to 50°C and up to 95% relative humidity at 40°C

Storage and Transport

Temperature

-30°C to +70°C

Altitude

Up to 2500 m (pressurized freight at 27 kPa differential)

DIMENSIONS AND WEIGHT

Standard Dimensions

185 mm (7.3 in) height, 400 mm (15.7 in) width, 460 mm (18.1 in) deep (including handle, feet and covers)

Option 30 Dimensions

185 mm (7.3 in) height, 420 mm (16.5 in) width, 565 mm (22.2 in) deep (including handle, feet and covers)

Weight

Typically less than 11.4 kg, (<25 lb)

10.5 kg (No options) Less than 13 kg (fully equipped)

OPTIONS AND ACCESSORIES

600 Ω MATCHING UNIT (OPTION 1)

INPUT CIRCUIT

Impedance

600 Ω

Return Loss

>21 dB at 1 kHz

Frequency Response

±0.5 dB at 200 Hz to 5 kHz,

±2 dB at 100 Hz to 20 kHz

Accuracy of 1:1 Input:Output Ratio

±1% at 1 kHz ± accuracy of 2945B or 2948B

Maximum Input

5 V RMS maximum at 200 Hz to 5 kHz

3 V RMS maximum at 100 Hz to 20 kHz

OUTPUT CIRCUIT

Impedance

600 Ω

Return Loss

>21 dB at 1 kHz

Frequency Response

± 0.5 dB at 200 Hz to 5 kHz

± 2 dB at 100 Hz to 20 kHz

Level Accuracy

$\pm 2\%$ at 1 kHz \pm accuracy of 2945B or 2948B

Output Level

1 mV to 2.5 V RMS across 600 Ω

ANALOG SYSTEMS CARD (OPTION 2)

This option provides automatic testing for cellular, trunked and FM radios and a BASIC Interpreter for customized tests

HIGH STABILITY INTERNAL FREQUENCY (OCXO) STANDARD (OPTION 3)

Frequency

10 MHz

Temperature Stability

Better than 0.05 ppm, 5 to 55°C

Ageing Rate

Better than 0.1 ppm, per year, after 1 month continuous use

Warm-up Time

Less than 10 minutes to within 0.2 ppm at 20°C

PARALLEL INTERFACE (OPTION 4)

Allows direct connection of a parallel printer

Additionally provides four software programmable output lines

Printer Port

Connector

25 way female D type

Printers Supported

75, 100, 150 dots per inch laser printers, FX 80, FX 100 Epson format

Accessory Port

Connector

9 way female D type

Outputs

4 independently programmable output lines, each one configurable as a logic line or as a relay contact closure. +5 V supply available

GPIB (OPTION 5)

Capability

For printing, remote instrument control or for programming of user defined test sequences.

Complies with the following subsets defined

IEEE-488:- SH1, AH1, T6, L4, SR1, RL1, DT0, EI, DC1

MEMORY CARD DRIVE AND REAL TIME CLOCK (OPTION 6)

The memory card facility allows the storage of results, set-ups screen

dumps and user programs with SRAM cards. Meets PCMCIA 2 standard. Allows the current date and time to be stored with results to the memory card and/or printed with a screen dump.

SSB DEMODULATOR (OPTION 8)

The SSB demodulator allows signals to be demodulated either via the internal loudspeaker or via the accessory socket. Provides demodulation of SSB signals (upper and lower sideband).

Frequency Range

400 kHz to 1 GHz

AF Demodulation Range

10 Hz to 15 kHz

Distortion

Typically less than 3% at 1 kHz (300 to 3.4 kHz)

Detection Range

2 μ V to 150 W

Features

Automatic detection of USB or LSB. BFO can be used for tuning of carrier for AM and FM radios.

OCCUPIED BANDWIDTH MEASUREMENT (OPTION 9)

Calculates the bandwidth of a signal displayed on the spectrum analyzer.

Frequency Range

1 MHz to 1 GHz

Display Resolution

3 digits

Accuracy

20%

Bandwidth Measurement Range

3 kHz minimum

Ratio range 90% - 99% selectable in 0.1% steps

NMT CELLULAR SOFTWARE (OPTION 10)

NMT 450	NMT 900
Benelux	NMTF
Austria	Spain
Malaysia	Indonesia
Saudi 1	Saudi 2
Thailand	Oman
Tunisia	Hungary
Poland	Russia
Czech	Bulgaria
Slovenia	Turkey
USER DEFINED NMT	

AMPS CELLULAR SOFTWARE (OPTION 11)

USER DEFINED AMPS

TACS CELLULAR SOFTWARE (OPTION 12)

E-TACS	TACS 2
C-TACS I	C-TACS II
J-TACS	N-TACS
USER DEFINED TACS	

MPT 1327 TRUNKING SOFTWARE (OPTION 13)

BAND III	JRC
UK WATER	HONG KONG
AUTONET	AMT

MADEIRA NL-TRAXIS
 NZ MPT1327 PH-INDO
 USER DEFINED MPT

PMRTEST SOFTWARE (OPTION 14)

USER DEFINED PMR for FM radios

EDACS™ RADIO TEST SOFTWARE (OPTION 15)

Provides Auto/Manual test capability for EDACS™ radios. Up to 4 user defined variants can be created and stored, each with up to 24 spot channel frequencies.

Performs bit error rate tests to check performance of receiver and transmitter.

EDACS™ REPEATER TEST SOFTWARE (OPTION 16)

Provides Auto/Manual test capability for EDACS™ repeaters. Up to four user defined variants can be created and stored, each with up to 24 spot channel frequencies. A data logging facility is also available to continuously decode and display data messages from the repeater under test.

EDACS is an Ericsson GE registered trademark.

LTR TRUNKING TEST SOFTWARE (OPTION 18)

Provides Auto/Manual test capability for LTR Trunked radios. (Planned availability Q3 2006)

DEMODULATION FILTERS (OPTION 21)

Provides a range of high selectivity channel filters in Spectrum Analyzer Look and Listen mode. Shape factor approximates to ETSI requirements.

Bandwidths

5 kHz, 12.5 kHz, 25 kHz, 50 kHz and 300 kHz

POCSAG DECODE (OPTION 22)

Allows off-air decoding of POCSAG messages. Can decode a message as it is received, or decoding can be triggered from a user selectable RIC code or fixed message pattern.

Bit Rate

Automatically decodes any standard bit rate up to 4800 bits/s. Numeric or alphanumeric decoding is provided.

Number of received errors is displayed.

CCITT FILTER (OPTION 23)

Allows a CCITT filter to be inserted into either the demodulated audio path or the audio input path.

CMESS FILTER (OPTION 24)

Allows a CMESS filter to be inserted into either the demodulated audio path or the audio input path.

TONE REMOTE (OPTION 26)

Provides configuration screens and generation of Tone Remote control signals.

PLUS 2 DISTORTION NOTCH FILTERS BOARD (OPTION 29)

The standard instrument is supplied with a 1 kHz notch for Distortion and Sinad measurements. This option allows the user to carry out Distortion/Sinad measurements at two additional frequencies. The two additional notch frequencies can be anywhere in the band 50 Hz to 20 kHz and must be stipulated at the time of ordering.

BAIL ARM/FRONT COVER (OPTION 30)

Provides a bail arm carrying handle and front panel cover and storage area. The bail arm will also provide additional viewing angles when mounted on a bench.

IF OUTPUT (OPTION 31)

Allows access to the IF signal from the rear of the instrument (Note:- Incorporation of this option replaces the standard demod out capability)

INTERNAL BATTERY (OPTION 32)

Type

12 V NiMH

Capacity

Typically 60 minutes operation

Weight

1.8 kg

Charge Time From Instrument

4 hours

Temperature Range

5-35 C charge

0-50 C discharge

Notes

⁽¹⁾ At low modulation levels the residual AM/FM may become significant.

VERSIONS AND ACCESSORIES

When ordering please quote full ordering number information

Ordering Numbers

Versions

2945B

Communications Service Monitor

2948B

Low Phase-Noise Communications Service Monitor

Options

Option 1

600 Ω Matching Unit

Option 2

Analog Systems Card*

Option 3

High Stability OCXO

Option 4

Parallel Interface †

Option 5

GPIB Interface †

Option 6

Memory Card Drive with real time clock

Option 8

SSB Demodulator

Option 9

Occupied Bandwidth Measurement

Note : Option 2 required when ordering any of the following options 10 to 18

Option 10

NMT Cellular

Option 11

AMPS Cellular

Option 12

TACS Cellular

Option 13

MPT 1327 trunking

Option 14

PMRTEST

Option 15

EDACSTM Radio Test

Option 16

EDACSTM Repeater Test

Option 18

LTR Trunking

Option 21	Demodulation Filters*	54431/023	20 dB AF Attenuator (BNC)
Option 22	POCSAG Decode	46884/728	Rack Mounting Kit
Option 23	CCITT Filter ††	54421/001	BNC Telescopic Antenna
Option 24	CMESS Filter ††	46884/650	Serial port to PC control cable (9 way)
Option 26	Tone Remote	46884/649	Serial port to PC control cable (25 way)
Option 29	Plus 2 Distortion Notch Filters board**	46884/648	RS-232 Printer cable (25 way)
Option 30	Bail Arm and Front Panel Stowage cover	59999/170	RF Directional Bridge
Option 31	IF Output Capability	54421/002	(1 to 50 MHz) RF Directional Power Head
Option 32	Internal Battery*	54421/003	(25 to 1000 MHz) RF Directional Power Head
Supplied Accessories		46880/114	Service Manual

AC Supply lead

DC Supply lead

CD-Rom Containing Operating Manual

Optional Accessories

44991/145	Microphone with PTT
59000/189	Memory Card (128 k)
59000/375	Memory Card (2 M)
46662/779	Soft carrying case (suitable for all 294x, except early units being used with external battery)
46662/571	Soft carrying/operational case
46662/616	Soft carrying/operational case for use with option 30
54112/163	Hard Transit Case

† Options 4 and 5 cannot be fitted together.

†† Options 23 and 24 cannot be fitted together.

* Option 2, Option 21 and Option 32 :- Any two of these options can be fitted together, but not all three.

** Option 29, The standard instrument is supplied with a 1 kHz notch for Distortion and Sinad measurements. This option allows the user to carry out Distortion/Sinad measurements at two additional frequencies. The two additional notch frequencies can be anywhere in the band 50 Hz to 20 kHz and must be stipulated at the time of ordering.

‡ External Battery Packs for previous models are still available using the following order codes 2945A Battery pack 43113/021 or 2945 Battery pack 43113/018.

CHINA Beijing

Tel: [+86] (10) 6539 1166
Fax: [+86] (10) 6539 1778

CHINA Shanghai

Tel: [+86] (21) 5109 5128
Fax: [+86] (21) 5150 6112

FINLAND

Tel: [+358] (9) 2709 5541
Fax: [+358] (9) 804 2441

FRANCE

Tel: [+33] 1 60 79 96 00
Fax: [+33] 1 60 77 69 22

GERMANY

Tel: [+49] 8131 2926-0
Fax: [+49] 8131 2926-130

HONG KONG

Tel: [+852] 2832 7988
Fax: [+852] 2834 5364

INDIA

Tel: [+91] (0) 80 4115 4501
Fax: [+91] (0) 80 4115 4502

JAPAN

Tel: [+81] 3 3500 5591
Fax: [+81] 3 3500 5592

KOREA

Tel: [+82] (2) 3424 2719
Fax: [+82] (2) 3424 8620

SCANDINAVIA

Tel: [+45] 9614 0045
Fax: [+45] 9614 0047

SPAIN

Tel: [+34] (91) 640 11 34
Fax: [+34] (91) 640 06 40

UK Cambridge

Tel: [+44] (0) 1763 262277
Fax: [+44] (0) 1763 285353

UK Stevenage

Tel: [+44] (0) 1438 742200
Fax: [+44] (0) 1438 727601
Freephone: 0800 282388

USA

Tel: [+1] (316) 522 4981
Fax: [+1] (316) 522 1360
Toll Free: 800 835 2352

As we are always seeking to improve our products, the information in this document gives only a general indication of the product capacity, performance and suitability, none of which shall form part of any contract. We reserve the right to make design changes without notice. All trademarks are acknowledged. Parent company Aeroflex, Inc. ©Aeroflex 2009.

www.aeroflex.com
info-test@eroflex.com



Our passion for performance is defined by three attributes represented by these three icons: solution-minded, performance-driven and customer-focused.