



ABN 43 064 478 842

➤ 231 Osborne Avenue Clayton South, VIC 3169
 PO Box 1548, Clayton South, VIC 3169
 t 03 9265 7400 f 03 9558 0875
 freecall 1800 680 680
www.tmgtestequipment.com.au

Test & Measurement

- sales
- rentals
- calibration
- repair
- disposal

Complimentary Reference Material

This PDF has been made available as a complimentary service for you to assist in evaluating this model for your testing requirements.

TMG offers a wide range of test equipment solutions, from renting short to long term, buying refurbished and purchasing new. Financing options, such as Financial Rental, and Leasing are also available on application.

TMG will assist if you are unsure whether this model will suit your requirements.

Call TMG if you need to organise repair and/or calibrate your unit.

If you click on the “Click-to-Call” logo below, you can call us for FREE!

TMG Corporate Website

TMG Products Website



Click-to-Call
TMG Now



Product Lifecycle Management System

Disclaimer:

All trademarks appearing within this PDF are trademarks of their respective owners.



R&S® FSH4/8

Spectrum Analyzer

Specifications



75 Years of
Driving
Innovation



CONTENTS

Specifications	3
Frequency	3
Sweep time	3
Bandwidths	4
Level	4
Trigger functions	5
Inputs and outputs	6
Vector network analysis	7
(model .24/.28 with R&S®FSH-K42 option)	7
Scalar network analysis	8
(model .24/.28 without R&S®FSH-K42 option)	8
R&S®FSH-K41 distance-to-fault analysis.....	9
General data	9
Accessories.....	11
R&S®FSH-Z1 and R&S®FSH-Z18 power sensors.....	11
R&S®FSH-Z14 directional power sensor.....	11
R&S®FSH-Z44 directional power sensor.....	13
Ordering information	14
Options.....	15
Accessories.....	15

Specifications

Specifications apply under the following conditions:

15 minutes warm-up time at ambient temperature, specified environmental conditions met, calibration cycle adhered to.

Data without tolerances: typical values only. Data designated as 'nominal' applies to design parameters and is not tested. Data without tolerance limits is not binding.

Frequency

Frequency range	R&S®FSH4 model .04, model .14	9 kHz to 3.6 GHz
	R&S®FSH8 model .08, model .18	9 kHz to 8 GHz
	R&S®FSH4 model .24	100 kHz to 3.6 GHz
	R&S®FSH8 model .28	100 kHz to 8 GHz
Frequency resolution		1 Hz

Reference frequency, internal		
Aging per year		1×10^{-6}
Temperature drift	0 °C to +30 °C	1×10^{-6}
	+30 °C to +50 °C	3×10^{-6}
Achievable initial calibration accuracy		5×10^{-7}
Total reference uncertainty	0 °C to +30 °C	(time since last adjustment × aging rate) + temperature drift + calibration accuracy

Frequency readout		
Marker resolution		0.1 Hz
Uncertainty		$\pm(\text{marker frequency} \times \text{reference uncertainty} + 10\% \times \text{resolution bandwidth} + \frac{1}{2}(\text{span} / (\text{sweep points} - 1)) + 1 \text{ Hz})$
Number of sweep (trace) points		631
Marker tuning frequency step size		span/630
Frequency counter resolution		0.1 Hz
Count uncertainty	S/N > 25 dB	$\pm(\text{frequency} \times \text{reference uncertainty} + \frac{1}{2}(\text{last digit}))$
Frequency span		0 Hz, 10 Hz to 3.6 GHz / 8 GHz
Span uncertainty		nominal 1 %

Spectral purity SSB phase noise		
Carrier offset	30 kHz	f = 500 MHz <-95 dBc (1 Hz), typ. -105 dBc (1 Hz)
	100 kHz	<-100 dBc (1 Hz), typ. -110 dBc (1 Hz)
	1 MHz	<-120 dBc (1 Hz), typ. -127 dBc (1 Hz)

Sweep time

Sweep time	span = 0 Hz	200 μs to 100 s
	10 Hz ≤ span ≤ 600 MHz	20 ms to 1000 s
	span > 600 MHz	20 ms × span / 600 MHz to 1000 s
Uncertainty	span = 0 Hz	nominal 1 %
	span ≥ 10 Hz	nominal 3 %

Bandwidths

Resolution bandwidths		
Range	-3 dB bandwidth	100 Hz to 3 MHz in 1,3 sequence
Bandwidth accuracy	100 Hz ≤ RBW ≤ 300 kHz	nominal <5 %
	RBW > 300 kHz	nominal <10 %
Selectivity 60 dB / 3 dB		nominal <5 (Gaussian type filters)
Video filters		
Range	-3 dB bandwidth	10 Hz to 3 MHz in 1,3 sequence

Level

Display range		displayed noise floor to +30 dBm
Maximum rated input level with RF attenuation ≥ 10 dB		
DC voltage	model .04, .08, .14, .18	80 V
	model .24, .28	50 V
CW RF power		30 dBm (= 1 W)
Peak RF power	duration < 3 s	33 dBm (= 2 W)
Max. pulse voltage		150 V
Max. pulse energy	pulse width 10 μs	10 mWs
Maximum rated input level with RF attenuation < 10 dB		
DC voltage		50 V
CW RF power		20 dBm (= 100 mW)
Peak RF power	duration < 3 s	23 dBm (= 200 mW)
Max. pulse voltage		50 V
Max. pulse energy	pulse width 10 μs	1 mWs
Intermodulation		
Third-order intercept (TOI), nominal values	intermodulation-free dynamic range, signal level 2 x -20 dBm, RF attenuation = 0 dB, RF preamplifier = OFF	
	$f_{in} < 300 \text{ MHz}$	>54 dBc (TOI >+7 dBm, typ. +11 dBm)
	$300 \text{ MHz} \leq f_{in} < 3.6 \text{ GHz}$	>60 dBc (TOI >+10 dBm, typ. +15 dBm)
	$3.6 \text{ GHz} \leq f_{in} \leq 8 \text{ GHz}$	>46 dBc (TOI >+3 dBm, typ. +10 dBm)
	intermodulation-free dynamic range, signal level 2 x -40 dBm, RF attenuation = 0 dB, RF preamplifier = ON	
	$f_{in} < 300 \text{ MHz}$	>50 dBc (TOI -15 dBm)
$300 \text{ MHz} \leq f_{in} \leq 8 \text{ GHz}$	>56 dBc (TOI -12 dBm)	
Second harmonic intercept point, nominal values	RF attenuation = 0 dB, RF preamplifier = OFF	
	$f_{in} = 20 \text{ MHz to } 1.5 \text{ GHz}$	+40 dBm
	$f_{in} = 1.5 \text{ GHz to } 3 \text{ GHz}$	+30 dBm
	$f_{in} = 3 \text{ GHz to } 4 \text{ GHz}$	+20 dBm
	RF attenuation 0 dB, RF preamplifier = ON	
	$f_{in} = 100 \text{ MHz to } 4 \text{ GHz}$	0 dBm
Displayed average noise level		
0 dB RF attenuation, termination 50 Ω, RBW = 100 Hz, VBW = 10 Hz, sample detector, log scaling, tracking generator OFF, normalized to 1 Hz frequency		
		preamplifier = OFF
9 kHz to 100 kHz (models .04/.14/.08/.18 only)		<-108 dBm, typ. -118 dBm
100 kHz to 1 MHz		<-115 dBm, typ. -125 dBm
1 MHz to 10 MHz		<-136 dBm, typ. -144 dBm
10 MHz to 2 GHz		<-141 dBm, typ. -146 dBm
2 GHz to 3.6 GHz		<-138 dBm, typ. -143 dBm
3.6 GHz to 5 GHz		<-142 dBm, typ. -146 dBm
5 GHz to 6.5 GHz		<-140 dBm, typ. -144 dBm
6.5 GHz to 8 GHz		<-136 dBm, typ. -141 dBm
		preamplifier = ON
100 kHz to 1 MHz		<-133 dBm, typ. -143 dBm
1 MHz to 10 MHz		<-157 dBm, typ. -161 dBm
10 MHz to 1 GHz		<-161 dBm, typ. -165 dBm
1 GHz to 2 GHz		<-159 dBm, typ. -163 dBm
2 GHz to 5 GHz		<-155 dBm, typ. -159 dBm
5 GHz to 6.5 GHz		<-151 dBm, typ. -155 dBm
6.5 GHz to 8 GHz		<-147 dBm, typ. -150 dBm

Immunity to interference, nominal values		
Image frequencies	$f_{in} - 2 \times 21.4$ MHz	<-70 dBc, typ. -80 dBc
	$f_{in} - 2 \times 831.4$ MHz	<-70 dBc, typ. -90 dBc
	$f_{in} - 2 \times 4881$ MHz	-60 dBc
Intermediate frequencies	21.4 MHz, 831.4 MHz, 4881.4 MHz	<-60 dBc, typ. -80 dBc
	8931.4 MHz	-50 dBc
Spurious response, inherent	input matched with 50 Ω , without input signal, RBW \leq 30 kHz, RF attenuation = 0 dB, tracking generator OFF	<-90 dBm
Other interfering signals, signal level – RF attenuation < -20 dBm	$f \leq 3.6$ GHz spurious at $f_{in} - 2440.7$ MHz	<-60 dBc
	3.6 GHz < $f \leq 8$ GHz spurious at $f_{in} - 4465.7$ MHz	<-60 dBc
Spurious response, related to local oscillators	$f \leq 3.6$ GHz	
	$\Delta f < 300$ kHz	-60 dBc
	$\Delta f \geq 300$ kHz	<-60 dBc
	$f > 3.6$ GHz	
	$\Delta f < 300$ kHz	-54 dBc
	$\Delta f \geq 300$ kHz	<-54 dBc
	$f =$ receive frequency	
Level display		
Logarithmic level axis		1 dB, 2 dB, 5 dB, 10 dB, 20 dB, 50 dB or 100 dB, 10 divisions
Linear level axis		0 % to 100 %, 10 divisions
Number of traces		2
Trace detectors		max peak, min peak, auto peak, sample, RMS
Trace functions		clear/write, max hold, min hold, average, view
Setting range of reference level		-80 dBm to +30 dBm
Units of level axis		dBm, dBmV, dB μ V, V, W
Level measurement uncertainty		
Total measurement uncertainty	95 % confidence level, +20 °C to +30 °C, S/N > 16 dB, 0 dB to -50 dB below reference level, RF attenuation auto	
	10 MHz $\leq f \leq 3.6$ GHz	<1 dB, typ. 0.5 dB
	3.6 GHz < $f \leq 8$ GHz	<1.5 dB, typ. 1 dB
Absolute level uncertainty at 100 MHz	+20 °C to +30 °C	<0.3 dB
Frequency response (+20 °C to +30 °C)	9 kHz $\leq f < 100$ kHz (models .04/.14/.08/.18 only)	nominal <1.5 dB
	100 kHz $\leq f < 10$ MHz	nominal <1.5 dB
	10 MHz $\leq f \leq 3.6$ GHz	<1 dB
	3.6 GHz < $f \leq 8$ GHz	<1.5 dB
Attenuator uncertainty		<0.3 dB
Uncertainty of reference level setting		nominal <0.1 dB
Display nonlinearity		
Logarithmic level display	S/N > 16 dB 0 dB to -50 dB	<0.2 dB
Bandwidth switching uncertainty	reference: RBW = 10 kHz	nominal <0.1 dB

Trigger functions

Trigger		
Trigger source		free run, video, external, IF power
External trigger level threshold	low \rightarrow high transition	2.4 V
	high \rightarrow low transition	0.7 V

Inputs and outputs

RF input		
Impedance		50 Ω
Connector		N female
VSWR	100 kHz \leq f \leq 1 GHz	nominal <1.5
	1 GHz < f \leq 6 GHz	nominal <2
	6 GHz < f \leq 8 GHz	nominal <3
Input attenuator	RF input only	0 dB to 40 dB in 5 dB steps
AF output		
AF demodulation types		AM and FM
Connector		3.5 mm mini jack
Output impedance		nominal 32 Ω
Voltage (open circuit)		V _{rms} adjustable from 0 mV to >100 mV
Power sensor		
Connector		7-contact female (type Binder 712)
Power sensors supported		see accessories
Tracking generator (models .14 and .24 only)		
Frequency range		100 kHz to 3.6 GHz
Connector		N female, 50 Ω
VSWR	100 kHz \leq f \leq 1 GHz	nominal <1.5
	1 GHz < f \leq 3.6 GHz	nominal <2
Output level	tracking generator attenuation = 0 dB	nominal 0 dBm
Tracking generator attenuator		0 dB to 40 dB in 1 dB steps
Dynamic range for isolation measurements	RF attenuation = 0 dB, tracking generator attenuation = 10 dB, RBW = 1 kHz	
	100 kHz \leq f < 300 kHz	>60 dB, typ. 80 dB
	300 kHz \leq f < 3.6 GHz	>70 dB, typ. 90 dB
Reverse power		
DC voltage		50 V
CW RF power		+20 dBm (= 0.1 W)
Max. pulse voltage		50 V
Max. pulse energy (10 μ s)		1 mWs
Tracking generator (models .18 and .28 only)		
Frequency range		100 kHz to 8 GHz
Connector		N female, 50 Ω
VSWR	100 kHz \leq f \leq 1 GHz	nominal <1.5
	1 GHz < f \leq 6 GHz	nominal <2
	6 GHz < f \leq 8 GHz	nominal <3
Output level	tracking generator attenuation = 0 dB	nominal 0 dBm
Tracking generator attenuator		0 dB to 40 dB in 1 dB steps
Dynamic range for isolation measurements	RF attenuation = 0 dB, tracking generator attenuation = 10 dB, RBW = 1 kHz	
	100 kHz \leq f < 300 kHz	>60 dB, typ. 80 dB
	300 kHz \leq f < 6 GHz	>70 dB, typ. 90 dB
	6 GHz \leq f < 8 GHz	typ. >50 dB
Reverse power		
DC voltage		50 V
CW RF power		+20 dBm (= 0.1 W)
Max. pulse voltage		50 V
Max. pulse energy (10 μ s)		1 mWs
External reference, external trigger, DC bias port 2 (BNC 1)		
Connector		BNC, 50 Ω
Mode	selectable	ext. reference, ext. trigger, DC bias port 2
External reference	required level	0 dBm
	frequency	10 MHz
External trigger threshold	low \rightarrow high transition	2.4 V
	high \rightarrow low transition	0.7 V
DC bias port 2	max. rated input voltage	50 V
	max. rated input current	600 mA
IF out, DC bias port 1 (BNC 2)		
Connector		BNC, 50 Ω
Mode	selectable	IF out, DC bias port 1
IF out	frequency	21.4 MHz
DC bias port 1	max. rated input voltage	50 V
AUX		
Connector		7-contact female (type Binder 712)

Vector network analysis


(model .24/.28 with R&S®FSH-K42 option)

Frequency range	R&S®FSH4 model .24	300 kHz to 3.6 GHz
	R&S®FSH8 model .28	300 kHz to 8 GHz
Frequency resolution		1 Hz
Data points		631
Port power	controlled via tracking generator attenuation	nominal 0 dBm to -50 dBm in 1 dB steps
Reflection measurement		
Return loss		
Range	selectable	1 dB, 2 dB, 5 dB, 10 dB, 20 dB, 50 dB, 100 dB, linear 100 %
Resolution		0.01 dB
One-port phase		
Range	selectable	90°, 180°, 360°, 720°, 1000° to 10000° in 1, 2, 5 steps
Resolution		0.01°
VSWR		
Range	selectable	1 to 1.1, 1.5, 2, 6, 11, 21 or 71
Smith chart		
Range		1, zoom × 2, × 4, × 8
Reflection coefficient	range	0 to 1, 0 to 0.1, 0 to 0.01, 0 to 0.001
mRho	range	0 to 1000, 0 to 100, 0 to 10, 0 to 1
Corrected directivity	300 kHz ≤ f ≤ 3 GHz	nominal >43 dB
	3 GHz < f ≤ 6 GHz	nominal >37 dB
	6 GHz < f ≤ 8 GHz	nominal >31 dB
Corrected test port match	300 kHz ≤ f ≤ 3 GHz	nominal >40 dB
	3 GHz < f ≤ 6 GHz	nominal >37 dB
	6 GHz < f ≤ 8 GHz	nominal >30 dB
Transmission measurement		
Gain		
Measurement range		-120 dB to +80 dB
Display range	selectable	1 dB, 2 dB, 5 dB, 10 dB, 20 dB, 50 dB, 100 dB, linear 100 %
Resolution		0.01 dB
Phase		
Range	selectable	90°, 180°, 360°, 720°, 1000° to 10000° in 1, 2, 5 steps
Resolution		0.01°
Dynamic range from port 1 to port 2	RF attenuation = 0 dB, tracking generator attenuation = 10 dB, RBW = 1 kHz	
	100 kHz ≤ f < 300 kHz	typ. 70 dB
	300 kHz ≤ f < 6 GHz	>70 dB, typ. 90 dB
	6 GHz ≤ f < 8 GHz	typ. >50 dB
Dynamic range from port 2 to port 1	RF attenuation = 0 dB, tracking generator attenuation = 10 dB, RBW = 1 kHz	
	100 kHz ≤ f < 300 kHz	typ. 80 dB
	300 kHz ≤ f < 6 GHz	>80 dB, typ. 100 dB
	6 GHz ≤ f < 8 GHz	typ. >60 dB
Test port match		as specified for tracking generator output/RF input


Scalar network analysis

(model .24/.28 without R&S®FSH-K42 option)

Frequency range	R&S®FSH4 model .24 R&S®FSH8 model .28	300 kHz to 3.6 GHz 300 kHz to 8 GHz
Frequency resolution		1 Hz
Data points		631
Port power	controlled via tracking generator attenuation	nominal 0 dBm to -50 dBm in 1 dB steps
Reflection measurement		
Return loss	range	1 dB, 2 dB, 5 dB, 10 dB, 20 dB, 50 dB, 100 dB, linear 100 %
	resolution	0.01 dB
VSWR	range	1 to 2, 6, 11, 21 or 71, selectable
Corrected directivity (20° to 30°)	300 kHz ≤ f ≤ 6 GHz	nominal >25 dB
	6 GHz < f ≤ 8 GHz	nominal >20 dB
Corrected test port match (20° to 30°)	300 kHz ≤ f ≤ 6 GHz	nominal >20 dB
	6 GHz < f ≤ 8 GHz	nominal >15 dB
Transmission measurement		
Dynamic range from port 1 to port 2	RF attenuation = 0 dB, tracking generator attenuation = 0 dB, RBW = 1 kHz	
	300 kHz ≤ f < 6 GHz	>60 dB, typ. 80 dB
	6 GHz ≤ f < 8 GHz	typ. >40 dB
Dynamic range from port 2 to port 1	RF attenuation = 0 dB, tracking generator attenuation = 0 dB, RBW = 1 kHz	
	300 kHz ≤ f < 6 GHz	>70 dB, typ. 90 dB
	6 GHz ≤ f < 8 GHz	typ. >50 dB
Test port match		as specified for tracking generator output/RF input

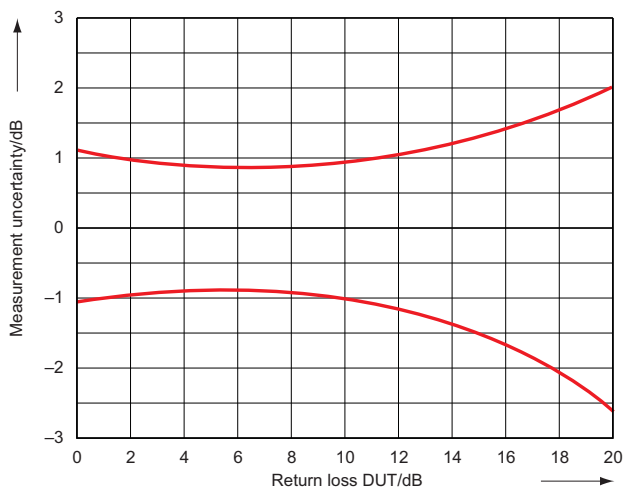

Uncertainty of reflection measurement without R&S®FSH-K42 option

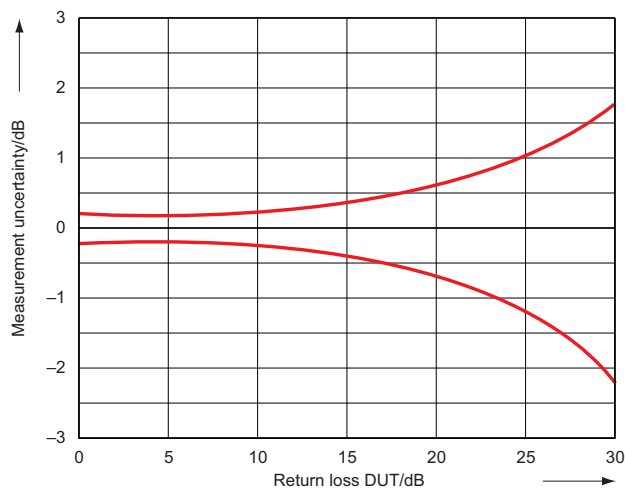

Uncertainty of reflection measurement with R&S®FSH-K42 option

R&S® FSH-K41 distance-to-fault analysis

Return loss	range	1 dB, 2 dB, 5 dB, 10 dB, 20 dB, 50 dB, 100 dB, linear 100 %
	resolution	0.01 dB
VSWR	range	10 dB, 20 dB, 50 dB, 100 dB
	resolution	0.01 dB
Reflection coefficient	range	0 to 1, 0 to 0.1, 0 to 0.01, 0 to 0.001
mRho	range	0 to 1000, 0 to 100, 0 to 10, 0 to 1
Fault resolution		(1.5 ⁸ × velocity factor / span) [meter]
Maximum permissible spurious signal	RF attenuation = 0 dB	nominal 0 dBm

General data

Remote control (R&S® FSH-K40 option)		
Command set		SCPI 1997.0
LAN interface		10/100BaseT, RJ-45
USB		mini B plug, version 1.1
Display		
Resolution		640 pixels × 480 pixels
Audio		
Speaker		internal
Mass memory		
Mass memory		flash memory (internal), SD card (not supplied)
Data storage	internal	>256 instrument settings and traces
	on 1 Gbyte SD card	>5000 instrument settings and traces
Temperature		
	operating temperature range	0 °C to +50 °C
	permissible temperature range	0 °C to +55 °C
	storage temperature range	-40 °C to +70 °C
	battery charging mode	0 °C to +40 °C
Climatic loading	relative humidity	+25 °C/+40 °C at 85 % relative humidity (EN 60068-2-30)
	IP class of protection	51
Mechanical resistance		
Vibration	sinusoidal	EN 60068-2-6
	random	EN 60068-2-64
Shock		40 g shock spectrum, in line with MIL-STD-810F, method 516.4 procedure 1, EN 60068-2-27

Power supply		
R&S®HA-Z201 plug-in AC power supply	input specifications	100 V AC to 240 V AC, 50 Hz to 60 Hz, 700 mA
	output specifications	15 V DC, 2 A
	operating temperature range	0 °C to +40 °C
	storage temperature range	-40 °C to +70 °C
	test mark	VDE, CE, UL, PSE
External DC voltage		14 V to 16 V
Internal battery		Li-ion battery
Capacity	R&S®HA-Z204 (standard)	4.5 Ah
	R&S®HA-Z206 (option)	6.75 Ah
Voltage		nominal 7.2 V
Operating time with new, fully charged battery	R&S®HA-Z204 (standard)	3 h
	R&S®HA-Z206 (option)	4.5 h
Charging time	instrument switched OFF or R&S®HA-Z203 battery charger	
	R&S®HA-Z204 (standard)	2.5 h
	R&S®HA-Z206 (option)	3.5 h
	instrument switched ON	
	R&S®HA-Z204 (standard)	3.5 h
	R&S®HA-Z206 (option)	4.5 h
Life time	charging cycles	>500
Power consumption		typ. 12 W
Safety		IEC 61010-1, EN 61010-1, UL 61010B-1, CSA C22.2 No. 1010-1
Test mark		VDE, GS, CSA, CSA-NRTL
EMC	in line with European EMC Directive 2004/108/EC including	
	EN 61326 class B (emission)	
	CISPR 11/EN 55011/group 1 class B (emission)	
	EN 61326 table A.1 (immunity, industrial)	
Dimensions (W × H × D)	with handle	192 mm × 145 mm × 300 mm (76 in × 57 in × 118 in)
	without handle	192 mm × 70 mm × 300 mm (76 in × 28 in × 118 in)
Weight		<3 kg (<6.6 lb)
Recommended calibration interval		1 year

Accessories

R&S®FSH-Z1 and R&S®FSH-Z18 power sensors


Frequency range	R&S®FSH-Z1	10 MHz to 8 GHz
	R&S®FSH-Z18	10 MHz to 18 GHz
VSWR	10 MHz to 30 MHz	<1.15
	30 MHz to 2.4 GHz	<1.13
	2.4 GHz to 8 GHz	<1.20
	8 GHz to 18 GHz	<1.25
Maximum input power	average power	400 mW (+26 dBm)
	peak power (<10 µs, 1 % duty cycle)	1 W (+30 dBm)
Measurement range		200 pW to 200 mW (-67 dBm to +23 dBm)
Signal weighting		average power
Effect of harmonics		<0.5 % (0.02 dB) at harmonic ratio of 20 dB
Effect of modulation		<1.5 % (0.07 dB) for continuous digital modulation
Absolute measurement uncertainty	sine signals, no zero offset	
	10 MHz to 8 GHz	+15 °C to +35 °C 0 °C to +50 °C
8 GHz to 18 GHz	+15 °C to +35 °C	<3.5 % (0.15 dB)
	0 °C to +50 °C	<5.0 % (0.21 dB)
Zero offset after zeroing		<110 pW
Dimensions		48 mm × 31 mm × 170 mm (1.9 in × 1.22 in × 6.7 in)
	connecting cable	1.5 m (59 in)
Weight		<0.3 kg (0.66 lb)

R&S®FSH-Z14 directional power sensor


Frequency range		25 MHz to 1 GHz
Power measurement range		30 mW to 300 W
VSWR referenced to 50 Ω		<1.06
Power-handling capacity	depending on temperature and matching (see diagram on page 12)	100 W to 1000 W
Insertion loss		<0.06 dB
Directivity		>30 dB
Average power		
Power measurement range		
CW, FM, PM, FSK, GMSK	CF: ratio of peak envelope	30 mW to 300 W
Modulated signals	power to average power	30 mW to 300 W/CF
Measurement uncertainty		
25 MHz to 40 MHz	sine signal	4.0 % of measured value (0.17 dB)
40 MHz to 1 GHz	+18 °C to +28 °C, no zero offset	3.2 % of measured value (0.14 dB)
Zero offset	after zeroing	±4 mW
Range of typical measurement error with modulation	FM, PM, FSK, GMSK	0 % of measured value (0 dB)
	AM (80 %)	±3 % of measured value (±0.13 dB)
	two CW carriers with identical power	±2 % of measured value (±0.09 dB)
	EDGE, TETRA	±0.5 % of measured value (±0.02 dB) ¹
Temperature coefficient	25 MHz to 40 MHz	0.40 %/K (0.017 dB/K)
	40 MHz to 1 GHz	0.25 %/K (0.011 dB/K)

¹ If standard is selected on the R&S®FSH.

Max. peak envelope power		
Power measurement range		
Video bandwidth	4 kHz	0.4 W to 300 W
	200 kHz	1 W to 300 W
	600 kHz	2 W to 300 W
Measurement uncertainty	same as for average power plus effect of peak hold circuit	+18 °C to +28 °C
Error limits of peak hold circuit for burst signals		
Duty cycle ≥ 0.1 and repetition rate $\geq 100/s$	video bandwidth 4 kHz	$\pm(3\%$ of measured value + 0.05 W) starting from a burst width of 200 μs
	video bandwidth 200 kHz	$\pm(3\%$ of measured value + 0.20 W) starting from a burst width of 4 μs
	video bandwidth 600 kHz	$\pm(7\%$ of measured value + 0.40 W) starting from a burst width of 2 μs
$20/s \leq$ repetition rate $<100/s$		plus $\pm(1.6\%$ of measured value + 0.15 W)
$0.001 \leq$ duty cycle < 0.1		plus ± 0.10 W
Temperature coefficient	25 MHz to 40 MHz	0.50 %/K (0.022 dB/K)
	40 MHz to 1 GHz	0.35 %/K (0.015 dB/K)
Load matching		
Matching measurement range		
Return loss		0 dB to 23 dB
VSWR		>1.15
Minimum forward power	specs met from 0.4 W	0.06 W
Dimensions		120 mm \times 95 mm \times 39 mm (4.72 in \times 3.74 in \times 1.53 in)
	connecting cable	1.5 m (59 in)
Weight		0.65 kg (1.43 lb)

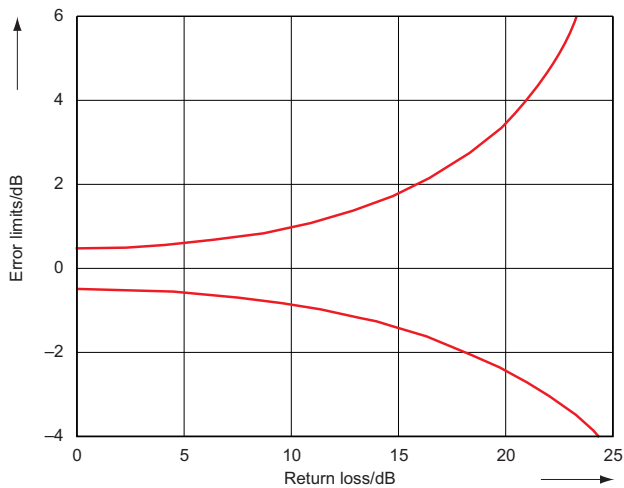

Error limits for matching measurements

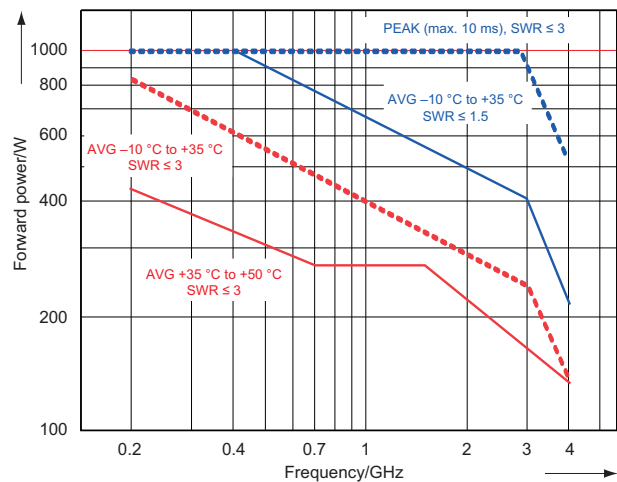

Power-handling capacity


R&S® FSH-Z44 directional power sensor

Frequency range		200 MHz to 4 GHz	
Power measurement range		30 mW to 300 W	
VSWR referenced to 50 Ω	200 MHz to 3 GHz	<1.07	
	3 GHz to 4 GHz	<1.12	
Power-handling capacity	depending on temperature and matching (see diagram on page 14)	120 W to 1000 W	
Insertion loss	200 MHz to 1.5 GHz	<0.06 dB	
	1.5 GHz to 4 GHz	<0.09 dB	
Directivity	200 MHz to 3 GHz	>30 dB	
	3 GHz to 4 GHz	>26 dB	
Average power			
Power measurement range	CF: ratio of peak envelope power to average power		
	CW, FM, PM, FSK, GMSK	30 mW to 300 W	
	3GPP WCDMA, cdmaOne, CDMA2000 ² , DAB, DVB-T	30 mW to 120 W	
	other modulated signals	30 mW to 300 W/CF	
Measurement uncertainty	sine signal, +18 °C to +28 °C, no zero offset		
	200 MHz to 300 MHz	4.0 % of measured value (0.17 dB)	
	300 MHz to 4 GHz	3.2 % of measured value (0.14 dB)	
Zero offset	after zeroing	±4 mW	
Range of typical measurement error with modulation	FM, PM, FSK, GMSK	0 % of measured value (0 dB)	
	AM (80 %)	±3 % of measured value (±0.13 dB)	
	two CW carriers with identical power	±2 % of measured value (±0.09 dB)	
	π/4-DQPSK	±2 % of measured value (±0.09 dB)	
	EDGE	±0.5 % of measured value (±0.02 dB) ³	
	cdmaOne, DAB	±1 % of measured value (±0.04 dB) ³	
	3GPP WCDMA, CDMA2000 ²	±2 % of measured value (±0.09 dB) ³	
DVB-T	±2 % of measured value (±0.09 dB) ³		
Temperature coefficient	200 MHz to 300 MHz	0.40 %/K (0.017 dB/K)	
	300 MHz to 4 GHz	0.25 %/K (0.011 dB/K)	
Max. peak envelope power			
Power measurement range	DAB, DVB-T, cdmaOne, CDMA2000 ² , 3GPP WCDMA	4 W to 300 W	
	Other signals at video bandwidth	4 kHz	0.4 W to 300 W
		200 kHz	1 W to 300 W
		4 MHz	2 W to 300 W
Measurement uncertainty	+18 °C to +28 °C	same as for average power plus effect of peak hold circuit	
Error limits of peak hold circuit for burst signals	duty cycle ≥ 0.1 and repetition rate ≥ 100/s		
	video bandwidth 4 kHz	±(3 % of measured value + 0.05 W) starting from a burst width of 100 μs	
	video bandwidth 200 kHz	±(3 % of measured value + 0.20 W) starting from a burst width of 4 μs	
	video bandwidth 4 MHz	±(7 % of measured value + 0.40 W) starting from a burst width of 1 μs	
	20/s ≤ repetition rate < 100/s	plus ±(1.6 % of measured value + 0.15 W)	
	0.001 ≤ duty cycle < 0.1	plus ±0.10 W	
	burst width ≥ 0.5 μs	plus ±5 % of measured value	
burst width ≥ 0.2 μs	plus ±10 % of measured value		
Range of typical measurement error of peak hold circuit	video bandwidth 4 MHz and standard selected on the R&S®FSH		
	cdmaOne, DAB	±(5 % of measured value + 0.4 W)	
	DVB-T, CDMA2000 ² , 3GPP WCDMA	±(15 % of measured value + 0.4 W)	
Temperature coefficient	200 MHz to 300 MHz	0.50 %/K (0.022 dB/K)	
	300 MHz to 4 GHz	0.35 %/K (0.015 dB/K)	


² CDMA2000[®] is a registered trademark of the Telecommunications Industry Association (TIA - USA).

³ If standard is selected on the R&S®FSH.

Load matching		
Matching measurement range		
Return loss	200 MHz to 3 GHz	0 dB to +23 dB
VSWR	3 GHz to 4 GHz	0 dB to +20 dB
VSWR	200 MHz to 3 GHz	>1.15
	3 GHz to 4 GHz	>1.22
Minimum forward power	specs met from 0.2 W	0.03 W
Dimensions		120 mm × 95 mm × 39 mm (4.72 in × 3.74 in × 1.53 in)
	connecting cable	1.5 m (59 in)
Weight		0.65 kg (1.43 lb)

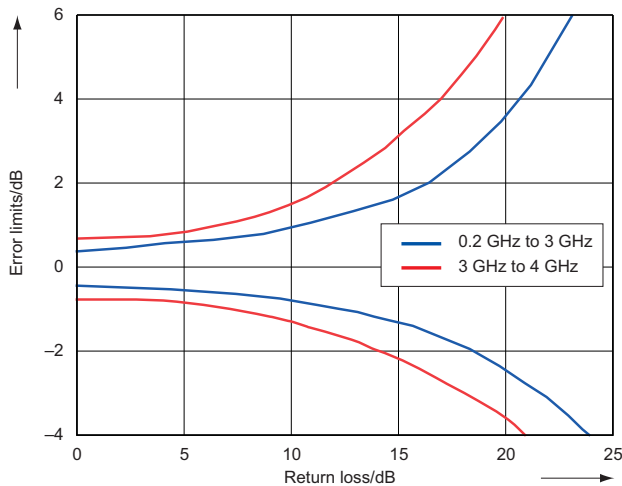

Error limits for matching measurements

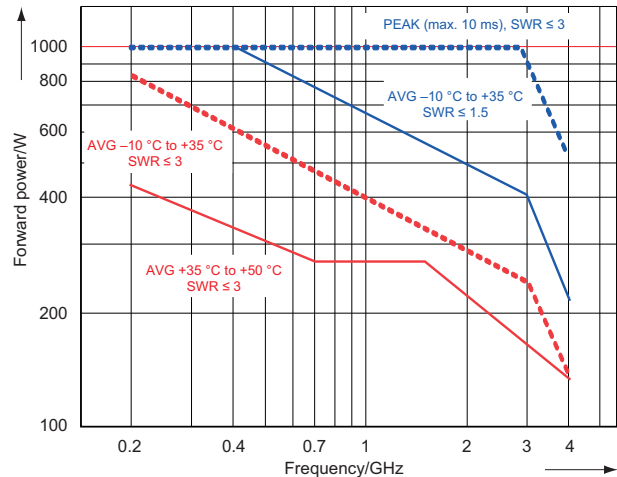

Power-handling capacity

Ordering information

Designation	Type	Order No.
Spectrum Analyzer, 9 kHz to 3.6 GHz, with preamplifier	R&S®FSH4	1309.6000.04
Spectrum Analyzer, 9 kHz to 3.6 GHz, with preamplifier and tracking generator	R&S®FSH4	1309.6000.14
Spectrum Analyzer, 100 kHz to 3.6 GHz, with preamplifier, tracking generator and internal VSWR bridge	R&S®FSH4	1309.6000.24
Spectrum Analyzer, 9 kHz to 8 GHz, with preamplifier	R&S®FSH8	1309.6000.08
Spectrum Analyzer, 9 kHz to 8 GHz, with preamplifier and tracking generator	R&S®FSH8	1309.6000.18
Spectrum Analyzer, 100 kHz to 8 GHz, with preamplifier, tracking generator and internal VSWR bridge	R&S®FSH8	1309.6000.28
Accessories supplied		
Li-ion battery pack, USB cable, LAN cable, AC power supply, CD-ROM with R&S®FSH4View software and documentation, quick start guide		

Options

Designation	Type	Order No.
Remote Control via LAN or USB	R&S®FSH-K40	1304.5606.02
Distance-to-Fault Analysis (for models .24 and .28 only, requires R&S®FSH-Z320 or R&S®FSH-Z321 and R&S®FSH-Z28 or R&S®FSH-Z29)	R&S®FSH-K41	1304.5612.02
Vector Network Analysis (for models .24 and .28 only)	R&S®FSH-K42	1304.5629.02

Accessories

Order designation	Type	Order No.
Power Sensor, 10 MHz to 8 GHz	R&S®FSH-Z1	1155.4505.02
Power Sensor, 10 MHz to 18 GHz	R&S®FSH-Z18	1165.1909.02
Directional Power Sensor, 25 MHz to 1 GHz	R&S®FSH-Z14	1120.6001.02
Directional Power Sensor, 200 MHz to 4 GHz	R&S®FSH-Z44	1165.2305.02
RF Cable (1 m), DC to 8 GHz, armored, N male/N female connectors	R&S®FSH-Z320	1309.6600.00
RF Cable (3 m), DC to 8 GHz, armored, N male/N female connectors	R&S®FSH-Z321	1309.6617.00
Combined Open / Short / 50 Ω Load Calibration Standard DC to 3.6 GHz	R&S®FSH-Z29	1300.7510.03
Combined Open / Short / 50 Ω Load Calibration Standard, DC to 8 GHz	R&S®FSH-Z28	1300.7810.03
Matching Pad 50 Ω / 75 Ω, L section	R&S®RAM	0358.5414.02
Matching Pad 50 Ω / 75 Ω, series resistor 25 Ω	R&S®RAZ	0358.5714.02
Matching Pad 50 Ω / 75 Ω, L section, N to BNC	R&S®FSH-Z38	1300.7740.02
Li-Ion Battery Pack, 6.75 Ah	R&S®HA-Z206	1309.6146.00
Battery Charger for Li-ion battery pack R&S®HA-Z204 and R&S®HA-Z206	R&S®HA-Z203	1309.6123.00
12 V Car Adapter for cigarette lighter	R&S®HA-Z202	1309.6117.00
Soft Carrying Bag	R&S®HA-Z220	1309.6175.00
SD Memory Card, 1 Gbyte	R&S®HA-Z231	1309.6217.00
Headphones	R&S®FSH-Z36	1145.5838.02
Active Directional Antenna, 20 MHz to 7.5 GHz	R&S®HE-300	4067.5900.02
Loop Antenna for R&S®HE300, 9 kHz to 20 MHz	R&S®HE-300-HF	1158.9295.13
Near-Field Probe Set	R&S®HZ-15	1147.2736.02
Preamplifier for R&S®HZ-15	R&S®HZ-16	1147.2720.02
Spare USB Cable	R&S®HA-Z211	1309.6169.00
Spare Ethernet Cable	R&S®HA-Z210	1309.6152.00
Spare Power Supply incl. mains plug for EU, GB, US	R&S®HA-Z201	1309.6100.00

Service you can rely on

- | In 70 countries
- | Person-to-person
- | Customized and flexible
- | Quality with a warranty
- | No hidden terms

About Rohde & Schwarz

Rohde & Schwarz is an independent group of companies specializing in electronics. It is a leading supplier of solutions in the fields of test and measurement, broadcasting, radiomonitoring and radiolocation, as well as secure communications. Established 75 years ago, Rohde & Schwarz has a global presence and a dedicated service network in over 70 countries. Company headquarters are in Munich, Germany.

Regional contact

Europe, Africa, Middle East

+49 1805 12 42 42* or +49 89 4129 137 74

customersupport@rohde-schwarz.com

North America

1-888-TEST-RSA (1-888-837-8772)

customer.support@rsa.rohde-schwarz.com

Latin America

+1-410-910-7988

customersupport.la@rohde-schwarz.com

Asia/Pacific

+65 65 13 04 88

customersupport.asia@rohde-schwarz.com

Certified Quality System
ISO 9001
DQS REG. NO 1954 QM

Certified Environmental System
ISO 14001
DQS REG. NO 1954 UM

For product brochure,
see PD 5214.0482.12
and www.rohde-schwarz.com

Rohde & Schwarz GmbH & Co. KG

Mühldorfstraße 15 | 81671 München

Phone +49 89 41 290 | Fax +49 89 41 29 121 64

www.rohde-schwarz.com

R&S® is a registered trademark of Rohde & Schwarz GmbH & Co. KG
Trade names are trademarks of the owners | Printed in Germany (ch)
PD 5214.0482.22 | Version 02.00 | October 2008 | R&S®FSH4/8
Data without tolerance limits is not binding | Subject to change

*0.14 €/min within German wireline network; rates may vary in other networks (wireline and mobile) and countries.