



ABN 43 064 478 842

231 Osborne Avenue Clayton South, VIC 3169
PO Box 1548, Clayton South, VIC 3169
t 03 9265 7400 f 03 9558 0875
freecall 1800 680 680
www.tmgtestequipment.com.au

Test & Measurement

- > sales
- > rentals
- > calibration
- > repair
- > disposal

Complimentary Reference Material

This PDF has been made available as a complimentary service for you to assist in evaluating this model for your testing requirements.

TMG offers a wide range of test equipment solutions, from renting short to long term, buying refurbished and purchasing new. Financing options, such as Financial Rental, and Leasing are also available on application.

TMG will assist if you are unsure whether this model will suit your requirements.

Call TMG if you need to organise repair and/or calibrate your unit.


If you click on the "Click-to-Call" logo below, you can call us for FREE!

TMG Corporate Website

TMG Products Website



Click-to-Call
TMG Now

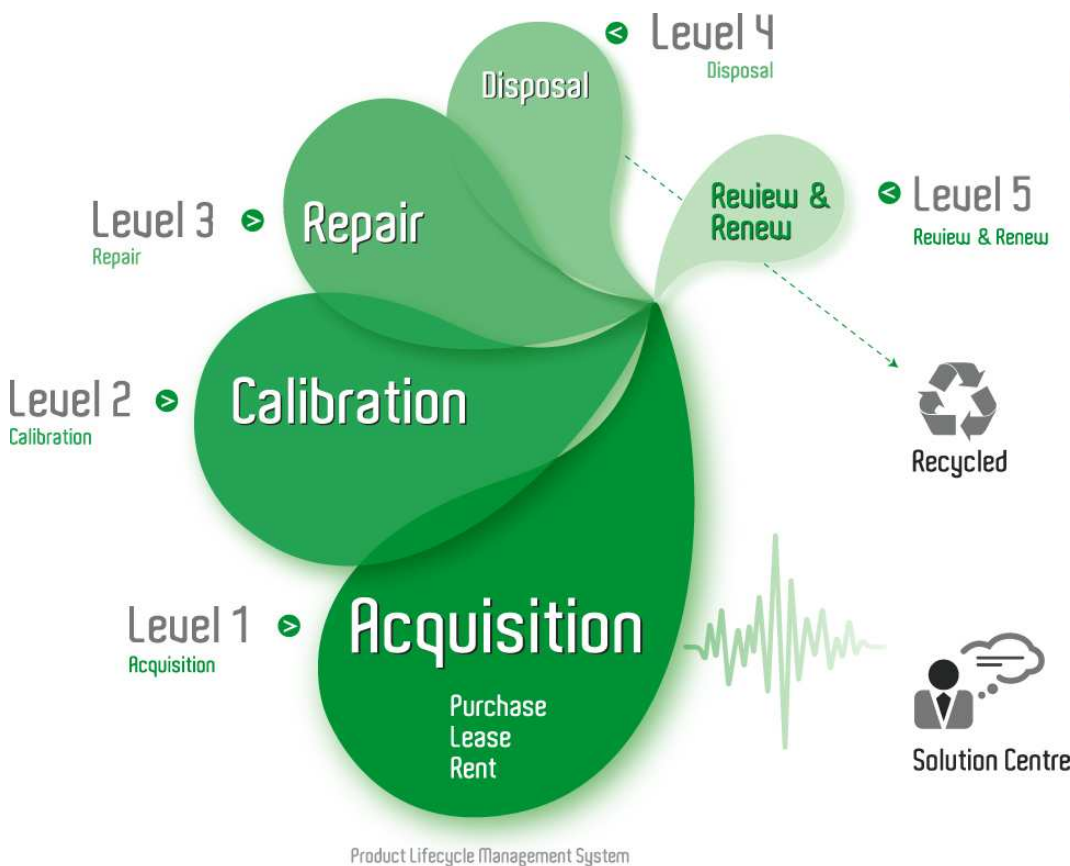

Product Lifecycle Management System

Disclaimer:

All trademarks appearing within this PDF are trademarks of their respective owners.



AC/DC Current Probe

► TCP0030



TCP0030

TCP0030 is a high-performance, easy-to-use AC/DC current probe designed for use and direct connection (without the need of an additional power supply) to the TekVPI probe interface used on Tektronix' new DPO7000 and DPO4000 Series Oscilloscopes. This AC/DC current measurement probe provides greater than 120 MHz of bandwidth with selectable 5 A and 30 A measurement ranges. It also provides exceptional low current measurement capability and accuracy to current levels as low as 1 mA, important for meeting today's challenging current measurement needs.

► Characteristics

Bandwidth – DC to ≥ 120 MHz.

Rise Time – ≤ 2.92 ns.

Max RMS Current – 30 A.

Max Peak Pulse Current – 50 A.

Minimum Sensitivity –

1 mA (on oscilloscopes that support 1 mV/div setting).

AC Coupling (on oscilloscopes that support AC/DC coupling).

Current Ranges – 5 A and 30 A.

Max Bare Wire Voltage – Use insulated wire only.

Typical Characteristics

DC Accuracy –

$\pm 1\%$ typical.

$\pm 3\%$ warranted.

Max Amp-Second Product –

500 A \cdot μ S (in 30 A Range).

Insertion Impedance –

1 m Ω @ 10 kHz.

3.5 m Ω @ 100 kHz.

0.08 Ω @ 1 MHz.

0.15 Ω @ 10 MHz.

0.7 Ω @ 100 MHz.

0.85 Ω @ 120 MHz.

Signal Delay – 14.5 ns.

Environmental

Temperature –

Operating: 0 $^{\circ}$ C to +50 $^{\circ}$ C.

Non-Operating: -40 $^{\circ}$ C to +75 $^{\circ}$ C.

Humidity –

Operating: 5% to 95% Relative Humidity (RH)

at up to +30 $^{\circ}$ C; 5% to 85% RH above 30 $^{\circ}$ C

up to +50 $^{\circ}$ C, non-condensing.

Non-Operating: 5% to 95% Relative Humidity (RH)

at up to +30 $^{\circ}$ C; 5% to 85% RH above 30 $^{\circ}$ C up

to +75 $^{\circ}$ C, non-condensing.

Altitude –

Operating: Up to 3,000 m (10,000 feet).

Non-operating: Up to 12,192 m (40,000 feet).

Regulatory

Compliance Labeling –

CE (European Union).

WEEE (European Union).

► Features & Benefits

Easy to Use and Accurate AC/DC Current Measurements

Connects Directly to DPO7000 and DPO4000 Series Oscilloscopes Using the New TekVPI™ Probe Interface

Provides Automatic Units Scaling and Readout on the Oscilloscope Display

Split-core Construction Allows Easy Circuit Connection

DC to >120 MHz Bandwidth

30 A RMS Maximum Current Capability

50 A Peak Pulse Current Capability

High Accuracy with Typically Less than 1% DC Gain Error

Accurately Measures Current Levels as Low as 1 mA

Low Noise and DC Drift

Easy to Degauss and Autozero

Setup Controls and Probe Status/Diagnostic Indicators Are Provided on Both the Probe Hardware and Via an Easy-to-Access Oscilloscope UI Display Menu

Safety Certified for U.S. and Canada

► Applications

Power Supplies

Semiconductor Devices

Power Inverters/Converters

Electronic Ballasts

Industrial/Consumer Electronics

Mobile Communications

Motor Drives

Transportation Systems

AC/DC Current Probe

▶ TCP0030

▶ Physical Characteristics

Probe Head Size	cm	in.
Height	3.2	1.25
Width	1.6	0.625
Length	20	7.77

Other Dimensions

Cable Length	200	79
Max Conductor Diameter	0.38	0.15

Weight	kg	lbs.
Shipping	1.55	3.44

Power Requirements

TCP0030 is powered directly by the DPO7000 and DPO4000 Series Oscilloscopes using TekVPI™ interface.

Recommended Oscilloscopes

DPO7000 and DPO4000 Series Oscilloscopes with TekVPI probe interface.

Standard Warranty

One year parts and labor.

▶ Ordering Information

TCP0030

AC/DC Current Probe.

Includes: Instruction manual (071-1812-xx English, 071-1813-xx Japanese or 071-1814-xx Simplified Chinese)¹, Protective Cover (016-1923-xx), Probe Ground Lead – 6 in. length (196-3120-xx), Nylon Carrying Case (016-1952-xx).

Language Options

Opt. L5 – Japanese instruction manual.

Opt. L7 – Simplified Chinese instruction manual.

¹ Specify manual language when ordering.

Service Options

Opt. C3 – Calibration Service 3 Years.

Opt. C5 – Calibration Service 5 Years.

Opt. D1 – Calibration Data Report.

Opt. D3 – Calibration Data Report 3 Years (with Opt. C3).

Opt. D5 – Calibration Data Report 5 Years (with Opt. C5).

Opt. R3 – Repair Service 3 Years.

Opt. R5 – Repair Service 5 Years.

Recommended Accessories

Current Loop, 1 Turn, 50 Ω with BNC Connector Used for Performance Verification – Order 015-0601-50.

Contact Tektronix:

ASEAN / Australasia / Pakistan (65) 6356 3900

Austria +41 52 675 3777

Balkan, Israel, South Africa and other ISE Countries +41 52 675 3777

Belgium 07 81 60166

Brazil & South America 55 (11) 3741-8360

Canada 1 (800) 661-5625

Central East Europe, Ukraine and the Baltics +41 52 675 3777

Central Europe & Greece +41 52 675 3777

Denmark +45 80 88 1401

Finland +41 52 675 3777

France & North Africa +33 (0) 1 69 86 81 81

Germany +49 (221) 94 77 400

Hong Kong (852) 2585-6688

India (91) 80-22275577

Italy +39 (02) 25086 1

Japan 81 (3) 6714-3010

Luxembourg +44 (0) 1344 392400

Mexico, Central America & Caribbean 52 (55) 56666-333

Middle East, Asia and North Africa +41 52 675 3777

The Netherlands 090 02 021797

Norway 800 16098

People's Republic of China 86 (10) 6235 1230

Poland +41 52 675 3777

Portugal 80 08 12370

Republic of Korea 82 (2) 528-5299

Russia & CIS 7 095 775 1064

South Africa +27 11 254 8360

Spain (+34) 901 988 054

Sweden 020 08 80371

Switzerland +41 52 675 3777

Taiwan 886 (2) 2722-9622

United Kingdom & Eire +44 (0) 1344 392400

USA 1 (800) 426-2200

For other areas contact Tektronix, Inc. at: 1 (503) 627-7111

Updated 15 June 2005

Our most up-to-date product information is available at:
www.tektronix.com

Product(s) are manufactured
in ISO registered facilities.



Copyright © 2005, Tektronix. All rights reserved. Tektronix products are covered by U.S. and foreign patents, issued and pending. Information in this publication supersedes that in all previously published material. Specification and price change privileges reserved. TEKTRONIX and TEK are registered trademarks of Tektronix, Inc. All other trade names referenced are the service marks, trademarks or registered trademarks of their respective companies.

12/05 HB/WWW

51W-19042-1

Tektronix
Enabling Innovation