



ABN 43 064 478 842

231 Osborne Avenue Clayton South, VIC 3169  
PO Box 1548, Clayton South, VIC 3169  
t 03 9265 7400 f 03 9558 0875  
freecall 1800 680 680  
www.tmgtestequipment.com.au

## Test & Measurement

- > sales
- > rentals
- > calibration
- > repair
- > disposal

## Complimentary Reference Material

This PDF has been made available as a complimentary service for you to assist in evaluating this model for your testing requirements.

TMG offers a wide range of test equipment solutions, from renting short to long term, buying refurbished and purchasing new. Financing options, such as Financial Rental, and Leasing are also available on application.

TMG will assist if you are unsure whether this model will suit your requirements.

Call TMG if you need to organise repair and/or calibrate your unit.

If you click on the "Click-to-Call" logo below, you can call us for FREE!

TMG Corporate Website

TMG Products Website



Click-to-Call  
TMG Now



Product Lifecycle Management System

### Disclaimer:

All trademarks appearing within this PDF are trademarks of their respective owners.





# FP-SURGE 100M2

## 3 Phase Coupling / Decoupling Network for Surge

■ **IEC and EN** standards cover testing of 3 phase AC and DC power ports. They include recommendations for the coupling and decoupling component values within the CDN. These values are largely based on the European model for AC power lines. FP-SURGE 100M2 includes all the IEC and EN requirements with manual coupling path switching. FP-SURGE 100M2 EUT output has specially designed HV terminals, which provide enhanced personnel safety in relation to the high voltage impulse.

In December 2005 the **IEC 61000-4-5 Edition 2** was approved. This new edition 2 defines the maximum voltage drop due to the decoupling inductors. This requires different decoupling inductors dependant on the EUT current. The higher the current the lower the inductance must be. The FP-SURGE 100M2 is compliant to the edition 2.

The **ANSI** standards **C62.41** and **C62.45** contains much the same information as the IEC but based around the American experience with AC power lines. No requirements about voltage drop across the decoupling inductors are included.

Impedance of the low voltage mains supply to earth is simulated by the addition of a 10 ohm resistor for IEC tests. ANSI has NO series resistor in the impulse path This difference comes from the practice in Europe of connecting ground to neutral at the distribution transformer, not the power service entry as in the USA. At the FP-SURGE 100M2 correct coupling elements for either IEC or ANSI can be selected by the user.



---

### ■ Features

- ☑ **Combination wave** 1.2/50us - 8/20us
- ☑ **Ring wave** 100kHz
- ☑ **8kV** impulse voltage
- ☑ Line voltage **690Vac** phase-phase
- ☑ **100A** EUT Current per phase
- ☑ **Phase angle** synchronization for each coupling path
- ☑ **Manual selection** of coupling elements and coupling path

---

### ■ Benefits

**International application** – Specifically designed to meet and exceed the requirements of IEC, EN, and ANSI tests for power line applications.

**Synchronization path switching** - The FP-SURGE 100M2 synchronizes impulses with the selected coupling path.

**Safe and Easy** - The interlocked HV connections allow your operators to test safely and easily.

**Full 100A capability** – Both AC and DC loads up to 100A per phase can be connected through the FP-SURGE 100M2.

**Sturdy and reliable** – Careful component selection ensures that the FP-SURGE 100M2 will continue to operate under the most strenuous testing conditions.

---

### ■ Applications

- ☑ Single & Three phase power line systems
- ☑ **IEC 61000-4-5 Edition 1 & 2** Power line testing
- ☑ IEC 61000-4-12 Power line testing
- ☑ ANSI C62.41 & C.62.45 Power lines
- ☑ Many IEC & EN Product standards

## ■ Technical Specifications

Impulse voltage	max. 8kV	EUT Connections	HV Safety terminals
Impulse current	max. 4kA	Phase Sync.	Follows coupling path
Maximum AC Voltage 50 / 60Hz	690V (phase - phase) 400V (phase - neutral)		
Maximum DC Voltage	110V (Option 3)	Power Supply	85 – 264V 50/60Hz
Current Range Standard IEC high current	up to 100A decoupling Inductor 0.55mH	Current Range Option 2 ANSI+IEC full range	0...100A decoupling Inductors switchable 0.55mH /0.8mH /1.5mH
Current Range Option 1 ANSI	0-100A decoupling Inductor 1.5mH		
Residual voltage at Test supply input	max. twice the peak value of the rated line voltage	Voltage drop due to the decoupling inductors	≤10% with max. current and $\cos \varphi \geq 0.7$


Weights and Dimensions (W x H x D, net weight)

FP-SURGE 100M2 60 x 100 x 190 cm, 220 kg

## ■ FP-SURGE 100M2 Art. No. 249018 Scope of supply

- Qty. 1 FP-SURGE 100M2  
Standard: IEC high current only  
Option 1: ANSI only  
Option 2: ANSI+IEC full range  
Option 3: Adds DC Operation
- Qty. 1 HV cable to connect the generator
- Qty. 1 Coaxial cable 1m
- Qty. 1 Earth bonding cable 1m
- Qty. 1 10A Mains Cable (country specific)
- Qty. 1 Users Manual

## WinFEAT&R Control Window

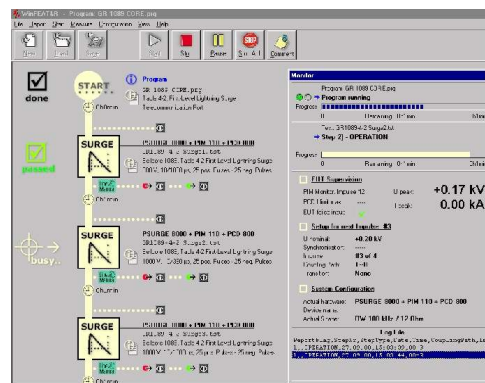

Headquarters  
**Haefely Test AG**  
 Lehenmattstrasse 353  
 CH-4052, Basel  
 Switzerland

+ 41 61 373 41 11  
 + 41 61 373 45 99  
[EMC-sales@haefely.com](mailto:EMC-sales@haefely.com)

Locate your local  
 sales representative at  
[www.haefelyEMC.com](http://www.haefelyEMC.com)



**HAEFELY** EMC  
 TECHNOLOGY

North American Office  
**Hipotronics Inc.**  
**Haefely EMC Division**  
 1650 Route 22  
 Brewster, NY 10509

++1 845 279 3644 x262  
 ++1 845 279 2467  
[EMCsales@hubbell-haefely.com](mailto:EMCsales@hubbell-haefely.com)