



ABN 43 064 478 842

➤ 231 osborne avenue clayton south, vic 3169
PO box 1548, clayton south, vic 3169
t 03 9265 7400 f 03 9558 0875
freecall 1800 680 680
www.tmgtestequipment.com.au

Test & Measurement

- sales
- rentals
- calibration
- repair
- disposal

Complimentary Reference Material

This PDF has been made available as a complimentary service for you to assist in evaluating this model for your testing requirements.

TMG offers a wide range of test equipment solutions, from renting short to long term, buying refurbished and purchasing new. Financing options, such as Financial Rental, and Leasing are also available on application.

TMG will assist if you are unsure whether this model will suit your requirements.

Call TMG if you need to organise repair and/or calibrate your unit.


If you click on the "Click-to-Call" logo below, you can call us for FREE!

TMG Corporate Website

TMG Products Website



Click-to-Call
TMG Now

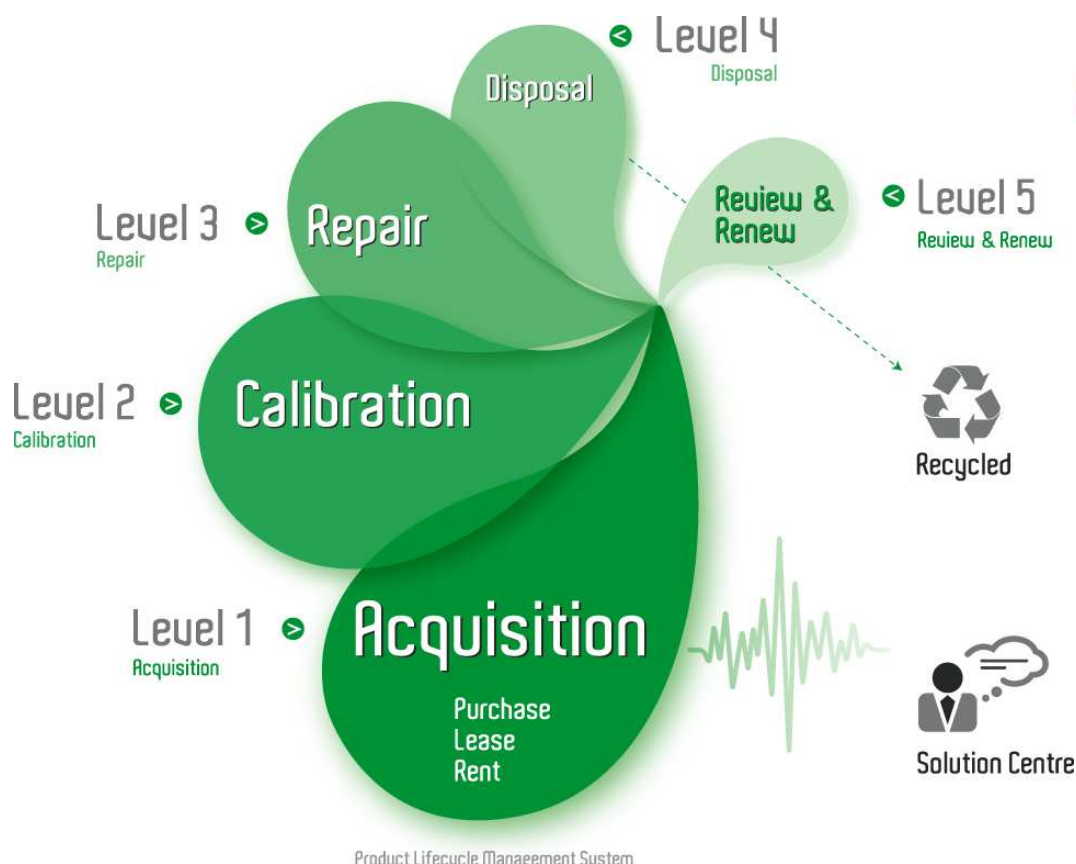

Disclaimer:

All trademarks appearing within this PDF are trademarks of their respective owners.



PCD 150

Coupling and Decoupling Network for Data and Control Lines

■ The **PCD 150** is used for surge coupling onto unshielded data- and signal lines according to IEC/EN standards. Damped oscillatory waves with both 100kHz and 1MHz up to 3.3kV peak as well as ring wave 100kHz with $Z=200$ Ohm up to 4.4kV peak can be coupled.

Coupling and decoupling elements are included in one box because of the sensitive impulse shape.

Manual coupling path switching for differential mode (transverse mode, line to line) and for common mode (longitudinal, line to earth) testing.

Default coupling and protection elements are breakdown avalanche diodes. Therefore the capacitive load to the EUT lines is low.

The PCD 150 can be used together with the impulse modules PIM 150 and the PIM 110 from the Surge Platform. The PSURGE 8000 Surge Platform provides all the programming functions required to perform IEC, ANSI and EN testing also without the need of a control computer.

With a 100 year history of innovation, service centers on three continents and a full staff development and support engineers, Haefely is the clear choice for all your transient immunity test needs.



■ Features

- ☑ Damped oscillatory wave 100kHz and 1MHz
- ☑ Ring Wave 100kHz with $Z=200$ Ohm
- ☑ Up to 4 wires can be tested with a single unit
- ☑ Up to 8 wires can be tested with two units
- ☑ Signal Bandwidth up to some 10kHz
- ☑ Low capacitive load on the EUT lines

■ Benefits

International application – Specifically designed to meet and exceed the requirements of:

- IEC/ EN 61000-4-12 Edition 1 Figure 9, 10, 13 and 14
- IEC/ EN 61000-4-18 Edition 1 Figure 7, 8, 11 and 12

Safe and Easy - All the sockets are safety banana plugs to ensure maximum safety to the user. The selected coupling path can be seen easily at the front panel.

Sturdy and Reliable - Careful component selection ensures that the PCD 150 will continue to operate under the most strenuous testing regimen.

Report Generation - The controller can automatically generate test reports without a computer.

Add **WinFEAT&R** control and reporting software on a host PC to collect and collate data in any format you like.

■ Applications

- ☑ Substation equipment
- ☑ Static Relays
- ☑ Other international requirements for damped oscillatory waves 100kHz / 1MHz and ring wave 100kHz with $Z=200$ Ohm

■ Technical Specifications

Coupling Part		Decoupling Part	
Impulse shapes	Damped Oscillatory Wave with 100kHz and 1MHz Ring wave 100kHz, 200 Ohm	Voltage on EUT lines	max. 56V _{DC} or 40V _{AC,RMS}
Impulse amplitude	max. 3.3kV damped oscillatory waves max. 4.4kV ring wave 100kHz	EUT current	max. 1A per path
Coupling elements	Avalanche breakdown diodes	EUT signal bandwidth	up to some 10kHz (dependant on system impedance)
		Residual voltage at AUX input port	approx. 80V
		Protection elements at AUX input port	Avalanche breakdown diodes - from each line to each other line - from each line to ground Capacitors 5nF from each line to ground

Other coupling and protection elements on request.

■ Weight and Dimensions

Weight	approx. 2 kg net	Dimensions	24 x 16 x 12 cm (w x h x d)
--------	------------------	------------	-----------------------------


■ PCD 150 Art. No. 249804 Scope of supply

Qty. 1	PCD 150
Qty. 1	HV cable Fischer to safety banana plugs
Qty. 1	Cable set
Qty. 5	Short circuit bridges
Qty. 1	Users Manual

■ Options and Accessories

PSURGE 8000	Surge Platform Mainframe <i>Art. No. 249900</i>
PIM 110	Impulse module Ring Wave 100kHz <i>Art. No. 249903</i>
PIM 150	Impulse module Damped Oscillatory Wave with both 100kHz and 1MHz <i>Art. No. 249939</i>
WinFEAT&R	Control and reporting software. Runs under windows 98, NT, ME, 2000, XP <i>Art. No. 249970</i>

WinFEAT&R Control Window

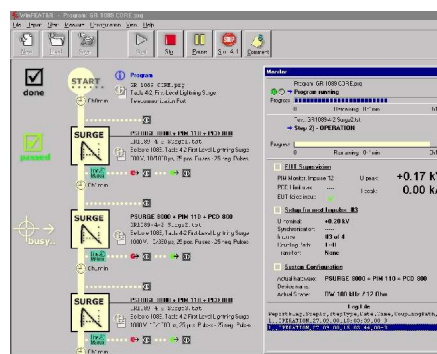

Headquarters
Haefely Test AG
Lehenmattstrasse 353
CH-4052, Basel
Switzerland

+ 41 61 373 41 11
+ 41 61 373 45 99
EMC-sales@haefely.com

Locate your local
sales representative at
www.haefelyEMC.com



HAEFELY EMC
TECHNOLOGY

North American Office
Hipotronics Inc.
Haefely EMC Division
1650 Route 22
Brewster, NY 10509

++1 845 279 3644 x264
++1 845 279 2467

EMCsales@hubbell-haefely.com