



ABN 43 064 478 842

231 Osborne Avenue Clayton South, VIC 3169
PO Box 1548, Clayton South, VIC 3169
t 03 9265 7400 f 03 9558 0875
freecall 1800 680 680
www.tmgtestequipment.com.au

Test & Measurement

- > sales
- > rentals
- > calibration
- > repair
- > disposal

Complimentary Reference Material

This PDF has been made available as a complimentary service for you to assist in evaluating this model for your testing requirements.

TMG offers a wide range of test equipment solutions, from renting short to long term, buying refurbished and purchasing new. Financing options, such as Financial Rental, and Leasing are also available on application.

TMG will assist if you are unsure whether this model will suit your requirements.

Call TMG if you need to organise repair and/or calibrate your unit.


If you click on the "Click-to-Call" logo below, you can call us for FREE!

TMG Corporate Website

TMG Products Website



Click-to-Call
TMG Now

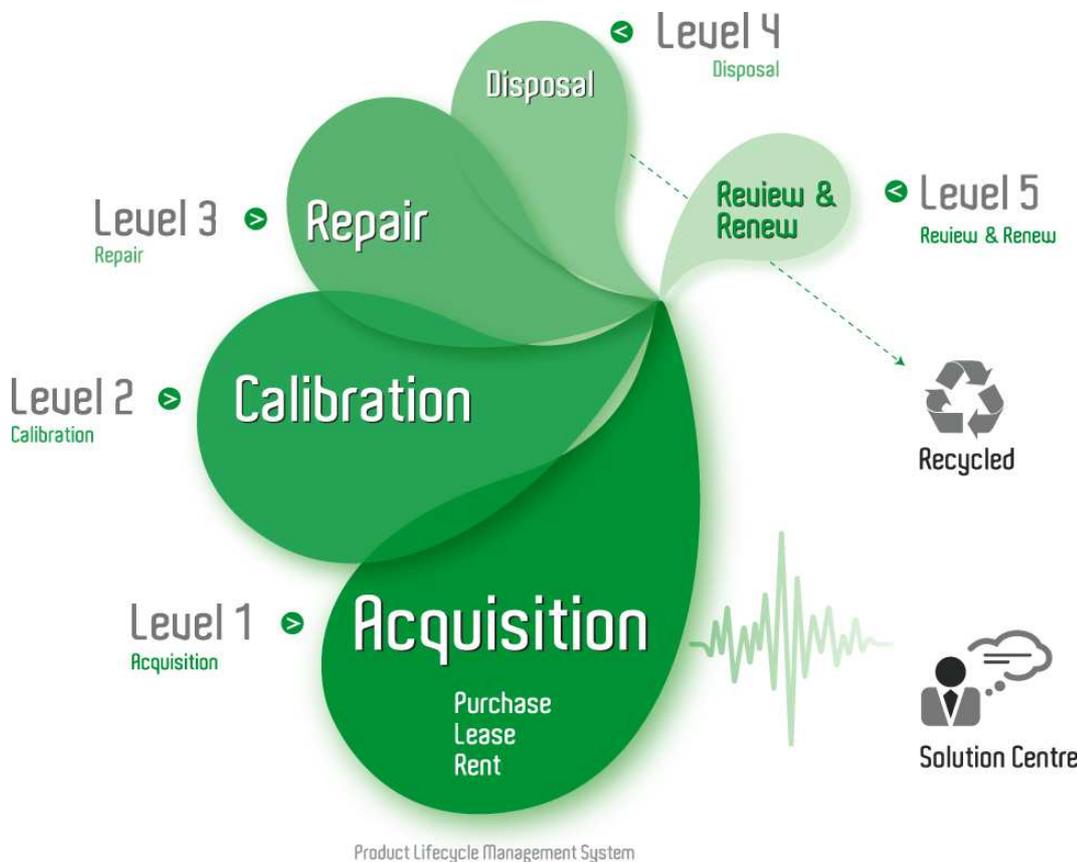

Product Lifecycle Management System

Disclaimer:

All trademarks appearing within this PDF are trademarks of their respective owners.



Critical Power Confidence

MIDTRONICS


CELLTRON® ULTRA Universal Stationary Battery Analyzer

Midtronics battery testing products have been the industry leaders in the automotive, telecommunications, power utility and commercial transportation for more than a decade. Built upon this experience and proven technology, the **CELLTRON ULTRA** offers advanced battery testing capabilities for effective evaluation and maintenance of all stationary power systems including uninterruptible power supplies.

Batteries have been demonstrated to be the “weakest-link” in most UPS systems, and historic methods for evaluation have been cumbersome, confusing and inconclusive. The **CELLTRON ULTRA** combines advanced conductance technology, state-of-the-art portable electronics and convenient data management to facilitate fast, simple, safe and accurate battery management.

Features:

- Enhanced conductance methodology enables accurate and repeatable testing in the presence of ultra-high electrical interference.
- Software and data management techniques allow for the easy establishment of battery reference/baseline values when pre-determined data is not readily available, allowing for “reference-free” testing.
- The industry’s first lighted probes increasing visibility in confined battery cabinets and racks. This advance improves technician safety and test reliability while reducing risk of equipment damage.
- 32 megabyte card stores data up to 500 locations or systems
- Versatile multi-meter function allows for the measurement of AC & DC Voltage and Current. Scope mode displays AC ripple current and more.
- Data on 12 battery manufacturers pre-loaded to expedite testing and record-keeping process.
- ULTRA stores over 250 pre-established reference/benchmark values to assist in the development of battery pass/fail thresholds.
- ULTRA includes two rechargeable battery packs—each providing power for more than 1000 full test sequences, or more than 16 hours of test time.
- Complete kit provides everything needed for performing battery maintenance, including test probes and extenders, test clamps, temperature sensor, PC software and portable printer.

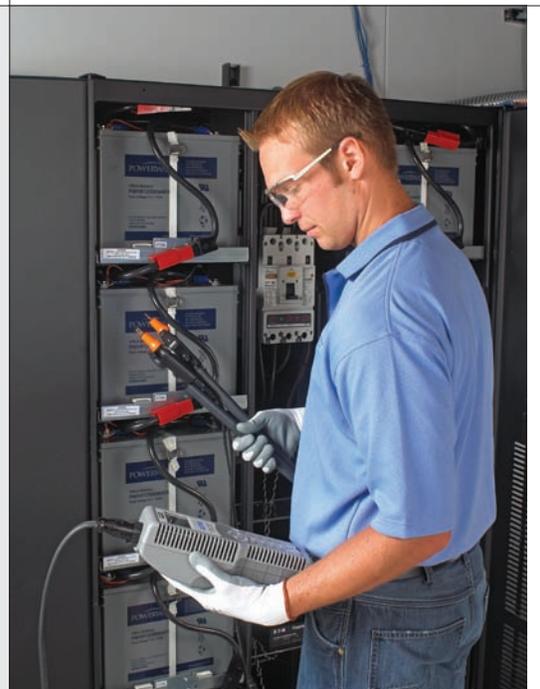

Specifications

Model Number:
CTU-6000

Applications:
Tests individual lead acid cells or monoblocs (up to 16 Volts) in any common configuration, approximately 10-6000 Ah.

Voltage:
1.5 - 20.0 Volts DC

Conductance:
100 - 19,990 Siemens

Test Data Storage:
500 string locations of 480 test results stored internally

Accuracy:
+ 2% across test range

Voltmeter Resolution:
5 mV
User Programmable Functions:

- Preset values for over 250 battery types
- Low voltage alarm setting
- Low conductance warning
- Low conductance failure
- Test mode (push button/auto start)

Calibration:
Auto-calibration prior to every test, no future calibration required

Connectorized Test Cable Options:

- Dual contact clamps
- Dual contact probes
- Custom cables by quotation

Power Requirements:
9.6V, 1600mAH, NiMH
Internal swappable battery & charger

Display:
LCD - FSTN
2.619 in x 1.309 in, 128 x 64 pixels, 40 degree viewing angle, contrast ratio 8, Green LED backlight

Keypad:
Stainless-steel dome, polycarbonate overlay, 1,000,000 actuations

Data Transfer:
Infra-red HP protocol, Infra-red, half-duplex IRDA protocol, RS-232 printer, Secure digital card

Environmental Operating Range:
0 to +40°C, 95% relative humidity, non-condensing

Storage Temperature:
-20 to 82°C

Over Voltage Protection:

- Auto-reset disconnect
- Reverse polarity protected


Housing Material:
Acid resistant ABS plastic santoprene overmold

Analyzer Dimensions:
11 in x 4 in x 3 in
280 mm x 105 mm x 80 mm

Case Dimensions:
19 in x 15.5 in x 7 in
485 mm x 395 mm x 180 mm

Analyzer Weight:
2.6 lb

CTU-6000 Test Kit Shipping Weight:
Approximately 11 lb

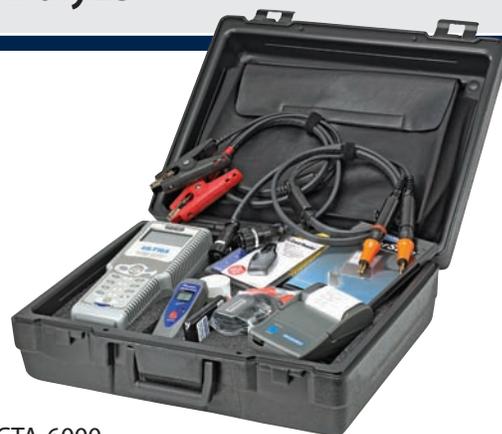

CTA-6000



32 inches

Break-apart probe extensions allow for cabinet access and easy storage