



ABN 43 064 478 842

231 Osborne Avenue Clayton South, VIC 3169
PO Box 1548, Clayton South, VIC 3169
t 03 9265 7400 f 03 9558 0875
freecall 1800 680 680
www.tmgtestequipment.com.au

Test & Measurement

- > sales
- > rentals
- > calibration
- > repair
- > disposal

Complimentary Reference Material

This PDF has been made available as a complimentary service for you to assist in evaluating this model for your testing requirements.

TMG offers a wide range of test equipment solutions, from renting short to long term, buying refurbished and purchasing new. Financing options, such as Financial Rental, and Leasing are also available on application.

TMG will assist if you are unsure whether this model will suit your requirements.

Call TMG if you need to organise repair and/or calibrate your unit.


If you click on the "Click-to-Call" logo below, you can call us for FREE!

TMG Corporate Website

TMG Products Website



Click-to-Call
TMG Now

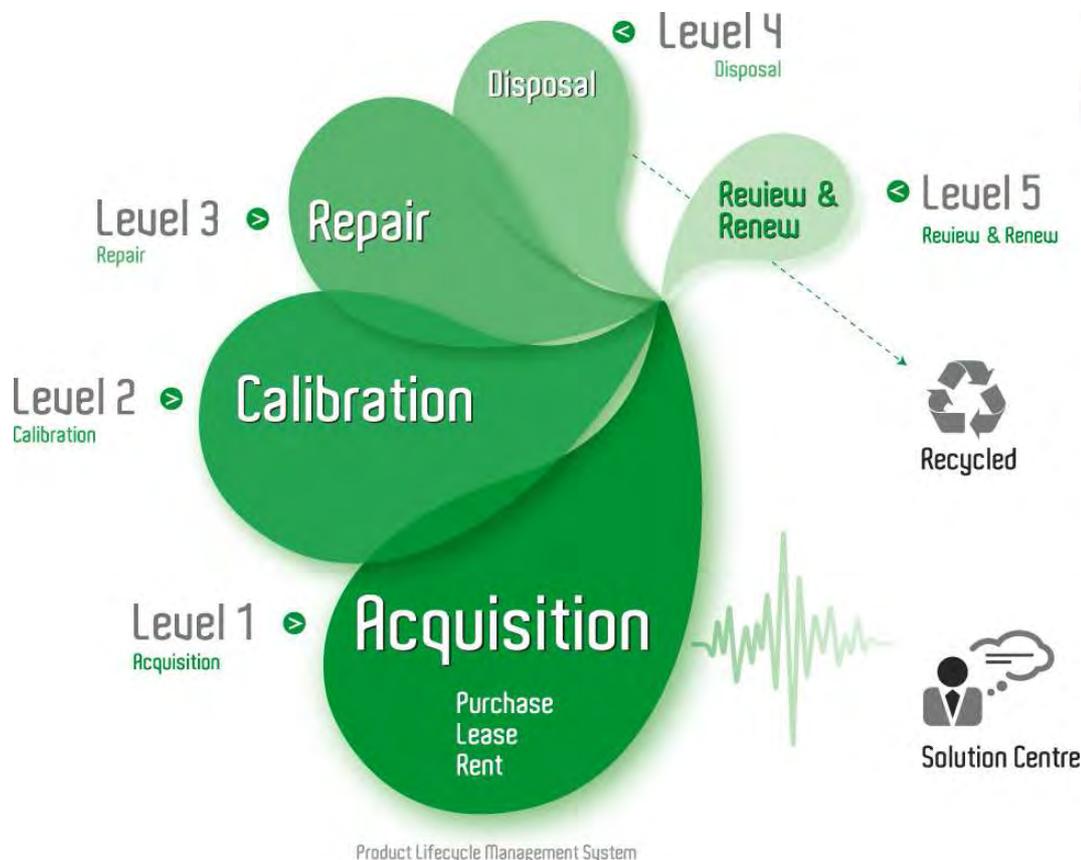

Product Lifecycle Management System

Disclaimer:

All trademarks appearing within this PDF are trademarks of their respective owners.





Fixed Coaxial Attenuator

MODEL WA33B

DC – 8.5 GHz

25 WATTS

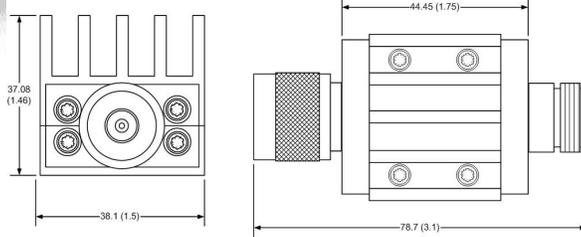

Features

Designed to meet environmental requirements of MIL-DTL-3933.

- Low Intermodulation option available on 10, 20, 30, and 40dB.

Specifications

Nominal Impedance: 50 ohms.

Frequency Range: DC - 8.5 GHz.

Nominal dB Values: 3 - 40 dB.

Power Sensitivity: < 0.005 dB/dB/W;
Bidirectional in power.

Power Rating: 25 watts average to 25°C ambient temperature, de-rated linearly to 15 watts at 125°C. 5 kilowatt peak (5 µsec pulse width; 1.5% duty cycle).

Temperature Range: -55°C to +125°C.

Temperature Coefficient: < 0.0004 dB/dB/°C.

Calibration: Insertion Loss and VSWR performed across frequency range. Calibration test data available at additional cost.

Standard Nominal Values and Deviations:

Atten. (dB)	Accuracy ± dB			
	DC - 4.0 GHz		4.0 - 8.5 GHz	
	WA33B	WA33B-LIM	WA33B	WA33B-LIM
3,6	0.3	--	0.6	--
10,20	0.3	0.4	0.6	0.7
30	0.6	0.7	1.0	1.20
40	0.8	1.0	1.5	1.30

Construction: Black aluminum alloy body with passivated stainless steel connectors. Gold plated beryllium copper contacts.

Maximum VSWR:

Frequency (GHz)	VSWR
DC – 4.0	1.20
4.0 – 8.5	1.30

Connectors: Type N or SMA stainless steel M/F connectors per MIL-STD-348A, interface dimensions mate nondestructively with MIL-PRF-39012.

Add -LIM after connector option for Low Intermodulation option. Example: WA33-XX-XX-LIM

Weight:

Type N .17 kg/ 6 oz.

Physical Dimensions:

Connector Type	Length
Type N	81.53 (3.21)
SMA	71.12 (2.80)

Note: Dimensions are given in mm (inches) and are maximum, unless otherwise specified



WEINSCHTEL ASSOCIATES

TEL: 877.948.8342 / 301.963.4630 ♦ Fax: 301.963.8640

WEB: <http://www.WeinschelAssociates.com>

EMAIL: sales@WeinschelAssociates.com