



ABN 43 064 478 842

➤ 231 osborne avenue clayton south, vic 3169  
PO box 1548, clayton south, vic 3169  
t 03 9265 7400 f 03 9558 0875  
freecall 1800 680 680  
[www.tmgtestequipment.com.au](http://www.tmgtestequipment.com.au)

## Test & Measurement

- sales
- rentals
- calibration
- repair
- disposal

## Complimentary Reference Material

This PDF has been made available as a complimentary service for you to assist in evaluating this model for your testing requirements.

TMG offers a wide range of test equipment solutions, from renting short to long term, buying refurbished and purchasing new. Financing options, such as Financial Rental, and Leasing are also available on application.

TMG will assist if you are unsure whether this model will suit your requirements.

Call TMG if you need to organise repair and/or calibrate your unit.

If you click on the “Click-to-Call” logo below, you can call us for FREE!

TMG Corporate Website

TMG Products Website



Click-to-Call  
TMG Now



### Disclaimer:

All trademarks appearing within this PDF are trademarks of their respective owners.






## 2200L POWER AMPLIFIER

200 Watts  
RF Power  
For:

- Ultrasonic
  - Testing
  - Laboratory use
- 
- 10 KHz to 12 MHz
  - Instantaneous Bandwidth
  - 200 W 1dB Compression
  - Solid State
  - Air Cooled

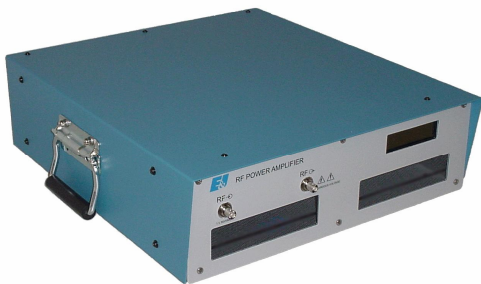

The 2200L Amplifier is a rugged source of RF power, useful for ultrasonics, laser modulation, RFI/EMI, plasma equipment and general laboratory applications. The 2200L represents E&I's commitment to providing RF power amplifiers of the highest quality, durability and ruggedness.

### **FLEXIBILITY:**

The 2200L produces 200 Watts of class A linear power output over the entire frequency range from 10 KHz to 12 MHz. It has very low harmonic distortion along with low IMD products. Operation over the band is achieved without the need for any band switching or indeed any adjustments. The power gain is rated at 53 dB with a typical gain flatness of +/- 1.5 dB

The 2200L is compatible with most signal generators, frequency synthesizers, sweep generators and other laboratory signal sources. It accurately reproduces all waveforms within its power and frequency ranges: AM, FM, SSB, pulsed and other complex modulation schemes.

### **RUGGEDNESS:**

The 2200L is built to withstand a 13 dBm input (1.0 Volt RMS) for any VSWR load condition. The internal switched mode power supply is very conservatively rated, in order to facilitate operation over a large range of line conditions and temperatures. The forced air cooling provides for low internal temperatures, providing long term reliability. The RF power is delivered by rugged DMoS FETs, de-rated to provide for excellent MTBF figures.

# 2200L POWER AMPLIFIER

## Class of Operation

Class A

## Frequency Range

10 KHz to 12 MHz

## Rated Power Output

200 Watts (P1dB)

## Saturated Power Output

10 KHz to 12 MHz > 250 W

30 KHz to 10 MHz > 300 W

## Gain

53 dB (nominal)

## Gain Flatness

+/- 1.5 dB

## Input Power for rated Pout

1 mW

## Input Impedance / VSWR

50Ω / 1.5:1 maximum

## Output Impedance / VSWR

50Ω / 1.25:1 maximum

## Harmonic Level

< -25dBc

## Ruggedness

∞:1 VSWR

## Stability

Unconditional into any passive load.

## Protection

Input: Unit will withstand input signal of +13 dBm without damage (1.0 V rms) max. and infinite load VSWR.

## Front Panel Display

Front panel indicates forward and reflected Power.

## Third Order Intercept Point

IP3 ~ 62 dBm

## AC Input

104 – 240 Volts

## Temperature Range

0 – 40 C

## Cooling

Forced air.

## Weight

45 lbs (20.5 Kg)

## Dimensions

5.2 x 16.5 x 18.1 (H x W x D)



150 Lucius Gordon Drive.  
Rochester, NY 14586  
Tel: (585) 214 0598  
Fax: (585) 214 0580  
[WWW.ElectronicsAndInnovation.com](http://WWW.ElectronicsAndInnovation.com)