



ABN 43 064 478 842

➤ 231 osborne avenue clayton south, vic 3169
PO box 1548, clayton south, vic 3169
t 03 9265 7400 f 03 9558 0875
freecall 1800 680 680
www.tmgtestequipment.com.au

Test & Measurement

- sales
- rentals
- calibration
- repair
- disposal

Complimentary Reference Material

This PDF has been made available as a complimentary service for you to assist in evaluating this model for your testing requirements.

TMG offers a wide range of test equipment solutions, from renting short to long term, buying refurbished and purchasing new. Financing options, such as Financial Rental, and Leasing are also available on application.

TMG will assist if you are unsure whether this model will suit your requirements.

Call TMG if you need to organise repair and/or calibrate your unit.

If you click on the “Click-to-Call” logo below, you can call us for FREE!

TMG Corporate Website

TMG Products Website



Click-to-Call
TMG Now



Disclaimer:

All trademarks appearing within this PDF are trademarks of their respective owners.






A-500 POWER AMPLIFIER

500 Watts
RF Power
For:

- Ultrasonic
 - Testing
 - Laboratory use
-
- 300 KHz to 35 MHz
 - Instantaneous Bandwidth
 - 500 W 1dB Compression
 - Solid State
 - Air Cooled

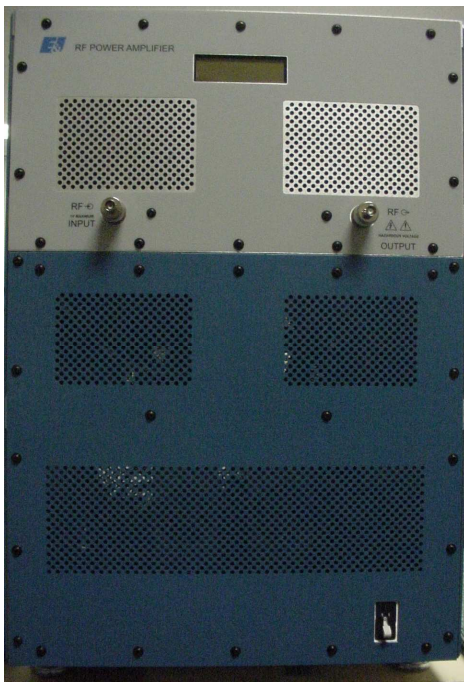

The A-500 Amplifier is a rugged source of RF power, useful for ultrasonics, HF transmitters, RFI/EMI, plasma equipment and general laboratory applications. The A-500 represents E&I's commitment to providing RF power amplifiers of the highest quality, durability and ruggedness.

FLEXIBILITY:

The A-500 produces 500 Watts of class A linear power output over the entire frequency range from 300 KHz to 35 MHz. It has very low harmonic distortion along with low IMD products. Operation over the band is achieved without the need for any band switching or indeed any adjustments. The power gain is rated at 57 dB with a typical gain flatness of +/- 1.5 dB

The A-500 is compatible with most signal generators, frequency synthesizers, sweep generators and other laboratory signal sources. It accurately reproduces all waveforms within its power and frequency ranges: AM, FM, SSB, pulsed and other complex modulation schemes.

RUGGEDNESS:

The A-500 is built to withstand a 13 dBm input (1.0 Volt RMS) for any VSWR load condition. The internal switched mode power supply is very conservatively rated, in order to facilitate operation over a large range of line conditions and temperatures. The forced air cooling provides for low internal temperatures, providing long term reliability. The RF power is delivered by rugged DMOs FETs, de-rated to provide for excellent MTBF.

A-500

POWER AMPLIFIER

Class of Operation

Class A

Frequency Range

300 KHz to 35 MHz

Rated Power Output

500 Watts (P1dB)

Saturated Power Output

700 W Maximum

Gain

57 dB (nominal)

Gain Flatness

+/- 1.5 dB

Input Power for rated Pout

1 mW Max

Input Impedance / VSWR

50 Ω / 1.5:1 maximum

Output Impedance / VSWR

50 Ω / 1.25:1 maximum

Harmonic Level

< -25dBc

Ruggedness

oo:1 VSWR

Stability

Unconditional into any passive load.

Protection

Input: Unit will withstand input signal of +13 dBm without damage (1.0 V rms) max. and infinite load VSWR.

Front Panel Display

Indicates forward and reflected power

Third Order Intercept Point

IP3 ~ 63 dBm

AC Input

3 ϕ 200–400+/-10% VAC 50-60 Hz
Max current 15 Amps/ ϕ @ 200 VAC

Temperature Range

0 – 40 C

Cooling

Forced air.

Weight

88 lbs (40 Kg)

Dimensions

H = 25" (635 mm)
W = 17" (432 mm)
D = 20" (508 mm)



150 Lucius Gordon Drive.
West Henrietta, NY 14586
Tel: (585) 214 0598
Fax: (585) 214 0580
www.eandiltd.com