



ABN 43 064 478 842

231 Osborne Avenue Clayton South, VIC 3169
PO Box 1548, Clayton South, VIC 3169
t 03 9265 7400 f 03 9558 0875
freecall 1800 680 680
www.tmgtestequipment.com.au

Test & Measurement

- > sales
- > rentals
- > calibration
- > repair
- > disposal

Complimentary Reference Material

This PDF has been made available as a complimentary service for you to assist in evaluating this model for your testing requirements.

TMG offers a wide range of test equipment solutions, from renting short to long term, buying refurbished and purchasing new. Financing options, such as Financial Rental, and Leasing are also available on application.

TMG will assist if you are unsure whether this model will suit your requirements.

Call TMG if you need to organise repair and/or calibrate your unit.

If you click on the "Click-to-Call" logo below, you can call us for FREE!

TMG Corporate Website

TMG Products Website



Click-to-Call
TMG Now



Product Lifecycle Management System

Disclaimer:

All trademarks appearing within this PDF are trademarks of their respective owners.



The NIC 10G

The Digital Lightwave NIC 10G Network Information Computer is an intuitive portable testing platform for high-speed OTN, SONET/SDH, and POS networks.

The Digital Lightwave NIC 10G[®] Network Information Computer[®] is a portable instrument for verifying and qualifying the performance of G.709 OTN (OTU 1 and OTU 2), OC-192c/OC-48c SONET, STM-64/STM-16 SDH, POS and DWDM telecommunications networks.

The NIC 10G is the most compact and cost-effective diagnostic platform for OTN and 10/2.5 Gbps on the market. An intuitive touch-sensitive GUI enables technicians of any experience level to effectively operate the NIC 10G, minimizing training costs.

Equipped with both OTN OTU 1 and OTU 2 capabilities, the NIC 10G is more comprehensive, significantly lighter, and less expensive than competing models. Its flexible software/firmware-based design lets you configure the NIC 10G to meet your current needs, then upgrade quickly and inexpensively as your network environment changes.

The NIC 10G is also fully interoperable with the entire NIC product line, providing a broad range of diagnostic capabilities—from DS0/64 Kbps through 10.7/10G rates, including OTN, GigE, ATM, POS, and OSA.

Combining innovative features, functionality and performance into a single cost-effective product, the NIC 10G is the most advanced high-speed testing platform available today.




Network Information Computer (NIC 10G)

The NIC 10G

The Network Information Computer product family is a comprehensive line of portable analyzers used during the design, manufacture, installation, and maintenance of global fiber-optic networks, including G.709 OTN (OTU 1 and OTU 2), SONET/SDH, DWDM/OSA, GigE, ATM, POS, Jitter, and T/E-Carrier.

Major Features:

- OC-192/STM-64 and OC-48/STM-16 SONET/SDH protocol processors (includes concatenated payload support)
- 10.7 Gbps OTU 2 analysis (optional)
- 2.67 Gbps OTU 1 analysis (optional)
- FEC code RS (255/239)
- OC-48/STM-16 add/drop
- OC-192/STM-64 through-mode with overhead manipulation
- OC-192/STM-64 1310 or 1550 nm wavelength laser
- OC-48/STM-16 1310 nm, 1550 nm or switchable wavelength laser option
- Packet over SONET/SDH (POS) for 10G rates (optional)
- OC-192/STM-64 to STS-1/STM-0 mapping (optional)
- Round-trip delay measurement capabilities at 2.5 and 10 Gbps
- Auto configuration to pattern level
- Tandem connection monitoring (TCM), automatic protection switching (APS), and STS/AU pointer sequencing
- Alarm/error generation and analysis
- Built-in optical power and frequency measurement
- Troublescan
- A 10.4-inch active matrix color display with touch screen
- Graphical switch matrix, graphical results
- Remote control GUI
- SCPI over GPIB, TCP/IP, or RS-232c
- Software/firmware upgradeable via Web

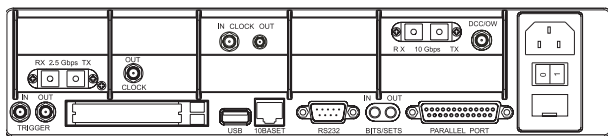

Connector Panel

General Specifications

Operating Temperature: 0° to 40° C @ 85% RH
 Storage Temperature: -20° to 60° C @ 95% RH
 Power Requirements: 100-120 and 200-240 VAC, 50-60 Hz
 Dimensions: 10.1 H x 12.3 W x 4.7 D in (257 x 312 x 120 mm)
 Weight: Approximately 12 pounds

Auxiliary Interfaces

RS-232: DB-9
 Parallel Port: DB-25
 USB
 Input/Output Trigger: SMA
 10G Clock Out
 2.5G Clock Out

BITS/SETS Clock: Bantam
 PCMCIA: Dual Slot: 2-Type II or 1-Type III
 802.11B: Wireless LAN
 PCMCIA Support
 10 BaseT: RJ-45

Ordering Information

For complete feature availability, ordering and pricing information, call your Digital Lightwave sales representative at +1 727 442 6677, or visit our Web site at www.lightwave.com.

Specifications are subject to change without notice.



www.Lightwave.com
info@Lightwave.com

Americas
 Corporate Headquarters
 15550 Lightwave Drive
 Clearwater, FL 33760
 Toll free: +1 877 442 DIGL
 T: +1 727 442 6677
 F: +1 727 442 5660

Europe/Middle East/Africa
 Eastway Enterprise Centre
 7 Paynes Park
 Hitchin Hertfordshire
 England SG5 1EH
 T: +44 (0) 1462 429719
 F: +44 (0) 1462 429760

Asia/Pacific Rim
 Braeside Grove
 Unit 4, Sibthorpe Street
 Braeside, Victoria,
 Australia 3195
 T: +61.3.9587 4900
 F: +61.3.9587 4990

Digital Lightwave provides industry-leading products, technologies, and services for deploying and managing communications networks. Telecommunications service providers and equipment manufacturers rely on our offerings to develop, install, maintain, and manage high-performance networks. With a presence in more than 80 countries, Digital Lightwave enables customers to successfully implement global communications networks worldwide. To find the nearest sales office, please visit www.lightwave.com.

