



ABN 43 064 478 842

➤ 231 osborne avenue clayton south, vic 3169  
PO box 1548, clayton south, vic 3169  
t 03 9265 7400 f 03 9558 0875  
freecall 1800 680 680  
[www.tmgtestequipment.com.au](http://www.tmgtestequipment.com.au)

## Test & Measurement

- sales
- rentals
- calibration
- repair
- disposal

## Complimentary Reference Material

This PDF has been made available as a complimentary service for you to assist in evaluating this model for your testing requirements.

TMG offers a wide range of test equipment solutions, from renting short to long term, buying refurbished and purchasing new. Financing options, such as Financial Rental, and Leasing are also available on application.


TMG will assist if you are unsure whether this model will suit your requirements.

Call TMG if you need to organise repair and/or calibrate your unit.

If you click on the “Click-to-Call” logo below, you can call us for FREE!

TMG Corporate Website

TMG Products Website

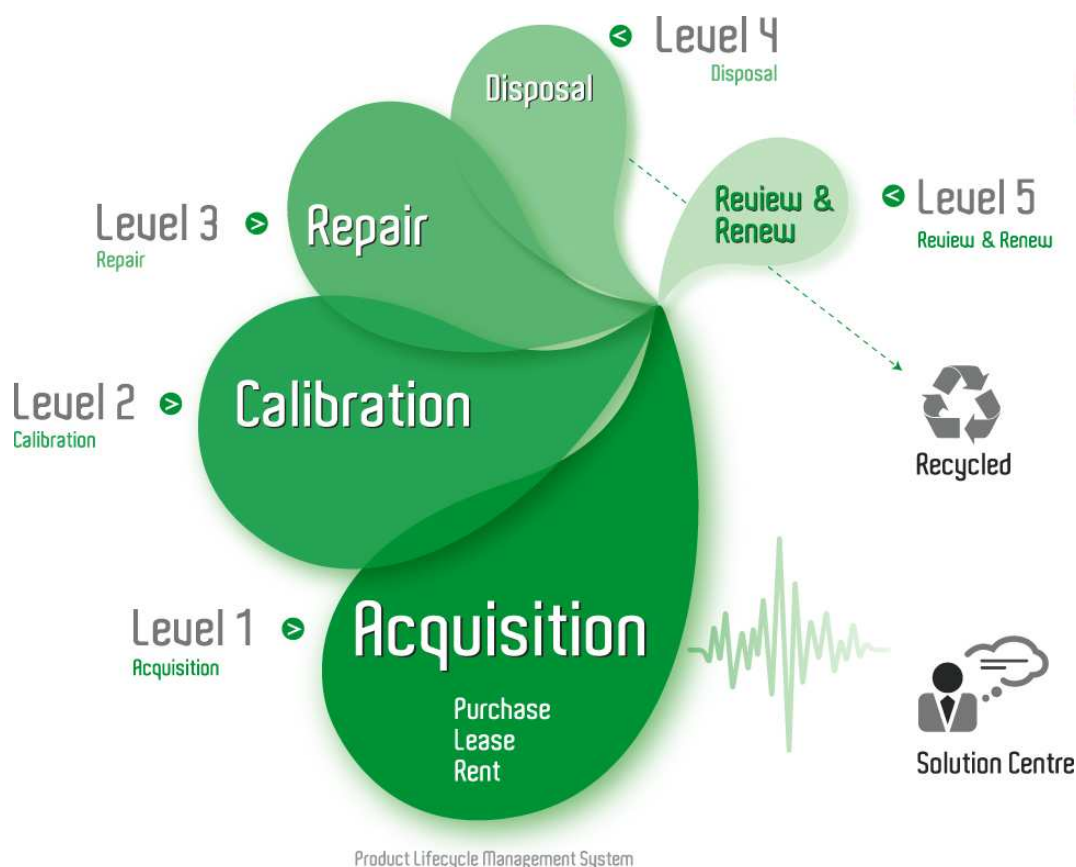

### Disclaimer:

All trademarks appearing within this PDF are trademarks of their respective owners.



- Wide-spectrum LED models for PMD measurement
- 2 kHz modulation for fiber identification
- Three-way powering
- Battery life up to 40 hours

### Wide-Spectrum Polarized Source

Specially designed to work with the FTB-5500 PMD Analyzer, the wide-spectrum FLS-110 Optical Polarized Source provides the high power output needed to measure polarization mode dispersion in the field.

### Practical Features

The FLS-110 offers CW and 2 kHz modulation for fiber identification, complete status indicators, low battery indicator and an auto-off function. The unit is housed in a sturdy, waterproof case surrounded by a shock-absorbing holster that protects the instrument in tough field conditions. Choose between the 1310 nm or the 1550 nm LED models. Both units feature high and low power levels to maximize battery life.

### Power to Spare

The FLS-110 features three complementary power sources for extended operation. When the rechargeable NiCd battery runs low, the unit automatically switches to the 9 V alkaline battery backup. An AC adapter/charger is also supplied for continuous operation.

# Optical Polarized Source

## SPECIFICATIONS

### GENERAL SPECIFICATIONS

Size (H x W x D) 22 cm x 11 cm x 5 cm (8 7/8 in x 4 1/2 in x 2 in)

Weight  
unit 0.75 kg (1 1/2 lb)  
shipping 2.5 kg (5 lb)

Temperature  
operating -10 °C to 40 °C (14 °F to 122 °F)  
storage -30 °C to 60 °C (-22 °F to 140 °F)

Power NiCd batteries, 9 V alkaline batteries,  
AC adapter/charger

Battery life (NiCd + 9 V) Up to 40 hours

### STANDARD ACCESSORIES

User guide, AC adapter/charger, built-in NiCd batteries, 9 V alkaline battery, carrying case, protective holster, shoulder strap and Certificate of Compliance

### POLARIZED SOURCE SPECIFICATIONS<sup>1</sup>

Model	-02P	-03P
Nominal Wavelength (nm)	1310	1550
Spectral width (nm)	≥ 35	≥ 65
Emitter type	LED	LED
Typical output power (dBm) 9/125 μm	-16	-20

### SAFETY

This product complies with 21 CFR 1040.10 and 1040.11, and with IEC 60825-1:1993+A1:1997. CLASS 1 LED PRODUCT

### Notes

1. At 23 °C ± 2 °C.

## ORDERING INFORMATION

**FLS-110-XXX-XX**

**Source code**  
**Single wavelength**  
02P = 1310 nm LED  
03P = 1550 nm LED

**Connector code**  
58 = FC/APC narrow key  
89 = FC/UPC  
91 = SC/UPC  
EI-EUI-28 = UPC/DIN 47256  
EI-EUI-76 = UPC/HMS-10/AG  
EI-EUI-89 = UPC/FC  
EI-EUI-90 = UPC/ST  
EI-EUI-91 = UPC/SC  
EI-EUI-95 = UPC/E-2000  
EA-EUI-28 = APC/DIN 47256  
EA-EUI-89 = APC/FC  
EA-EUI-91 = APC/SC  
EA-EUI-95 = APC/E-2000


Example: FLS-110-02P-EI-EUI-89 for FC/UPC interface  
FLS-110-02P-EA-EUI-89 for FC/APC interface

Find out more about EXFO's extensive line of high-performance portable instruments by visiting our website at [www.exfo.com](http://www.exfo.com).



### Rugged Handheld Solutions

- OLTS
- Power meter
- Light source
- Talk set



### Optical Fiber

- OTDR
- OLTS
- ORL meter
- Switch

### DWDM Test Systems

- OSA
- PMD analyzer
- Chromatic dispersion analyzer
- Multiwavelength meter

### Telecom/Datacom

- 10/100 and Gigabit Ethernet
- SONET/SDH (DS0 to OC-192c)
- SDH/PDH (64 kb/s to STM-64c)

Corporate Headquarters > 400 Godin Avenue, Vanier (Quebec) G1M 2K2 CANADA | Tel.: 1 418 683-0211 | Fax: 1 418 683-2170 | [info@exfo.com](mailto:info@exfo.com)

Toll-free: 1 800 663-3936 (USA and Canada) | [www.exfo.com](http://www.exfo.com)

EXFO America	4275 Kellway Circle, Suite 122	Addison, TX 75001 USA	Tel.: 1 800 663-3936	Fax: 1 972 836-0164
EXFO Europe	Le Dynasteur, 10/12 rue Andras Beck	92366 Meudon la Forêt Cedex FRANCE	Tel.: +33.1.40.83.85.85	Fax: +33.1.40.83.04.42
EXFO Asia-Pacific	151 Chin Swee Road, #03-29 Manhattan House	SINGAPORE 169876	Tel.: +65 6333 8241	Fax: +65 6333 8242
EXFO China	Beijing New Century Hotel Office Tower, Room 1754-1755 No. 6 Southern Capital Gym Road	Beijing 100044 P. R. CHINA	Tel.: +86 (10) 6849 2738	Fax: +86 (10) 6849 2662

EXFO is certified ISO 9001 and attests to the quality of these products. This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. EXFO has made every effort to ensure that the information contained in this specification sheet is accurate. However, we accept no responsibility for any errors or omissions, and we reserve the right to modify design, characteristics and products at any time without obligation. Units of measurement in this document conform to SI standards and practices.

Contact EXFO for prices and availability or to obtain the phone number of your local EXFO distributor.

For the most recent version of this spec sheet, please go to the EXFO website at <http://www.exfo.com/specs>  
In case of discrepancy, the Web version takes precedence over any printed literature.