



ABN 43 064 478 842

231 Osborne Avenue Clayton South, VIC 3169
PO Box 1548, Clayton South, VIC 3169
t 03 9265 7400 f 03 9558 0875
freecall 1800 680 680
www.tmgtestequipment.com.au

Test & Measurement

- > sales
- > rentals
- > calibration
- > repair
- > disposal

Complimentary Reference Material

This PDF has been made available as a complimentary service for you to assist in evaluating this model for your testing requirements.

TMG offers a wide range of test equipment solutions, from renting short to long term, buying refurbished and purchasing new. Financing options, such as Financial Rental, and Leasing are also available on application.

TMG will assist if you are unsure whether this model will suit your requirements.

Call TMG if you need to organise repair and/or calibrate your unit.

If you click on the "Click-to-Call" logo below, you can call us for FREE!

TMG Corporate Website

TMG Products Website



Click-to-Call
TMG Now



Product Lifecycle Management System

Disclaimer:

All trademarks appearing within this PDF are trademarks of their respective owners.



CMA4000 Specifications

| | | |
|--------------------------------|---|-----------------------------|
| Display | VGA LCD Display (8.4" color or 8.2" monochrome) | |
| Mass Storage | Up to 125 traces internal storage. Over 65,000 traces with optional hard drive. Up to 180 traces for a standard 3.5 inch, 1.44 MB floppy disk. Floppy disk drive comes standard | |
| Stored Data Points | up to 16,000 | |
| Group Refractive Index Setting | 1.400000 - 1.699999 | |
| Loss Modes | ORL, 2-point, 2-point LSA, dB/KM, dB/KM LSA, splice, reflectance | |
| Trace Compare Modes | Overlay, Delta Trace Compare, Align | |
| Data Acquisition | Real Time, Fast Scan, Medium Scan, Slow Scan, Timed Average (user selectable) | |
| Information Output | Trace display, FAS event table, integrated trace display with event information window, header page, measurement parameters, ASCII report | |
| Analysis | High speed integrated fiber analysis | |
| Vertical Scale Settings | 0.125/0.25/0.5/1/2/4/8 dB (module dependent) | |
| Horizontal Scale Settings | 0.001 km/div. to 0.448 km/div @ 2 km; 0.001 km/div. to 57.304 km/div. @ 256 km (IOR = 1.5) | |
| I/O Ports | Standard: Integral alpha-numeric keyboard, (2) RS-232 Serial, (1) Parallel, VGA, Mouse, External Keyboard Port | |
| Language Capability | English standard (others per request and may require hard drive option) | |
| Physical Dimensions & Weight | 9.5" H x 13.5" W x 3.75" D (24.1 x 34.3 x 9.5 cm) / 11.0 lbs. (4.9 kg) Includes mainframe, battery and one module | |
| Power | | |
| Power Supply | Autoswitching 92-132 VAC, 47-63 Hz [weight 1.7 lbs. (.77 kg)] 184-264 VAC, 47-63 Hz | |
| Battery | Sealed Lead Acid Battery Pack [weight 1.4 lbs (0.63 kg)] | |
| Battery Life | up to 9 hours maximum per battery, depending on operating mode | |
| Recharge Time | 1.5 - 2 hours | |
| Environmental | | |
| Operation: | AC Power | Battery |
| Temperature | 0°C to 45°C (32°F to 122°F) | 0°C to 40°C (32°F to 104°F) |
| Humidity | 95% RH max., non-condensing | 95% RH max., non-condensing |
| Maximum Altitude | 50,000 feet | 50,000 feet |
| Storage: | | |
| Temperature | -25°C to 60°C (-13°F to 140°F) | |
| Humidity | 95% RH max., non-condensing | |
| Maximum Altitude | 50,000 feet | |

Optical Module Specifications [All measurements made using FC/SPC connectors at 25°C (77°F)]

| Models | 4415 | 4414 | 4413 |
|--|---|------------------------------|------------------------------|
| Center Wavelength | 1310 nm ± 20 nm 1550 nm ± 30 nm | 1550 nm ± 30 nm | 1310 nm ± 20 nm |
| Fiber Type | Singlemode 9/125μ | Singlemode 9/125μ | Singlemode 9/125μ |
| Spectral Width (RMS) | 1310 nm: 10 nm 1550 nm: 10 nm | 1550 nm: 10 nm | 1310 nm: 10 nm |
| Dynamic Range ¹ (SNR = 1) | 1310 nm: 30 dB 1550 nm: 28 dB | 1550 nm: 28 dB | 1310 nm: 30 dB |
| Initial Reflective Deadzone ² | 1310 nm: 3 meters (typical) 1550 nm: 3 meters (typical) | 1550 nm: 3 meters (typical) | 1310 nm: 3 meters (typical) |
| Initial Non-Reflective Deadzone ² | 1310 nm: 10 meters (typical) 1550 nm: 12 meters (typical) | 1550 nm: 12 meters (typical) | 1310 nm: 10 meters (typical) |
| Pulsewidth | 10 ns to 10μs | | |
| Distance Resolution | 0.0001 km; 0.1 meters; 0.001 kft, 1 ft, 0.0001 mi | | |
| Distance Sampling | 0.25, 0.5, 1, 2, 4, 8, 16 meters (range dependent) | | |
| Distance Accuracy | 0.0025% of distance measurement ± distance resolution ± index uncertainty | | |
| Distance Range Setting | 2/4/8/16/32/64/128/256 km | | |
| Loss Resolution | 0.001 dB | | |
| Laser Safety | Meets CDRH Class 1 Requirements (Eye Safe) 21 CFR | | |

| Models | 4425 | 4424 | 4423 |
|--|---|------------------------------|------------------------------|
| Center Wavelength | 1310 nm ± 20 nm 1550 nm ± 20 nm | 1550 nm ± 20 nm | 1310 nm ± 20 nm |
| Fiber Type | Singlemode 9/125μ | Singlemode 9/125μ | Singlemode 9/125μ |
| Spectral Width (RMS) | 1310 nm: 10 nm 1550 nm: 10 nm | 1550 nm: 10 nm | 1310 nm: 10 nm |
| Dynamic Range ¹ (SNR = 1) | 1310 nm: 36 dB 1550 nm: 34 dB | 1550 nm: 34 dB | 1310 nm: 36 dB |
| Initial Reflective Deadzone ² | 1310 nm: 3 meters (typical) 1550 nm: 3 meters (typical) | 1550 nm: 3 meters (typical) | 1310 nm: 3 meters (typical) |
| Initial Non-Reflective Deadzone ² | 1310 nm: 10 meters (typical) 1550 nm: 12 meters (typical) | 1550 nm: 12 meters (typical) | 1310 nm: 10 meters (typical) |
| Pulsewidth | 10 ns to 10μs | | |
| Distance Resolution | 0.0001 km; 0.1 meters; 0.001 kft, 1 ft, 0.0001 mi | | |
| Distance Sampling | 0.25, 0.5, 1, 2, 4, 8, 16 meters (range dependent) | | |
| Distance Accuracy | 0.0025% of distance measurement ± distance resolution ± index uncertainty | | |
| Distance Range Setting | 2/4/8/16/32/64/128/256 km | | |
| Loss Resolution | 0.001 dB | | |
| Laser Safety | Meets CDRH Class 1 Requirements (Eye Safe) 21 CFR | | |

| Models | 4438 | 4436 | 4534 |
|--|---|--|-------------------------------|
| Center Wavelength | 1550 nm ± 20 nm | 1310 nm ± 20 nm 1550 nm ± 20 nm | 1550 nm ± 20 nm |
| Fiber Type | Singlemode | Singlemode 9/125μ | Singlemode 9/125μ |
| Spectral Width (RMS) | 15 nm | 1310 nm: 10 nm 1550 nm: 10 nm | 1550 nm: 10 nm |
| Dynamic Range ¹ (SNR = 1) | 46.0 dB | 1310 nm: 40 dB 1550 nm: 40 dB | 1550 nm: 40 dB |
| Initial Reflective Deadzone ² | 3 meters | 1310 nm: 3.5 meters (typical) 1550 nm: 3.5 meters (typical) | 1550 nm: 3.5 meters (typical) |
| Initial Non-Reflective Deadzone ² | 5 meters | 1310 nm: 6 meters (typical) 1550 nm: 6 meters (typical) | 1550 nm: 6 meters (typical) |
| Pulsewidth | 10 ns to 20μs (wavelength dependent) | | |
| Distance Resolution | 0.0001 km; 0.1 meters; 0.001 kft, 1 ft, 0.001 mi | | |
| Distance Sampling | 0.25, 0.5, 1, 2, 4, 8, 16 meters (range dependent) | | |
| Distance Accuracy | 0.0025% of distance measurement ± distance resolution ± index uncertainty | | |
| Distance Range Setting | 2/4/8/16/32/64/128/256 km | | |
| Loss Resolution | 0.001 dB | | |
| Laser Safety | Meets CDRH Class 1 Requirements (Eye Safe) 21 CFR | | |

Notes:

1. Subtract approximately 2 dB of range to 98% peak noise. Bellcore TR-TSY-000196 Issue 2
2. Using Bellcore TR-TSY-000196 Issue 2. Deadzones measured on -45 dB reflections.

| Models | 4442 | 4441 | 4440 |
|--|---|-----------------------------|------------------------------|
| Center Wavelength | 850 nm ± 20 nm 1300 nm ± 20 nm | 1300 nm ± 20 nm | 850 nm ± 20 nm |
| Fiber Type | Multimode | Multimode | Multimode |
| Spectral Width (RMS) | 850 nm: 10 nm 1300 nm: 10 nm | 1300 nm: 10 nm | 850 nm: 10 nm |
| Dynamic Range ¹ (SNR = 1) | 850 nm: 23 dB 1300 nm: 26 dB | 1300 nm: 26 dB | 850 nm: 23 dB |
| Initial Reflective Deadzone ² | 850 nm: 3.5 meters (typical) 1300 nm: 3 meters (typical) | 1300 nm: 3 meters (typical) | 850 nm: 3.5 meters (typical) |
| Initial Non-Reflective Deadzone ² | 850 nm: 6.5 meters (typical) 1300 nm: 7 meters (typical) | 1300 nm: 7 meters (typical) | 850 nm: 6.5 meters (typical) |
| Pulsewidth | 4 ns to 1µs (wavelength dependent) | | |
| Distance Resolution | 0.0001 km; 0.1 meters; 0.001 kft, 1 ft, 0.0001 mi | | |
| Distance Sampling | 0.25, 0.5, 1, 2, 4, 8 meters (range dependent) | | |
| Distance Accuracy | 0.0025% of distance measurement ± distance resolution ± index uncertainty | | |
| Distance Range Setting | 2/4/8/16/32/64 km | | |
| Loss Resolution | 0.001 dB | | |
| Laser Safety | Meets CDRH Class 1 Requirements (Eye Safe) 21 CFR | | |

| Models | 4456 | 4457 |
|--|---|---|
| Center Wavelength | 850 nm ± 20 nm 1300 nm ± 20 nm 1310 nm ± 20 nm 1550 nm ± 20 nm | 850 nm ± 20 nm 1300 nm ± 20 nm 1310 nm ± 20 nm 1550 nm ± 30 nm |
| Fiber Type | Multimode and Singlemode | Multimode and Singlemode |
| Spectral Width (RMS) | 850 nm: 10 nm 1300 nm: 10 nm 1310 nm: 10 nm 1550 nm: 10 nm | 850 nm: 10 nm 1300 nm: 10 nm 1310 nm: 10 nm 1550 nm: 10 nm |
| Dynamic Range ¹ (SNR = 1) | 850 nm: 23 dB 1300 nm: 26 dB 1310 nm: 21.5 dB 1550 nm: 21 dB | 850 nm: 21 dB 1300 nm: 24 dB 1310 nm: 32 dB 1550 nm: 30 dB |
| Initial Reflective Deadzone ² | 850 nm: 3.5 meters (typical) 1300 nm: 2.5 meters (typical) 1310 nm: 3 meters (typical) 1550 nm: 3 meters (typical) | 850 nm: 3.5 meters (typical) 1300 nm: 2.5 meters (typical) 1310 nm: 3 meters (typical) 1550 nm: 3 meters (typical) |
| Initial Non-Reflective Deadzone ² | 850 nm: 6.5 meters (typical) 1300 nm: 7 meters (typical) 1310 nm: 10 meters (typical) 1550 nm: 12 meters (typical) | 850 nm: 6.5 meters (typical) 1300 nm: 7 meters (typical) 1310 nm: 15 meters (typical) 1550 nm: 20 meters (typical) |
| Pulsewidth | 4 ns to 10 µs (wavelength dependent) | |
| Distance Resolution | 0.0001 km; 0.1 meters; 0.001 kft, 1 ft, 0.0001 mi | |
| Distance Sampling | 0.25, 0.5, 1, 2, 4, 8, 16 meters (range dependent) | |
| Distance Accuracy | 0.0025% of distance measurement ± distance resolution ± index uncertainty | |
| Distance Range Setting | 2/4/8/16/32/64/128/256 km (wavelength dependent) | |
| Loss Resolution | 0.001 dB | |
| Laser Safety | Meets CDRH Class 1 Requirements (Eye Safe) 21 CFR | |

Notes:

1. Subtract approximately 2 dB of range to 98% peak noise. Bellcore TR-TSY-000196 Issue 2
2. Using Bellcore TR-TSY-000196 Issue 2. Deadzones measured on -45 dB reflections.

| Models | 4461 | 4462 |
|--|---|---|
| Center Wavelength | 1240 nm ± 6 nm | 1240 nm ± 6 nm 1310 nm ± 20 nm |
| Fiber Type | Singlemode | Singlemode |
| Spectral Width (RMS) | 1240 nm: 15 nm | 1240 nm: 15 nm 1310 nm: 15 nm |
| Dynamic Range ¹ (SNR = 1) | 1240 nm: 36 dB | 1240 nm: 34 dB 1310 nm: 34 dB |
| Initial Reflective Deadzone ² | 1240 nm: 3 meters (typical) | 1240 nm: 3 meters (typical) 1310 nm: 3 meters (typical) |
| Initial Non-Reflective Deadzone ² | 1240 nm: 10 meters (typical) | 1240 nm: 10 meters (typical) 1310 nm: 10 meters (typical) |
| Pulsewidth | | |
| Distance Resolution | 0.0001 km; 0.1 meters; 0.001 kft, 1 ft, 0.0001 mi | 0.0001 km; 0.1 meters; 0.001 kft, 1 ft, 0.0001 mi |
| Distance Sampling | 0.25, 0.5, 1, 2, 4, 8, 16 meters (range dependent) | 0.25, 0.5, 1, 2, 4, 8, 16 meters (range dependent) |
| Distance Accuracy | 0.0025% of distance measurement ± distance resolution ± index uncertainty | 0.0025% of distance measurement ± distance resolution ± index uncertainty |
| Distance Range Setting | 2/4/8/16/32/64/128/256 km | 2/4/8/16/32/64/128/256 km |
| Loss Resolution | 0.001 dB | 0.001 dB |
| Laser Safety | Meets CDRH Class 1 Requirements (Eye Safe) 21 CFR | Meets CDRH Class 1 Requirements (Eye Safe) 21 CFR |

| Models | 4463 | 4464 |
|--|---|---|
| Center Wavelength | 1240 nm ± 6 nm 1550 nm ± 20 nm | 1240 nm ± 6 nm 1625 nm ± 10 nm |
| Fiber Type | Singlemode | Singlemode |
| Spectral Width (RMS) | 1240 nm: 15 nm 1550 nm: 15 nm | 1240 nm: 15 nm 1625 nm: 15 nm |
| Dynamic Range ¹ (SNR = 1) | 1240 nm: 36 dB 1550 nm: 34 dB | 1240 nm: 36 dB 1625 nm: 36 dB |
| Initial Reflective Deadzone ² | 1240 nm: 3 meters (typical) 1550 nm: 3 meters (typical) | 1240 nm: 3 meters (typical) 1625 nm: 3.5 meters (typical) |
| Initial Non-Reflective Deadzone ² | 1240 nm: 10 meters (typical) 1550 nm: 12 meters (typical) | 1240 nm: 10 meters (typical) 1625 nm: 15 meters (typical) |
| Pulsewidth | | |
| Distance Resolution | 0.0001 km; 0.1 meters; 0.001 kft, 1 ft, 0.0001 mi | 0.0001 km; 0.1 meters; 0.001 kft, 1 ft, 0.0001 mi |
| Distance Sampling | 0.25, 0.5, 1, 2, 4, 8, 16 meters (range dependent) | 0.25, 0.5, 1, 2, 4, 8, 16 meters (range dependent) |
| Distance Accuracy | 0.0025% of distance measurement ± distance resolution ± index uncertainty | 0.0025% of distance measurement ± distance resolution ± index uncertainty |
| Distance Range Setting | 2/4/8/16/32/64/128/256 km | 2/4/8/16/32/64/128/256 km |
| Loss Resolution | 0.001 dB | 0.001 dB |
| Laser Safety | Meets CDRH Class 1 Requirements (Eye Safe) 21 CFR | Meets CDRH Class 1 Requirements (Eye Safe) 21 CFR |

| Models | 4471 | 4472 |
|--|---|---|
| Center Wavelength | 1625 nm ± 10 nm | 1310 nm ± 20 nm 1625 nm ± 10 nm |
| Fiber Type | Singlemode | Singlemode |
| Spectral Width (RMS) | 1625 nm: 10 nm | 1310 nm: 10 nm 1625 nm: 10 nm |
| Dynamic Range ¹ (SNR = 1) | 1625 nm: 36 dB | 1310 nm: 36 dB 1625 nm: 36 dB |
| Initial Reflective Deadzone ² | 1625 nm: 4 meters (typical) | 1310 nm: 3 meters (typical) 1625 nm: 4 meters (typical) |
| Initial Non-Reflective Deadzone ² | 1625 nm: 12 meters (typical) | 1310 nm: 10 meters (typical) 1625 nm: 12 meters (typical) |
| Pulsewidth | | |
| Distance Resolution | 0.0001 km; 0.1 meters; 0.001 kft, 1 ft, 0.0001 mi | 0.0001 km; 0.1 meters; 0.001 kft, 1 ft, 0.0001 mi |
| Distance Sampling | 0.25, 0.5, 1, 2, 4, 8, 16 meters (range dependent) | 0.25, 0.5, 1, 2, 4, 8, 16 meters (range dependent) |
| Distance Accuracy | 0.0025% of distance measurement ± distance resolution ± index uncertainty | 0.0025% of distance measurement ± distance resolution ± index uncertainty |
| Distance Range Setting | 2/4/8/16/32/64/128/256 km | 2/4/8/16/32/64/128/256 km |
| Loss Resolution | 0.001 dB | 0.001 dB |
| Laser Safety | Meets CDRH Class 1 Requirements (Eye Safe) 21 CFR | Meets CDRH Class 1 Requirements (Eye Safe) 21 CFR |

| Models | 4473 |
|--|---|
| Center Wavelength | 1550 nm ± 20 nm 1625 nm ± 10 nm |
| Fiber Type | Singlemode |
| Spectral Width (RMS) | 1550 nm: 10 nm 1625 nm: 10 nm |
| Dynamic Range ¹ (SNR = 1) | 1550 nm: 34 dB 1625 nm: 36 dB |
| Initial Reflective Deadzone ² | 1550 nm: 4 meters (typical) 1625 nm: 4 meters (typical) |
| Initial Non-Reflective Deadzone ² | 1550 nm: 12 meters (typical) 1625 nm: 12 meters (typical) |
| Pulsewidth | |
| Distance Resolution | 0.0001 km; 0.1 meters; 0.001 kft, 1 ft, 0.0001 mi |
| Distance Sampling | 0.25, 0.5, 1, 2, 4, 8, 16 meters (range dependent) |
| Distance Accuracy | 0.0025% of distance measurement ± distance resolution ± index uncertainty |
| Distance Range Setting | 2/4/8/16/32/64/128/256 km |
| Loss Resolution | 0.001 dB |
| Laser Safety | Meets CDRH Class 1 Requirements (Eye Safe) 21 CFR |

Notes:

1. Subtract approximately 2 dB of range to 98% peak noise. Bellcore TR-TSY-000196 Issue 2
2. Using Bellcore TR-TSY-000196 Issue 2. Deadzones measured on -45 dB reflections.

Multi-Test Functions

Dual Source (441X and 442X optics only; factory installed)

| | |
|--------------------|---|
| Wavelength | 1310/1550 ± 20 nm (except 4457 module 1550 ± 30 nm) |
| Output | -10 dBm (typical) |
| Transmission Mode | CW, 1 KHz and 2 KHz |
| Output Fiber | 9/125µm SM fiber |
| Optical Connector | Same as OTDR |
| Modes of Operation | CW, 1 KHz and 2 KHz |
| Stability | ± 0.2 dB (8 hours) |
| Spectral Width | Same as OTDR |
| Safety | Same as OTDR |

Optical Meter (factory installed)

| | |
|------------------------|---|
| Detector Type | 2 mm Ge PIN photodiode |
| Wavelength | 800 - 1800 nm |
| Range | +10 to -55 dBm or +20 to -45 dBm with AM460 filter |
| Calibrated Wavelengths | 3 total: 850, 1310, 1550 |
| Universal Connector | Yes (use AM-430-xx adapter caps) |
| Resolution | 0.01 dB, dBm, 0.01% Watts |
| Store Reference Mode | Yes |
| Accuracy ¹ | ± 4% (± 0.18 dB) @ +5 dBm to -50 dBm ± 8% (± 0.36 dB) @ + 10 dBm to +5 dBm and @ -50 dBm to -55 dBm |
| Linearity | ± 0.04 dB, +5 dBm to -50 dBm |

Visual Fault Locator (field installed)

| | |
|-------------------|---|
| Wavelength | 635 ± 10 nm |
| Output | 0 dBm |
| Transmission Mode | CW or 2 Hz |
| Output Fiber | 9/125µm, SM fiber |
| Optical Connector | FC, SC, ST - fixed connector |
| Safety | IEC 825 Class 2, FDA (21 CFR 1040.10 class 2) |

Note:

1. Specification applies to +10 dBm meter not to +20 dBm meter.

CMA4000 Optional Accessories (must be added as separate line item):

| | | | |
|----------|----------------------------------|----------|--------------------------------------|
| TD-400 | Hard transit case | TD-459US | US style keyboard |
| TD-410 | Deluxe soft case | TD-459GE | German CE style keyboard |
| TD-415 | Soft carry bag | TD-459FR | French CE style keyboard |
| TD-405 | Printer w/cable | TD-459SP | Spanish CE style keyboard |
| TD-309 | Printer paper (5 rolls/pack) | TD-459IT | Italian CE style keyboard |
| TD-409 | Case of paper (5 packs/case) | TD-30163 | Additional User's Manual |
| TD-453 | 12 v lead acid battery | TD-30162 | Additional Training Manual |
| TD-29621 | 12 v DC power adapter | TD-30711 | Parallel cable - DB25M to DB25M |
| TD-30710 | Serial cable DB9F to DB9F (null) | TD-30712 | Serial cable DB9F to DB9M (straight) |

CMA4000 Mainframe:

Control Unit: P/N TD-14XXX PC-based modular platform

Standard Accessories:

- 8-inch VGA LCD display
- Multi-tasking operating system
- User's & Training Manuals
- 1 VGA port
- Internal memory (up to 140 traces)
- 1 carry strap
- AC adapter/charger
- AC line cord (choose style - see below)
- 2 serial ports
- 1 parallel port
- 1 mouse port
- 1 PS/2 keyboard port
- 12 v rechargeable battery (qty 2)
- Floppy drive
- Built-in keyboard

AC Power Cord Options:

| | | | |
|----------|--------------------|----------|-----------------------|
| TD-11685 | US power cord | TD-30362 | Australian power cord |
| TD-30358 | Euro power cord | TD-30359 | UK power cord |
| TD-30361 | Italian power cord | TD-30360 | Swiss power cord |

OTDR/Source Connector Adapter:

Adapters for PC and Ultra Polish:


| | | | |
|-----------|-----------|-----------|---------------------|
| UC-130-10 | Biconic | UC-130-35 | SMA 905/906 |
| UC-130-15 | DIN 47256 | UC-130-40 | Diamond HP HMS-10 |
| UC-130-20 | D4 | UC-130-45 | Diamond HP HMS-0 |
| UC-130-25 | FC | UC-130-50 | Diamond HP-HMS-10/A |
| UC-130-30 | ST | UC-130-55 | SC |

Adapters for Angle Polish:

| | | | |
|------------|----------------|-----------|----------------|
| UC-130-60 | FC NTT | UC-130-70 | DIN/HRL-10 |
| UC-130-60A | FC Seiko Giken | UC-130-75 | ST |
| UC-130-65 | SC | UC-130-80 | Diamond E-2000 |

Meter Connector Adapter (select one when ordering power meter):

| | | | |
|-----------|---------------|------------|---------|
| AM-430-10 | Biconic | AM-430-50 | ST |
| AM-430-15 | D4 | AM-430-75 | VFO/PFO |
| AM-430-20 | SMA 906 | AM-430-85 | DIN |
| AM-430-25 | Diamond GFS-3 | AM-430-90 | SC |
| AM-430-45 | FC | AM-430-100 | FDDI |

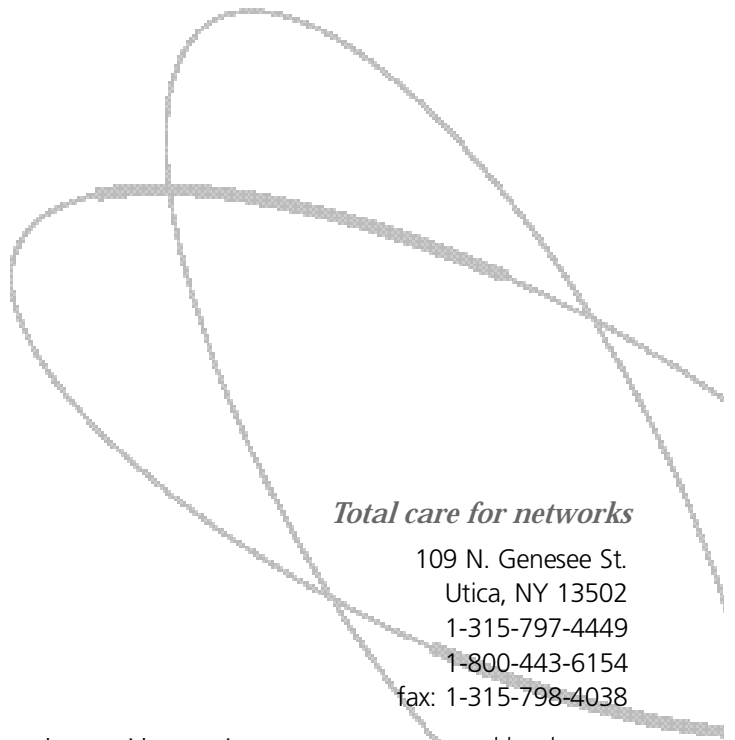

Total care for networks

109 N. Genesee St.
Utica, NY 13502
1-315-797-4449
1-800-443-6154
fax: 1-315-798-4038



Our equipment is constantly being improved. Hence, specifications are subject to change without notice.

www.dnnettest.com