



ABN 43 064 478 842

➤ 231 osborne avenue clayton south, vic 3169
PO box 1548, clayton south, vic 3169
t 03 9265 7400 f 03 9558 0875
freecall 1800 680 680
www.tmgtestequipment.com.au

Test & Measurement

- sales
- rentals
- calibration
- repair
- disposal

Complimentary Reference Material

This PDF has been made available as a complimentary service for you to assist in evaluating this model for your testing requirements.

TMG offers a wide range of test equipment solutions, from renting short to long term, buying refurbished and purchasing new. Financing options, such as Financial Rental, and Leasing are also available on application.

TMG will assist if you are unsure whether this model will suit your requirements.

Call TMG if you need to organise repair and/or calibrate your unit.


If you click on the “Click-to-Call” logo below, you can call us for FREE!

TMG Corporate Website

TMG Products Website



Click-to-Call
TMG Now

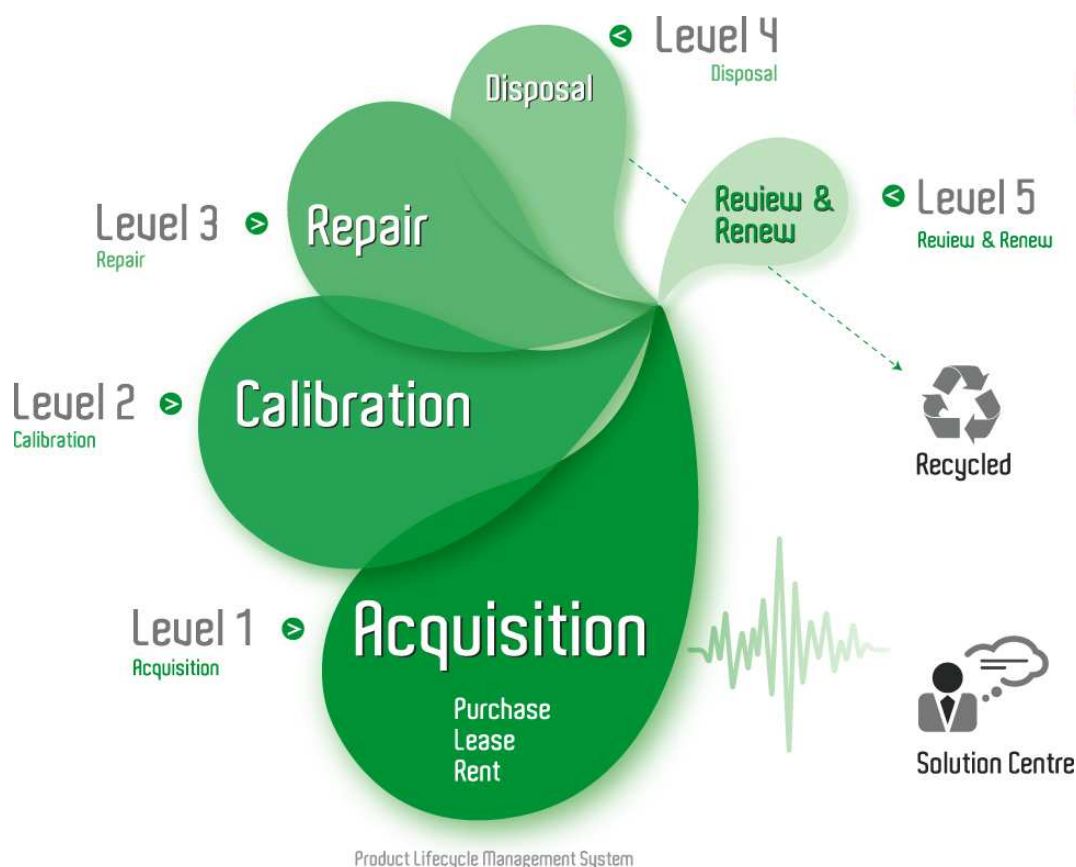

Disclaimer:

All trademarks appearing within this PDF are trademarks of their respective owners.



247000 Series

Digital Low Resistance Ohmmeters



- Resolution to 0.1 $\mu\Omega$ on 599.9 $\mu\Omega$ range
- Standard accuracy of $\pm 0.25\%$
- Digital readout

DESCRIPTION

Digital Low Resistance Ohmmeters (DLRO®) are a family of highly accurate instruments that provide a simple, practical and reliable means of making low-resistance tests in the field. They also are ideal for production quality control.

They operate on the four-wire measurement principle, thus eliminating lead and contact resistances. With basic accuracies of $\pm 0.25\%$ and resolution down to 0.1 $\mu\Omega$, they are nonetheless designed to be rugged and portable for use at the job site. A variety of optional test leads and calibration resistance standards are offered for use with DLROs.

APPLICATIONS

Operation is simple: just connect the leads, turn the instrument on and read the measurement directly from the digital LED display. No warm-up is required.

Typical applications include measuring the resistance of:

- Switch and circuit breaker contacts
- Transformers and generators
- Motor windings
- Busbar and other joints
- Aircraft, rail and pipe bonds
- Cable splices, welds and fuses
- Metal alloys
- Graphite electrodes and other composites
- Wire and cable

General-Purpose DLROs

Two models specially designed for general-purpose testing applications are available.

Each provides up to 10 amperes of test current for measuring resistances to 60 ohms with 1 $\mu\Omega$ resolution and $\pm 0.25\%$ accuracy.

Dual-Pak General-Purpose Model, Cat No. 247000

This battery-powered unit features separate measuring and charger modules for maximum portability. The charger can be left in the shop, and the measuring module taken to the job site.

It weighs less than 8 pounds (3.6 kg) and provides hours of testing.

Single-Pak General-Purpose Model, Cat. No. 247001

This compact instrument packages measuring circuits, rechargeable batteries and charger in one self-contained unit.

Ruggedly built to handle the most demanding field applications, the Single-Pak is housed in a tough Noryl® case with hinged, removable lid and carrying handle. This model also includes captive wing nuts.

Single-Pak/Low-Range Model

Cat. No. 247002

This model provides an extra range, 0 to 599.9 $\mu\Omega$, for applications requiring 0.1 $\mu\Omega$ resolution. It also features a current-reversing switch to average out any voltage offset in the test sample. Captive wing nuts are also standard.



The Low-Range DLRO, Cat. No. 247002, features an extra range and rugged, Single-Pak design.

Low-Range/High-Current Models

Cat. No. 247100 and 247101

These instruments are used when a continuous test current of 100 amperes is required. These models include a separate 100 ampere current supply module with a modified standard battery-powered 10 ampere system.

These combinations provide a sixth range, 0 to 599.9 $\mu\Omega$, with the 100 ampere current.

For 100 ampere measurements, an interconnecting cable from the 100 ampere current supply module is plugged into a special receptacle on the measuring module.

When the 100 ampere range is not used, a jumper plug is inserted in place of the interconnecting cable.

This feature allows the measuring module to be used as a standard battery-powered, 10 A instrument.

Cat. No. 247100 meets ANSI C37.09, Test Procedure for AC High Voltage Circuit Breakers.

FEATURES AND BENEFITS

- Resolution as fine as 0.1 $\mu\Omega$
- Standard accuracy of $\pm 0.25\%$
- Kelvin-type, four-wire measurement eliminates errors caused by lead and contact resistances.
- Digital readout with automatic zero circuit eliminates field test inaccuracies.
- Broad line of test leads is available to simplify and enhance data collection.



Low-Range/High-Current Model Cat. No. 247101 consists of a Single-Pak DLRO, Cat. No. 247001-3, and separate 100 ampere test current supply, Cat. No. 247120. The 100 ampere supply also may be ordered as an option.

SPECIFICATIONS

Cat. No.	Model	Resistance Range	Resolution	Current	Accuracy	Power Source	Dimensions	Weight
247000	Dual-Pak	0-5.999m Ω 0-59.99m Ω 0-599.9m Ω 0-5.999 Ω 0-59.99 Ω	1 $\mu\Omega$ 10 $\mu\Omega$ 0.1m Ω 1m Ω 10m Ω	10A 1A 100mA 10mA 1mA	(0.25%rdgd + 1 lsd)	Rechargeable batteries with separate charger	8Hx9Wx8D in. (20 x 23 x 20 cm)	12.25 lb (5.6 kg)
247001	Single-Pak	0-5999 $\mu\Omega$ 0-59.99m Ω 0-599.9m Ω 0-5.999 Ω 0-59.99 Ω	1 $\mu\Omega$ 10 $\mu\Omega$ 0.1m Ω 1m Ω 10m Ω	10A 1A 100mA 10mA 1mA	(0.25%rdgd + 1 lsd)	Rechargeable batteries with internal charger	12Hx6Wx10D in. (30 x 16 x 25 cm)	12 lb (5.5 kg)
247002	Single-Pak Low Range	0-599.9 $\mu\Omega$ 0-5.999m Ω 0-59.99m Ω 0-599.9m Ω 0-5.999 Ω 0-59.99 Ω	0.1 $\mu\Omega$ 1 $\mu\Omega$ 10 $\mu\Omega$ 0.1m Ω 1m Ω 10m Ω	10A 10A 1A 100mA 10mA 1mA	(0.3%rdgd + 1 lsd)	Rechargeable batteries with internal charger	12Hx6Wx10D in. (30 x 16 x 25 cm)	12 lb (5.5 kg)
247100 247120	Low Range Power Pak	0-599.9m Ω	0.1 $\mu\Omega$	100A	(0.5%rdgd + 2 lsd)	Line Operated Supply	13Hx8Wx10D in. (33x20x25 cm)	20 lb (9.3 kg)
247101	Higher Ranges Measuring Modules 247000-3 or 247001-3	0-5.999m Ω * 0-59.99m Ω 0-599.9m Ω 0-5.999 Ω 0-59.99 Ω or 0-5999 $\mu\Omega$ *	1 $\mu\Omega$ 10 $\mu\Omega$ 0.1m Ω 1m Ω 10m Ω	10A 1A 100mA 10mA 1mA	(0.25%rdgd + 1 lsd)	Rechargeable batteries with separate charger or internal charger	Dual -Pak units 8Hx9Wx8D in. (20 x 23 x 20 cm) Single-Pak 12Hx6Wx10D in. (30 x 16 x 25 cm)	12 lb (5.5 kg)

247100 consists of 247000-3 Dual-Pak & 247120 100 ampere Power Supply
247101 consists of 247001-3 Single-Pak & 247120 100 ampere Power Supply

Test Leads

Megger DLROs require test leads, two potential and two current, to make low-resistance measurements. In addition to individual current and potential lead sets, duplex leads that combine current and potential connections in one set are offered. A variety of C-clamps, Kelvin clips, fixed-point and helical spring-point leads are available in various lengths.

Individual Test Leads

Type	Termination	Maximum Test Current	Length	CAT. NO.
Potential	Hand Spikes	N/A	7 ft (2 m)	242021-7
			18 ft (5.5 m)	242021-18
			30 ft (9 m)	242021-30
Current	Terminal Clips	10 A	7 ft (1.5 m)	242041-7
			18 ft (5.5 m)	242041-18
			30 ft (9 m)	242041-30
	Heavy-Duty Clamps	100 A***	16 ft (5 m)	242144-16
			26 ft (8 m)	242144-26

Duplex Test Leads

Termination	Maximum Test Current	Length	CAT. NO.
Helical Hand Spikes with Spring Points	20 A	7 ft (2 m)	242011-7
	10 A	18 ft (5.5 m)	242011-18
		30 ft (9 m)	242011-30
Helical Hand Spikes with Spring Points and Current Pushbutton Switch	10 A	18 ft (5.5 m)	242009-18
Heavy-Duty Fixed-Point Hand Spikes	10 A	7 ft (2 m)	242002-7
		18 ft (5.5 m)	242002-18
		30 ft (9 m)	242002-30
Replaceable Needle Points	10 A	7 ft (2 m)	242003-7
2 in. (5 cm) Heavy-Duty C-Clamps	10 A	7 ft (2 m)	242004-7
		18 ft (5.5 m)	242004-18
		30 ft (9 m)	242004-30
4 in. (10 cm) Heavy-Duty C-Clamps	100 A***	16 ft (5 m)	242104-2-16
		26 ft (8 m)	242104-2-26
0.5 in. (1.3 cm) Kelvin Clips	10 A	7 ft (2 m)	241005-7*
		7 ft (2 m)	242005-7**
1.5 in. (4 cm) Kelvin Clips	10 A	7 ft (2 m)	242006-7
		18 ft (5.5 m)	242006-18
		30 ft (9 m)	242006-30

* Gold-plated

** Silver-plated

*** With Cat. No. 247120 only



Duplex Test Lead Styles

Kelvin Clips — Feature spade lugs on outboard end and alligator clips with insulated, silver- or gold-plated jaws. Cat. No. 241005-7, 242005-7, 242006-7, 242006-18, 242006-30



Helical Spring Points

— Tips rotate and compress into the body of the probe to ensure accurate measurement. Cat. No. 242011-7, 242011-18, 242011-30, 242009-18



Heavy-Duty Fixed Points

— Economical, lightweight and built for durability. Cat. No. 242002-7, 242002-18, 242002-30



Heavy-Duty C-Clamps

— Current passes through the C-clamp and screw thread; the potential passes through a four-point anvil insulated from the clamp metal. This set of leads is available in two widths and a variety of lengths. Cat. No. 242004-7, 242004-18, 242004-30, 242104-2-16, 242104-2-26

OPTIONAL ACCESSORIES**Input Voltage Protection**

To protect the instrument when testing battery straps, this option provides input protection against accidental overvoltage up to 30 volts.

The option should not be specified when the instrument will be used to test transformers and other inductive components. This option is available on Cat. No. 247000, 247001 and 247002 only. To order, add **-11** to instrument Cat. No.

100-Ampere Adapter Plug

Cat. No. 247000 and 247001 can be ordered with an adapter plug to allow use with the 100 ampere current supply, Cat. No. 247120.


This capability is required by some standard methods of testing large switchgear. ANSI C37.09, Test Procedure for AC High Voltage Circuit Breakers, and IEC Recommendation, Publication 56-4, High Voltage

Alternating Current Circuit Breakers Cat. No. 247101, are two such standards. Cat. No. 247100 comes standard with this option. This option is not available with Cat. No. 247002. To order, add **-3** to instrument Cat. No.

Calibration Shunts

These four-terminal calibrating resistance standards feature a conservative current rating to ensure against overheating.

Each shunt provides two current terminals with knurled Allen-head cap screws and two potential terminals with slotted screw heads. Accuracy is $\pm 0.25\%$.

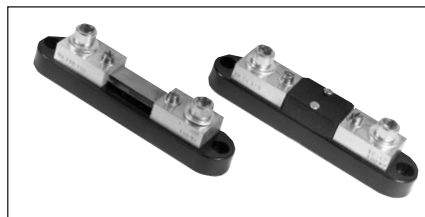**ORDERING INFORMATION**

Item (Qty)	Cat. No.	Item (Qty)	Cat. No.
DLRO® Digital Low Resistance Ohmmeters Dual-Pak, battery-operated (10A)	247000	100 A adapter plug for Cat. No. 247000 and 247001 only	Add -3
Single-Pak, battery-operated (10A)	247001	Input voltage protection for Cat. No. 247000, 247001 and 247002 only	Add -11
Single-Pak/Low-Range, battery-operated (10A)	247002	230 V (nominal), 50/60-Hz operation	Add -47
Low-Range/High-Current, line- and battery-operated (100A)	247100 or 247101	Canvas carrying case for Cat. No. 247000	35788
Included Accessories		Instrument carrying case for Cat. No. 247001, 247002	218748
Line cord, where applicable	17032	Carrying case for leads	18313
Instruction manual	AVTM24-1J	Field test shunt, 10 Ω , current rating 0.001 A	249000*
Optional Accessories		Field test shunt, 1 Ω , current rating 0.01 A	249001*
Test leads	See chart	Field test shunt, 0.1 Ω , current rating 1 A	249002*
100 ampere current supply for Cat. No. 247000-3 and 247001-3	247120	Field test shunt, 0.01 Ω , current rating 10 A	249003
		Field test shunt, 0.001 Ω , current rating 100 A	249004
		Field test shunt, 0.0001 Ω , current rating 500 A	249005
		Certificate of Calibration, NIST	CERT-NIST

*Furnished with protective shield

UK
Archcliffe Road, Dover
CT17 9EN England
T (0) 1 304 502101
F (0) 1 304 207342

UNITED STATES
4271 Bronze Way
Dallas, TX 75237-1019 USA
T 1 800 723 2861
T 1 214 333 3201
F 1 214 331 7399

OTHER TECHNICAL SALES OFFICES
Norristown USA, Toronto CANADA,
Mumbai INDIA, Trappes FRANCE,
Sydney AUSTRALIA, Madrid SPAIN
and The Kingdom of BAHRAIN.

ISO STATEMENT
Registered to ISO 9001:2000 Reg no. Q 09250
Registered to ISO 14001 Reg no. EMS 61597
DLRO247000_DS_en_V11
www.megger.com
Megger is a registered trademark