



ABN 43 064 478 842

231 Osborne Avenue Clayton South, VIC 3169  
PO Box 1548, Clayton South, VIC 3169  
t 03 9265 7400 f 03 9558 0875  
freecall 1800 680 680  
www.tmgtestequipment.com.au

## Test & Measurement

- > sales
- > rentals
- > calibration
- > repair
- > disposal

## Complimentary Reference Material

This PDF has been made available as a complimentary service for you to assist in evaluating this model for your testing requirements.

TMG offers a wide range of test equipment solutions, from renting short to long term, buying refurbished and purchasing new. Financing options, such as Financial Rental, and Leasing are also available on application.

TMG will assist if you are unsure whether this model will suit your requirements.

Call TMG if you need to organise repair and/or calibrate your unit.

If you click on the "Click-to-Call" logo below, you can call us for FREE!

TMG Corporate Website

TMG Products Website



Click-to-Call  
TMG Now



Product Lifecycle Management System

### Disclaimer:


All trademarks appearing within this PDF are trademarks of their respective owners.





## RD312 Buried Metal Cover Locator Technical Specification

<b>Description:</b>	Precision metal cover locator
<b>Part No:</b>	10/RD312
<b>Physical:</b>	
Construction	Head/Housing: High impact ABS mid black plastic for mechanical strength. Stem: 22 mm aluminium tube. Weatherproof to NEMA 3R and IP54.
Ruggedness	Withstands 1 m (3 ft) drops onto concrete.
Dimensions	78 x 25 x 10 cm (28 x 10 x 4 in).
Shipping Box Size	79 x 26 x 14 cm (31 x 10.2 x 5.5 in).
Weight	1 kg (2.2 lb).
Shipping Weight	2 kg (4.4 lb).

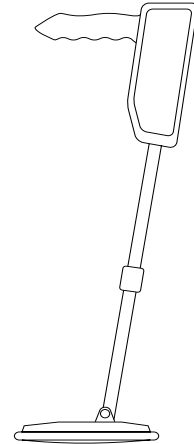

### Operating Modes:

Description	Mode
Green button	'On'/sensitivity/reset
Red button	'Off'

### Locate Range

Absolute limits of location range cannot be accurately specified. As a guide the RD312 will detect buried metal covers to the following depths:

Description	Size	Depth
Manhole cover	63 cm (25 in)	To 76 cm (30 in)
Valve box	15 cm (6 in)	To 41 cm (16 in)
Plastic valve box (locatable)	10 cm (4 in)	To 20 cm (8 in)

### Audio Indication

Varying pitch tone from loudspeaker. Highest pitch indicates maximum response over target. The use of optional headphones disables the weatherproof loudspeaker. Audio battery 'OK' indication.

### Gain Control

Maximum at switch on, can be reduced by the operator. Auto Gain Reset feature.

### Batteries

1 x 6LR61 (9 V) alkaline. 30 hours life, nominal @ 20°C (68°F) continuous use. Rechargeable option (information available).

### Operating

**Temperature Range** -15°C to +50°C (5°F to +122°F).



---

**Miscellaneous**

Options	Summer Headphones, Winter Headphones, Padded Nylon Carry Bag
Quality Control	BS5750/ISO 9001/EN29001.
EMC	☑ Complies with European EMC Directive 89/336/EEC.
Warranty	12 months.

