



ABN 43 064 478 842

➤ 231 osborne avenue clayton south, vic 3169  
PO box 1548, clayton south, vic 3169  
t 03 9265 7400 f 03 9558 0875  
freecall 1800 680 680  
www.tmgtestequipment.com.au

## Test & Measurement

- sales
- rentals
- calibration
- repair
- disposal

## Complimentary Reference Material

This PDF has been made available as a complimentary service for you to assist in evaluating this model for your testing requirements.

TMG offers a wide range of test equipment solutions, from renting short to long term, buying refurbished and purchasing new. Financing options, such as Financial Rental, and Leasing are also available on application.

TMG will assist if you are unsure whether this model will suit your requirements.

Call TMG if you need to organise repair and/or calibrate your unit.

If you click on the “Click-to-Call” logo below, you can call us for FREE!

TMG Corporate Website

TMG Products Website



Click-to-Call  
TMG Now



### Disclaimer:

All trademarks appearing within this PDF are trademarks of their respective owners.





ATSC

Version  
04.00July  
2005

## TV Test Transmitter R&S®SFL

### Digital signals for use in production

- ◆ Standard-conforming DVB and DTV signals
  - ◆ Wide output frequency range from 5 MHz to 1.1 GHz or 3.3 GHz
  - ◆ Wide output level range for transmission, receiver and components measurements
  - ◆ Operating parameters variable in a wide range
  - ◆ Internal test signals
  - ◆ Special signals and error signals for limit testing and troubleshooting
  - ◆ For use in production environments
    - Wear-free electronic attenuator
    - Fast setting times
  - ◆ Flexible input interfaces  
SPI, ASI, SMPTE310
  - ◆ Input for I/Q signals
  - ◆ Noise source for accurate C/N measurement (option R&S®SFL-N)
  - ◆ Internal bit error ratio measurement facility (option R&S®SFL-K17)
  - ◆ Sweep mode for frequency and level
  - ◆ User-defined correction tables
- Various optimized models:
- ◆ R&S®SFL-T: antenna DVB-T/H
    - 2k, 4k and 8k COFDM
    - 5 MHz, 6 MHz, 7 MHz and 8 MHz bandwidth
    - Hierarchical coding
  - ◆ R&S®SFL-V: antenna ATSC
    - 8VSB
  - ◆ R&S®SFL-I: antenna ISDB-T
    - Mode 1/2/3 (2k, 4k, 8k)
    - Max. three layers (A, B, C)
    - 13 segments (settable for each layer)
  - ◆ R&S®SFL-C: cable DVB-C
    - Selectable (16QAM/32QAM/64QAM/128QAM/256QAM)
    - Data interleaver level 1 and level 2
  - ◆ R&S®SFL-J: cable J.83/B
    - Selectable (64QAM/256QAM)
  - ◆ R&S®SFL-S: satellite DVB-S/-DSNG
    - QPSK, 8PSK, 16QAM


**ROHDE & SCHWARZ**

# A suitable model for each digital standard

## R&S®SFL-T

- ◆ For digital standard DVB-T:  
Terrestrial broadcasting via antenna  
in line with EN300744
- ◆ For digital standard DVB-H:  
Terrestrial mobile broadcasting via  
antenna in line with EN302304

## R&S®SFL-V

- ◆ For digital standard 8VSB:  
Terrestrial broadcasting via antenna  
in line with ATSC Doc. A/53 (8VSB)

## R&S®SFL-I

- ◆ For digital standard ISDB-T:  
Terrestrial broadcasting via antenna  
in line with ARIB STD-B31, V1.0

## R&S®SFL-C


- ◆ For digital standard DVB-C:  
Broadcasting via cable in line with  
ITU-T J.83/A, C and EN300429

## R&S®SFL-J

- ◆ For digital standard J.83/B:  
Broadcasting via cable in line with  
ITU-T J.83/B

## R&S®SFL-S

- ◆ For digital standards DVB-S and  
DVB-DSNG:  
Broadcasting via satellite in line  
with EN300421/EN301210

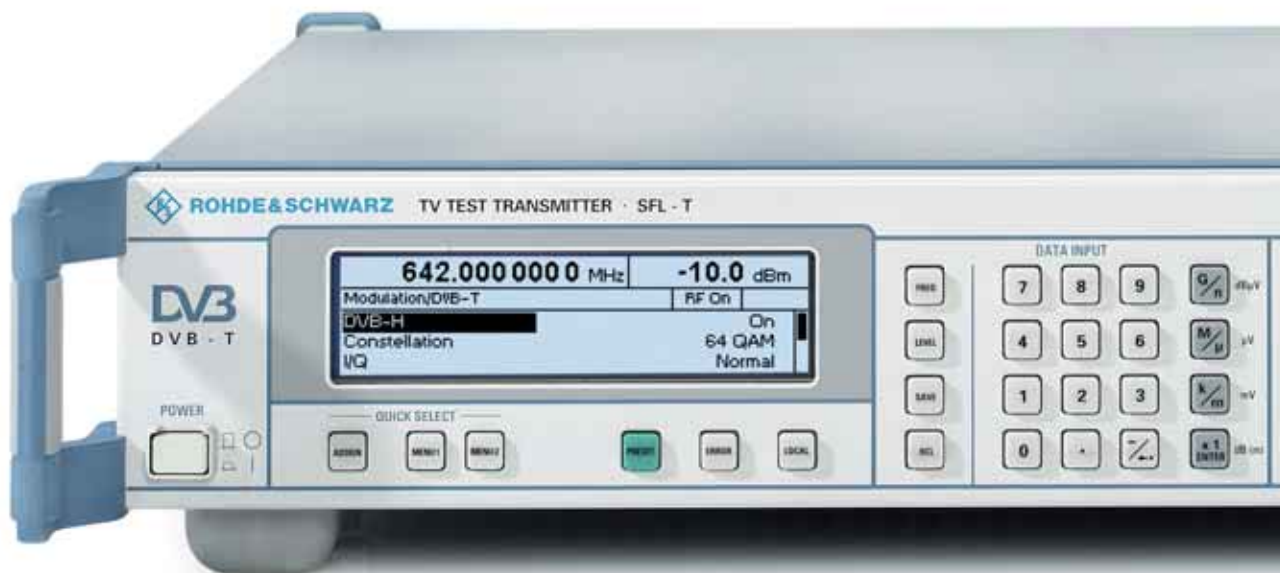

## Key features

- ◆ Wide frequency range 5 MHz to 1.1 GHz or 3.3 GHz
- ◆ Large level range –140 dBm to 0 dBm
- ◆ Wear-free electronic attenuator
- ◆ Fast setting times
- ◆ Simple, user-friendly hardkey and softkey control
- ◆ Clearly arranged display with main parameters in headline
- ◆ Storage of instrument settings
- ◆ List function for automatic command sequence, e.g. measurement of frequency and amplitude response
- ◆ Online help
- ◆ IEC 625/IEEE 488 bus, RS-232-C
- ◆ Software update via RS-232-C



## General

The TV Test Transmitter Family R&S®SFL is a complete solution for testing digital TV receivers and integrated receiver modules, as well as for testing digital TV links for broadcasting via terrestrial antennas and cable. It covers all main standards currently used worldwide as well as those to be introduced soon.


The standard-conforming test signals exhibit a high level of precision. To determine the full functionality and the performance of your products at their limits, the test signal parameters can be varied within a wide range and provided with predefined errors. Realistic transmission/reception conditions can be reproducibly simulated with the aid of the noise generator option.

## Applications

The high signal quality and the versatile parameter variation capabilities make the R&S®SFL family ideally suited as a standard signal generator for use in production environments. The wide output frequency range allows testing beyond the limits defined by the relevant standard. The benefit of the large level range is that, on the one hand, the functional limits of LSI (large-scale integration) circuits can be quickly determined and recorded during production; on the other hand, it is easy to simulate a receive link for a TV receiver.

The operating parameters (e.g. roll-off, puncturing, QPSK mode, QAM mode, pilot level, interleaver level) can easily be varied even beyond the limits defined by the relevant standard. A number of special signals or signals with predefined errors are provided in order to determine the true functional limits or to quickly detect malfunctions; it is also possible to switch off signal characteristics defined in the standard or partial signal functions (e.g. modulation, individual carriers and groups of carriers, pilot).

Irrespective of the model, a sweep mode is available for the total frequency range, as well as an external I/Q input for signals with external coding.

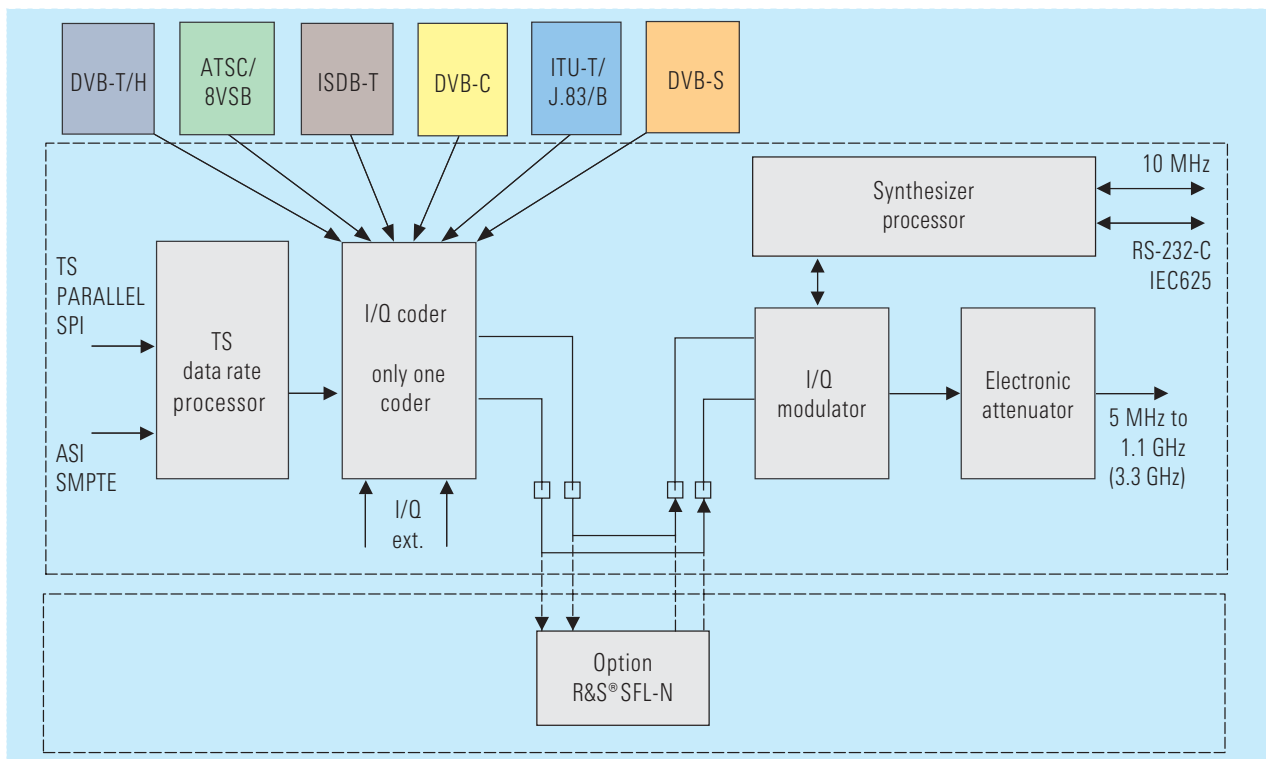

**Block diagram of the TV Test Transmitter R&S® SFL**

## R&S®SFL-T/SFL-S/SFL-C


### DVB: coding and mapping for antenna, satellite and cable

The DVB models of the TV Test Transmitter R&S®SFL encode the applied transport stream for terrestrial transmission via antenna or for satellite or cable transmission in line with standards and condition it so that I and Q (inphase and quadrature) signals are obtained. The R&S®SFL accepts MPEG-2 transport streams with a packet length of 188 or 204 bytes.

The input interfaces are synchronous parallel (TS parallel, SPI) and asynchronous serial (ASI). The input data rate and the symbol rate for the R&S®SFL-C and R&S®SFL-S are selectable. With the R&S®SFL-T, the channel bandwidths of 5 MHz, 6 MHz, 7 MHz and 8 MHz can be selected; the default settings can be varied.

Instead of the external transport data stream (DATA) being used, an internal data source can generate null transport stream packets (NULL TS PACKET, as defined in the DVB Measurement Guidelines), or an unpacketed random sequence (PRBS). The PRBS sequence is also available in packeted form in the null transport

stream packets (NULL PRBS PACKET). The R&S®SFL warns the user if the input signal fails, the set data rate does not match the incoming one or the USEFUL DATA RATE is too high.

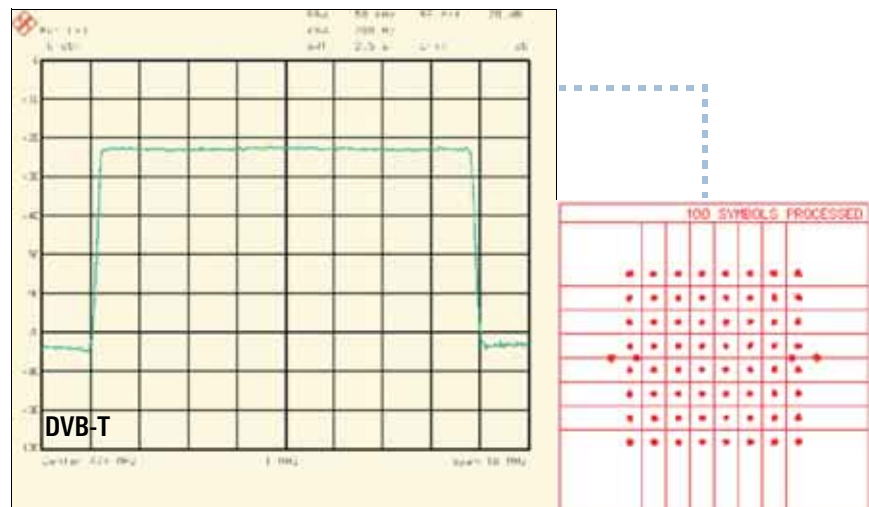

With DVB-T, hierarchical coding is also available. For this purpose, one of the two priorities is modulated with the external MPEG-2 transport stream, the other with the internal MPEG-2 signal NULL PRBS PACKET. Thus, only one external MPEG-2 transport stream is required and the two transport streams need not be synchronized. Since switching between the two priorities is easy, all simulations and measurements can be performed very quickly on both priorities, with the highly critical PRBS signal always assigned to the priority that is not currently being processed.

The input data stream is linked to a random sequence, ensuring that the signal energy is evenly distributed (energy dispersal). Energy dispersal can be switched off. The same applies to SYNC BYTE inversion. Following energy dispersal, a Reed-Solomon coder (204,188) is provided as an outer encoder for forward error correction (FEC).

Sixteen parity bytes are added to the unchanged 188 data bytes of each transport stream packet. These 16 parity bytes form the redundancy that allows eight errored bytes of a frame to be corrected by the receiver.

A convolutional interleaver distributes the data so that consecutive bits are separated. Burst errors occurring on the trans-

mission path are split up by the deinterleaver into single errors that can be corrected by the Reed-Solomon decoder. The interleaver, too, can be disabled.


Up to and including the convolutional interleaver, coding is identical for antenna (COFDM), satellite (QPSK, 8PSK, 16QAM) and cable (QAM) transmission. No further FEC coding is provided for cable transmission, as in this case interference due to noise, nonlinearities and interruptions is less likely than on satellite links or with antenna transmission. With cable transmission, mapping to the I and Q paths is performed next.

For terrestrial transmission via antenna and for satellite transmission, additional inner FEC coding is performed after the convolutional interleaver. The procedure, which is known as convolutional encoding, doubles the data rate. Puncturing is carried

out next, i.e. certain bits are left out in the transmission in accordance with a defined algorithm, so that the data rate is reduced again.

With DVB-S satellite transmission, mapping to the I and Q paths is performed at this point. Instead of the convolutional encoder (DVB-S), pragmatic trellis coding is used for DVB-DSNG satellite transmission.

For terrestrial transmission, the signal is made to pass through further FEC stages because of the inherently unfavorable propagation conditions: an inner bit interleaver (at the antenna end) and a symbol interleaver. Next, mapping is performed in accordance with the selected QPSK, 16QAM or 64QAM constellation. After insertion of the pilot and TPS (transmission parameter signaling) carriers in the frame adapter, conversion of the frequency domain to the time domain is effected by inverse fast Fourier transform, to a 1705 (2k), 3409 (4k) or 6817 (8k) carrier

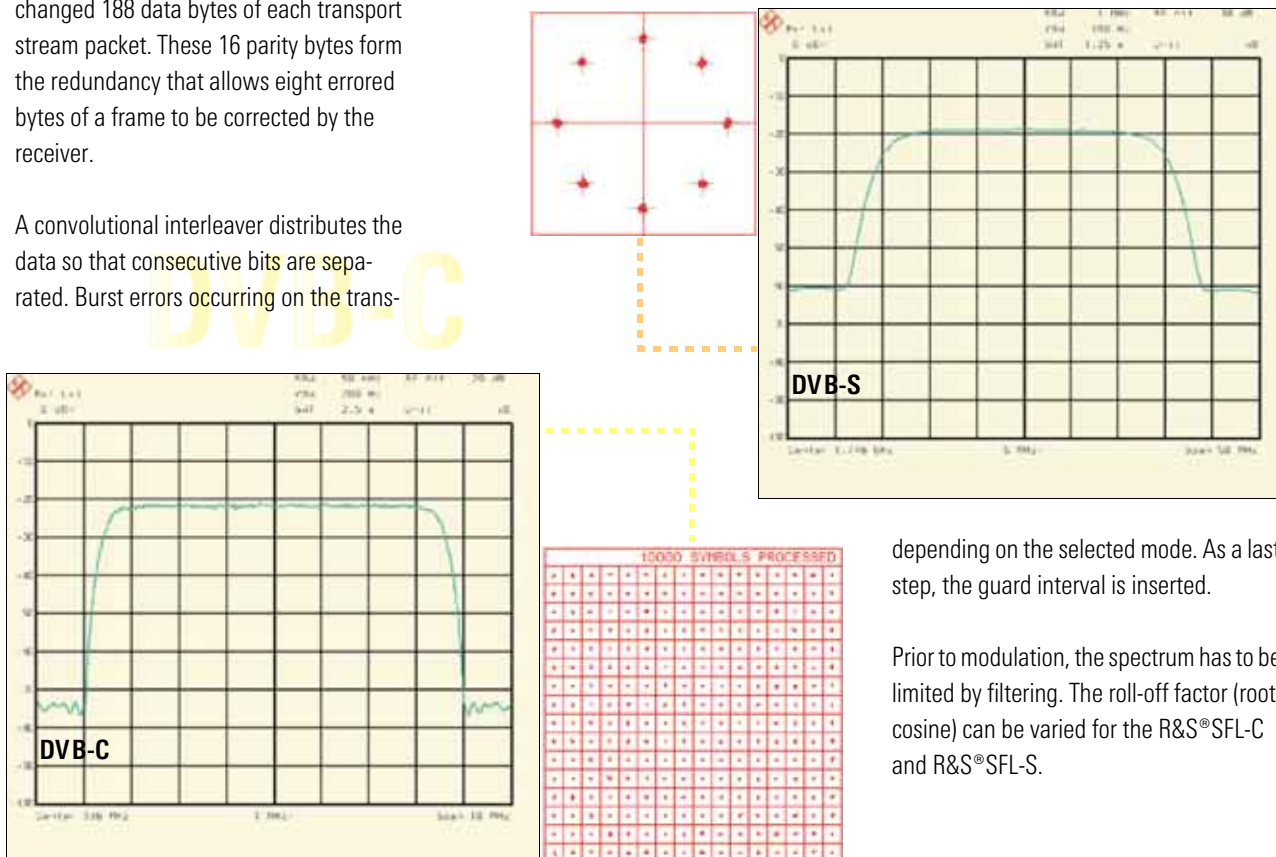

depending on the selected mode. As a last step, the guard interval is inserted.

Prior to modulation, the spectrum has to be limited by filtering. The roll-off factor (root cosine) can be varied for the R&S®SFL-C and R&S®SFL-S.

## R&S®SFL-V

### ATSC/8VSB: coding and mapping for antenna

The TV Test Transmitter R&S®SFL for 8VSB encodes the applied transport stream for terrestrial transmission via antenna in line with standards and processes it so that I and Q (inphase and quadrature) signals are obtained.

With 8VSB, the R&S®SFL accepts MPEG-2 transport streams with a packet length of 188 bytes. The input interfaces are synchronous parallel (TS parallel, SPI) and asynchronous serial (ASI and SMPTE310). When using the TS parallel input, an input data rate of 19.3926 Mbit/s  $\pm$  10% can be attained.


The R&S®SFL warns the user if the input signal fails or if the USEFUL DATA RATE is too high. Instead of the external transport stream (DATA) being applied, an internal data source can generate null transport stream packets (NULL TS PACKET, NULL PRBS PACKET). A SYNC PRBS is implemented for bit error evaluation in receivers. An unpacked random sequence

may also be selected. The PRBS sequence can be selected before (PRBS BEFORE TRELLIS) or after the trellis coder (PRBS AFTER TRELLIS). The PRBS sequence is also available in packeted form in the null transport stream packets (NULL PRBS PACKET).

Generation of the standard frame is followed by a randomizer which ensures that energy is evenly distributed in the channel (energy dispersal). The randomizer can be disabled. Following energy dispersal, a Reed-Solomon coder (208,188) is provided for forward error correction (FEC).

Twenty parity bytes are added to the unchanged 188 data bytes. Up to ten errors per segment can thus be corrected. A convolutional interleaver changes the position of the individual bytes so that consecutive bytes are separated. Burst errors occurring on the transmission path are split up by the receiver into single errors that can be corrected by the Reed-Solomon decoder. The interleaver can be disabled.

A trellis coder follows for further FEC. After the interleaver or trellis coder, the segment sync and the field sync pulses are inserted. The mapper assigns the relevant amplitude steps to the symbols. The pilot used by the receiver for synchronization is also added in the mapper. The pilot amplitude can be modified and switched off. Prior to modulation, the spectrum must be limited by appropriate filtering. The roll-off is permanently set to 0.115 (root cosine).

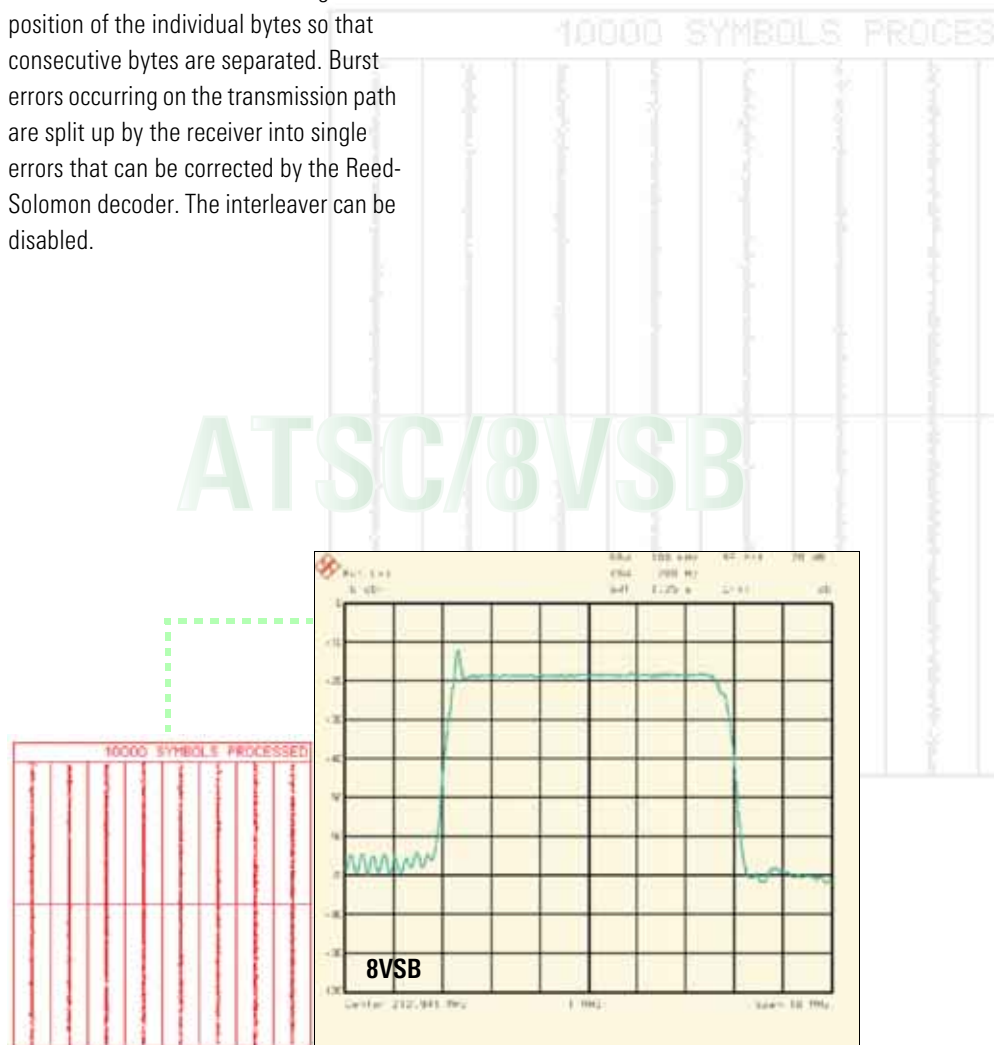

### ISDB-T: coding und mapping for antenna

The ISDB-T (terrestrial integrated services digital broadcasting) coder of the R&S®SFL encodes an MPEG-2 data stream in line with standards for transmission in the RF channel.

The transport stream first passes through the outer coder where each transport stream packet undergoes Reed-Solomon encoding. The receiver is thus able to correct up to eight erroneous bytes in one transport stream packet. The error-protected data stream then passes through a splitter which divides the transport stream packets between as many as three hierarchical layers. Next, the energy dispersal module adds a pseudo random binary sequence (PRBS) to the data stream to ensure a sufficient number of binary changes.

Depending on the two transmission parameters "modulation" and "code rate", the data stream delay in each of the three paths will be different as a result of bitwise interleaving in the transmitter and deinterleaving in the receiver. To minimize the effort required at the receiver end, delay adjustment is performed in the coder. The three data streams are delayed in such a manner that subsequent delay differences can be compensated in advance. Bitwise interleaving separates initially adjacent bytes, making the signal resistant to burst errors.

The convolutional coder with integrated puncturer adds further redundancy to the data stream to permit error correction in the receiver (Viterbi decoder). The code rate can be selected in line with the required transmission characteristics of the system.

Modulation is then performed. It includes bitwise interleaving with delay adjustment and mapping to the modulation constellation diagram. Possible constellations with ISDB-T are DQPSK, QPSK, 16QAM and 64QAM. The constellation can be selected in line with the required transmission characteristics of the system. Appropriate bitwise interleaving and delay adjustment are automatically selected.

The hierarchical data stream is then synthesized. For this purpose, the complex mapped data from each of the as many as three paths is added to form a serial data stream.

Symbol-by-symbol time interleaving follows synthesis. This is an intra-segment time interleaver whose depth can be set separately for each layer.

Delay adjustment is also performed in the time interleaver, again to compensate for different delays in the paths.

Frequency interleaving then scrambles the data within an OFDM symbol, i.e. in the frequency domain. First, an inter-segment interleaver is used between the OFDM segments that have the same modulation, followed by an intra-segment interleaver that rotates the data within a

segment. Finally, the data passes through an intra-segment randomizer that shifts the data within a segment to quasi-random positions. OFDM framing is performed next. Frames are formed from 204 OFDM symbols by adding pilot carriers. Depending on the mode and the selected modulation, pilot carriers are inserted in the data stream at different positions. Moreover, TMCC (transmission and multiplexing configuration control) carriers and auxiliary channel (AC) carriers are added. The data that has been generated now undergoes inverse fast Fourier transform (IFFT) to transfer it from the frequency domain to the time domain as is usual with OFDM modulation. The length of IFFT depends on the selected ISDB-T mode and can be 2k, 4k or 8k.

IFFT is followed by the insertion of the guard interval. This guard interval extends the OFDM symbols by a specific factor (1/4, 1/8, 1/16 or 1/32). This measure has a positive effect on the receiving characteristics of multipath propagation and mobile reception.

# ISDB-T

**ITU-T J.83/B: coding and mapping for cable**

The symbol rate of the coder and thus the output signal bandwidth can be varied in a wide range of  $\pm 10\%$  of the standard symbol rate.

Internal test sequences (NULL TS PACKETS, NULL PRBS PACKETS, SYNC PRBS) can be substituted for the applied data signal and are helpful for bit error measurements.

**Processing stages of the coder:** The coder receives an MPEG-2-coded standard-conforming input data stream with a packet length of 188 bytes.

J.83/B specifies additional error control at the transport stream level. The sync byte is replaced by the sliding checksum calculated from the content of the transport stream packets. In addition to packet synchronization, the receiver can thus detect any errors that occur.

The subsequent FEC layer processes the data without synchronization to the transport structure.

In line with J.83/B, FEC consists of four processing layers that allow reliable data transport via the cable transmission channel. These layers are:

- ◆ Reed-Solomon coding (128, 122) for outer error correction, allowing up to three symbols in one Reed-Solomon block to be corrected
- ◆ A subsequent convolutional interleaver that uniformly disperses consecutive symbols across the data stream and so protects the data stream against burst-type impairments
- ◆ A randomizer that ensures uniform power density in the channel
- ◆ Trellis coding for inner error correction, involving convolutional encoding of data and inserting of defined redundant information into the symbols

Randomizer, interleaver and Reed-Solomon coder can be disabled, which is very helpful in the development of receivers.

All the interleaver modes defined in the J.83/B specification are implemented (level 1 and level 2) and allow flexible adaptation of the system to different transmission conditions.


FEC frame generation: With 64QAM, a frame sync trailer is inserted after 60 Reed-Solomon packets to form a FEC frame (with 256QAM after 88 Reed-Solomon packets).

The frame sync trailer is used for FEC synchronization in the receiver and transmits coded information about the current interleaver configuration. The trailer is inserted immediately ahead of the trellis coder.

The trellis coder for 64QAM performs differential and convolutional encoding with subsequent puncturing ( $CR = 14/15$ ). The output symbol width of the trellis coder is 6 bits which reflects the modulation order of 64QAM.

The differential coder/convolutional encoder in the trellis block for 256QAM is of identical design, but generates an overall code rate of 19/20. The output symbol width is 8 bits, corresponding to 256 constellation points.

After the mapper and before modulation, the output spectrum is pulse-shaped and band-limited by a digital  $\sqrt{\cos}$  roll-off filter. The roll-off is 0.18 with 64QAM and 0.12 with 256QAM in line with the standard.

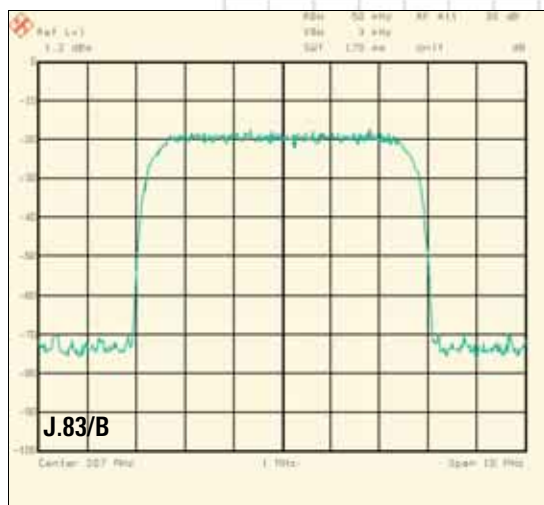

## Data inputs

The R&S®SFL has a suitable data input for every application. Via the TS PARALLEL (with LVDS format) and SMPTE310 inputs, the input signal is passed on to the coder without modification. The symbol rate directly depends on the input data rate. The SPI and ASI inputs adapt the signal prior to coding to the desired symbol rate with the aid of the stuffing function.

These inputs allow setting of the symbol rate independently of the input data rate, so that the input data rate is independent of the DVB-T/H and 8VSB channel bandwidth. To this effect, all null packets are removed. The data rate required for a specific symbol rate or bandwidth is obtained by stuffing, i.e. by inserting new

null packets. The PCR (program clock reference) values are adapted. A built-in synthesizer ensures an accurate data clock at all inputs. For synchronization to a receiver, an external clock can be applied to the ASI and SPI inputs instead of the internal clock.

## I/Q modulation

In the I/Q modulator, the orthogonal I and Q components of the RF signal are controlled in amplitude and phase by the analog I and Q signals from the coder. The two RF components are added to form an output signal that can be amplitude- and phase-modulated as required. Assignment of I and Q components can be interchanged in the R&S®SFL so that an inverted RF signal is obtained. High

demands are placed on the I/Q modulator, particularly regarding high-order quadrature amplitude modulation.

The internal calibration of the R&S®SFL ensures that the I and Q paths have identical gain, the phase is exactly 90° and carrier suppression is at least 50 dB. Non-ideal behavior of an I/Q modulator can be simulated by detuning amplitude, I/Q imbalance, phase error and carrier leakage in the R&S®SFL. As a result, bit errors are produced that allow quality assessment of receivers and demodulators.



*Rear view of the R&S®SFL*

## Noise generator (option R&S®SFL-N)

A TV test transmitter is normally used to generate signals that are as ideal as possible. With receiver tests, however, it is necessary to simulate transmit and receive conditions. For this purpose, the option R&S®SFL-N was developed.

The R&S®SFL-N option is screw-connected to the base unit and electrically connected on the rear panel.

By using a noise generator which provides additive white Gaussian noise (AWGN), the R&S®SFL output signal can be superimposed. The carrier-to-noise (C/N) ratio can be varied over a wide


range while maintaining high resolution/accuracy. Precise sensitivity measurements of receiver circuits with a defined C/N ratio are thus feasible, for example. Digital signal processing (I and Q signals) in the baseband is used to generate the AWGN signal.

High accuracy and excellent reproducibility of the measurements are thus ensured:

- ◆ Superimposed noise signal (AWGN)
- ◆ Variable C/N ratio over a very wide range
- ◆ Wide noise bandwidth (16 MHz)

## Applications

- ◆ Simulation of a noisy receive channel
- ◆ Noise simulation of a receiver input stage
- ◆ Sensitivity measurement of digital receivers to determine the BER at a defined C/N ratio

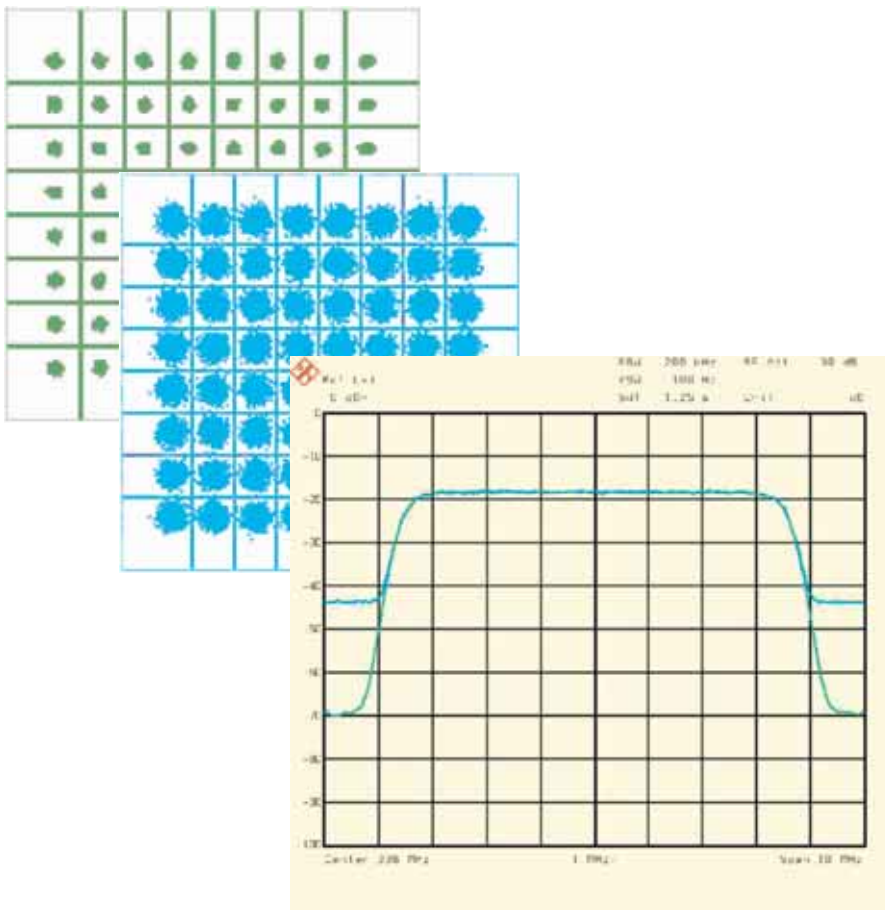

*DVB-C spectrum without and with noise (24 dB C/N), associated I/Q constellations*



*Front and rear view of base unit and option R&S®SFL-N*

## BER measurement (option R&S®SFL-K17)

The BER measurement facility permits BER measurements on receivers without any external equipment. The demodulated data streams are re-applied to the R&S®SFL.

The user can choose between the serial inputs for DATA, CLOCK (BNC connectors, TTL level, high impedance) and the parallel input for MPEG-2 signals (D-Sub connector, LVDS level). The BER measurement function does not depend on other

settings; it can be used for all models of the R&S®SFL. The display of the current BER is always visible.

A PRBS of  $2^{23}-1$  or  $2^{15}-1$  in accordance with ITU-T Rec. O.151 can be selected and evaluated. It ensures receiver synchronization and allows measurements over a very wide BER range.

A serial BER measurement can be performed after the demapper, for example. For parallel measurements on MPEG-2 transmission systems, an MPEG-2 signal is required whose null packet features a

PRBS as the payload. For this purpose, the R&S®SFL offers NULL PRBS PACKET as an MPEG-2 transport stream. It also uses this packet for stuffing. The BER measurement can thus be carried out before the Reed-Solomon decoder, for example, provided that the receiver decoder has been switched off. The BER of set-top boxes can be determined by using an adapter board for the Common Interface R&S®SFQ-Z17.

## Specifications

Specifications apply under the following conditions: 30 minutes warm-up time, specified environmental conditions met, calibration cycle adhered to and all internal adjustments performed.

| Frequency                                                            |                                                                                             |
|----------------------------------------------------------------------|---------------------------------------------------------------------------------------------|
| Range                                                                | 5 MHz to 1.1 GHz<br>R&S®SFL-S: 5 MHz to 3.3 GHz                                             |
| Resolution                                                           | 0.1 Hz                                                                                      |
| Error limits                                                         | $<1 \times 10^{-6}$                                                                         |
| Aging (after 30 days of operation)                                   | $<1 \times 10^{-6}$ /year                                                                   |
| Temperature effect (0°C to +55°C)                                    | $<1 \times 10^{-6}$                                                                         |
| Internal reference frequency output                                  | 10 MHz                                                                                      |
| Output voltage ( $V_{rms}$ , sinewave)                               | $>0.5$ V into 50 $\Omega$                                                                   |
| Output impedance                                                     | 50 $\Omega$                                                                                 |
| External reference frequency input                                   | 10 MHz                                                                                      |
| Permissible frequency drift                                          | $5 \times 10^{-6}$                                                                          |
| Input voltage ( $V_{rms}$ , sinewave)                                | 0.5 V to 2 V into 50 $\Omega$                                                               |
| Input impedance                                                      | 50 $\Omega$                                                                                 |
| Spectral purity                                                      |                                                                                             |
| Spurious signals                                                     |                                                                                             |
| Harmonics                                                            | $<-30$ dBc for levels $\leq 0$ dBm                                                          |
| Subharmonics                                                         | $<-50$ dBc                                                                                  |
| Nonharmonics                                                         |                                                                                             |
| (offset from carrier $>10$ kHz)                                      |                                                                                             |
| $f \leq 250$ MHz                                                     | $<-60$ dBc                                                                                  |
| $f > 250$ MHz to 1.1 GHz                                             | $<-70$ dBc                                                                                  |
| $f > 1.1$ GHz to 2.2 GHz                                             | $<-64$ dBc                                                                                  |
| $f > 2.2$ GHz to 3.3 GHz                                             | $<-58$ dBc                                                                                  |
| SSB phase noise                                                      |                                                                                             |
| ( $f=500$ MHz, carrier offset 20 kHz, 1 Hz bandwidth)                | $<-115$ dBc                                                                                 |
| Spurious AM                                                          | $<0.05\%$ (0.03 kHz to 20 kHz)                                                              |
| Level                                                                |                                                                                             |
| Range                                                                |                                                                                             |
| CW                                                                   | $-140$ dBm to $+7$ dBm                                                                      |
| R&S®SFL-C/R&S®SFL-T/R&S®SFL-I                                        | $-140$ dBm to 0 dBm                                                                         |
| R&S®SFL-S/R&S®SFL-V/R&S®SFL-J                                        | $-140$ dBm to $-3$ dBm                                                                      |
| Resolution                                                           | 0.1 dB                                                                                      |
| Total error for level $>-127$ dBm                                    |                                                                                             |
| (operating period $>1$ h, temperature variation $<5^\circ\text{C}$ ) | $<\pm 0.8$ dB <sup>1)</sup>                                                                 |
| Characteristic impedance                                             | 50 $\Omega$                                                                                 |
| VSWR                                                                 |                                                                                             |
| $f < 1.5$ GHz                                                        | $<1.6$                                                                                      |
| $f > 1.5$ GHz                                                        | $<2.3$                                                                                      |
| Non-interrupting level setting <sup>2)</sup>                         | 0 dB to $-20$ dB of current level                                                           |
| Overvoltage protection                                               | protects the instrument against externally fed RF power and DC voltage (50 $\Omega$ source) |
| Maximum permissible RF power                                         |                                                                                             |
| $f \leq 2.2$ GHz                                                     | 50 W                                                                                        |
| $f > 2.2$ GHz                                                        | 25 W                                                                                        |
| Maximum permissible DC voltage                                       | 35 V                                                                                        |
| I/Q modulator                                                        |                                                                                             |
| Modulation frequency response                                        |                                                                                             |
| 5 MHz to 1100 MHz                                                    |                                                                                             |
| DC to 3.5 MHz                                                        | $<\pm 0.2$ dB                                                                               |
| R&S®SFL-S: 425 MHz to 3000 MHz                                       |                                                                                             |
| DC to 5 MHz                                                          | $<\pm 0.4$ dB                                                                               |
| DC to 25 MHz                                                         | $<\pm 0.8$ dB                                                                               |
| DC to 50 MHz                                                         | $<\pm 2$ dB                                                                                 |

| Carrier leakage at 0 V input voltage, referred to nominal value | $<-50$ dBc (after I/Q calibration in CALIB menu)     |
|-----------------------------------------------------------------|------------------------------------------------------|
| Carrier suppression (residual carrier)                          |                                                      |
| Setting range                                                   | 0% to +50%                                           |
| Resolution                                                      | 0.1%                                                 |
| I/Q amplitude (imbalance)                                       |                                                      |
| Setting range                                                   | $-25\%$ to $+25\%$                                   |
| Resolution                                                      | 0.1%                                                 |
| Quadrature offset (phase error)                                 |                                                      |
| Setting range                                                   | $-10^\circ$ to $+10^\circ$                           |
| Resolution                                                      | 0.1°                                                 |
| External I/Q input                                              |                                                      |
| Modulation inputs for I and Q signals                           | front panel                                          |
| Input impedance                                                 | 50 $\Omega$                                          |
| VSWR (DC to 30 MHz)                                             | $<1.1$                                               |
| Input voltage for full-scale level                              | $(I^2 + Q^2)^{1/2} = 0.5$ V (1 V EMF, 50 $\Omega$ )  |
| Connectors                                                      | BNC female                                           |
| Data input                                                      |                                                      |
| TS PARALLEL input                                               | synchronous parallel, without stuffing (LVDS)        |
| Characteristics                                                 | meet EN 50083-9                                      |
| Input impedance                                                 | 100 $\Omega$                                         |
| Input level                                                     | 100 mV to 2 V                                        |
| Connector                                                       | 25-pin female, shielded                              |
| SPI input                                                       | synchronous parallel, with stuffing (LVDS)           |
| Characteristics                                                 | meet EN 50083-9                                      |
| Input impedance                                                 | 100 $\Omega$                                         |
| Input level ( $V_{pp}$ )                                        | 100 mV to 2 V                                        |
| Connector                                                       | 25-pin female, shielded                              |
| ASI input                                                       | asynchronous serial with stuffing                    |
| Characteristics                                                 | meet EN 50083-9                                      |
| Input impedance                                                 | 75 $\Omega$                                          |
| Input level ( $V_{pp}$ )                                        | 200 mV to 880 mV                                     |
| Connector                                                       | BNC female                                           |
| Input signal                                                    | 270 Mbit                                             |
| Stuffing bytes                                                  | single byte and block mode                           |
| SMPTE310 input                                                  | asynchronous serial (only with R&S®SFL-V)            |
| Characteristics                                                 | meet SMPTE310M                                       |
| Input impedance                                                 | 75 $\Omega$                                          |
| Input level ( $V_{pp}$ )                                        | 400 mV to 880 mV                                     |
| Connector                                                       | BNC female                                           |
| Data rate                                                       | 19.393 Mbit/s                                        |
| Symbol rate                                                     |                                                      |
| TS PARALLEL, SMPTE310                                           | directly dependent on applied MPEG-2 signal          |
| ASI, SPI                                                        | selectable independently of MPEG-2 signal (stuffing) |
| Internal data clock accuracy                                    | $<\pm 1 \times 10^{-5}$                              |
| External clock                                                  | switchable to external bit/byte synchronization      |
| Signal                                                          | squarewave                                           |
| Level                                                           | TTL                                                  |
| Input impedance                                                 | high                                                 |
| Connector                                                       | BNC female                                           |

<sup>1)</sup> ALC Off mode = sample&hold.

<sup>2)</sup> Effect on spectral purity.

## R&S®SFL-T

| <b>DVB-T/H coder</b>              |                                                                                                                                       |
|-----------------------------------|---------------------------------------------------------------------------------------------------------------------------------------|
| Characteristics                   | meet EN300744/EN 302304                                                                                                               |
| Mode                              |                                                                                                                                       |
| DATA                              | MPEG-2 input signal synchronized to input data rate                                                                                   |
| NULL TS PACKET                    | null transport stream packets as defined by DVB Measurement Guidelines                                                                |
| NULL PRBS PACKET                  | null transport stream packets with PRBS (PRBS: $2^{23}-1/2^{15}-1$ to ITU-T Rec. 0.151)                                               |
| PRBS before convolutional encoder | $2^{23}-1/2^{15}-1$ to ITU-T Rec. 0.151                                                                                               |
| PRBS after convolutional encoder  | $2^{23}-1/2^{15}-1$ to ITU-T Rec. 0.151                                                                                               |
| PRBS before mapper                | $2^{23}-1/2^{15}-1$ to ITU-T Rec. 0.151                                                                                               |
| Hierarchical coding               |                                                                                                                                       |
| MPEG-2 transport stream           | external MPEG-2 transport stream and internal NULL PRBS PACKET                                                                        |
| Priority assignment               | selectable                                                                                                                            |
| Special functions                 | scrambler, sync byte inversion, Reed-Solomon encoder, convolutional interleaver, bit interleaver, symbol interleaver; can be disabled |
| Symbol interleaver                | native/indepth                                                                                                                        |
| Time slicing                      | on/off                                                                                                                                |
| MPE-FEC                           | on/off                                                                                                                                |
| Bandwidth                         | 5 MHz, 6 MHz, 7 MHz, 8 MHz; selectable for variable bandwidth 4.75 MHz to 7.962 MHz                                                   |
| Constellation                     | QPSK, 16QAM, 64QAM                                                                                                                    |
| Code rate                         | 1/2, 2/3, 3/4, 5/6, 7/8                                                                                                               |
| Guard interval                    | 1/4, 1/8, 1/16, 1/32, OFF                                                                                                             |
| FFT mode                          | 2k, 4k and 8k OFDM                                                                                                                    |
| Carrier modification              | carriers or groups of carriers can be switched off; modulation for groups of carriers can be switched off                             |
| Modulation frequency response     | $\pm 0.2$ dB                                                                                                                          |
| Shoulder attenuation              | 48 dB                                                                                                                                 |

## R&S®SFL-V

| <b>ATSC/8VSB coder</b>        |                                                                                         |
|-------------------------------|-----------------------------------------------------------------------------------------|
| Characteristics               | meet ATSC Doc. A/53 (8VSB)                                                              |
| Mode                          |                                                                                         |
| DATA                          | MPEG-2 input signal with synchronization to input data rate                             |
| NULL TS PACKET                | null transport stream packets as defined by DVB Measurement Guidelines                  |
| NULL PRBS PACKET              | null transport stream packets with PRBS (PRBS: $2^{23}-1/2^{15}-1$ to ITU-T Rec. 0.151) |
| SYNC PRBS                     | sync byte with 187 byte PRBS payload                                                    |
| PRBS before trellis           | $2^{23}-1/2^{15}-1$ to ITU-T Rec. 0.151                                                 |
| PRBS after trellis            | $2^{23}-1/2^{15}-1$ to ITU-T Rec. 0.151                                                 |
| Symbol rate                   | 10.762 Msps                                                                             |
| Range                         | $\pm 10\%$                                                                              |
| Bandwidth                     | 6 MHz                                                                                   |
| Range                         | $\pm 10\%$                                                                              |
| Pilot addition                | can be switched off                                                                     |
| Nominal                       | 1.25 for 8VSB                                                                           |
| Range                         | 0 to 5, in steps of 0.125 for 8VSB                                                      |
| Pulse filtering (root cosine) | 0.115 roll-off                                                                          |
| Special functions             | Reed-Solomon, randomizer, interleaver; can be disabled                                  |

|                               |               |
|-------------------------------|---------------|
| Modulation frequency response | $\pm 0.25$ dB |
| Shoulder attenuation          | 53 dB         |
| MER                           | 41 dB         |

## R&S®SFL-I

| <b>ISDB-T coder</b>               |                                                                                                               |
|-----------------------------------|---------------------------------------------------------------------------------------------------------------|
| Characteristics                   | meet ARIB STD-B31, V1.0                                                                                       |
| Mode                              |                                                                                                               |
| DATA                              | PRBS: $2^{23}-1/2^{15}-1$ to ITU-T Rec. 0.151                                                                 |
| NULL TS PACKET                    | PRBS: $2^{23}-1/2^{15}-1$ to ITU-T Rec. 0.151                                                                 |
| PRBS TS PACKET                    | PRBS: $2^{23}-1/2^{15}-1$ to ITU-T Rec. 0.151                                                                 |
| PRBS before convolutional encoder | PRBS: $2^{23}-1/2^{15}-1$ to ITU-T Rec. 0.151                                                                 |
| PRBS after convolutional encoder  | PRBS: $2^{23}-1/2^{15}-1$ to ITU-T Rec. 0.151                                                                 |
| Special functions                 | scrambler, Reed-Solomon, byte interleaver, frequency interleaver, Alert Broadcasting Flag can be switched off |
| Bandwidth                         | 6 MHz                                                                                                         |
| Carriers                          | data, SP, CP, TMCC and AC carriers as well as modulation of these carriers can be switched off                |
| Segments                          | all carriers of one segment can be switched off                                                               |
| ISDB-T mode                       | mode 1 (2k), mode 2 (4k), mode 3 (8k)                                                                         |
| Number of layers                  | max. 3 (A, B, C)                                                                                              |
| Number of segments                | 13                                                                                                            |
| Constellation                     | DQPSK, QPSK, 16QAM, 64QAM                                                                                     |
| Code rate                         | 1/2, 2/3, 3/4, 5/6, 7/8                                                                                       |
| Guard interval                    | 1/4, 1/8, 1/16, 1/32, OFF                                                                                     |
| Time interleaving                 | 0, 1, 2, 4, 8, 16 (settable depth depending on ISDB-T mode)                                                   |
| AC information                    | PRBS, all "1"                                                                                                 |
| Spectrum mask                     | meets ISDB-T specifications                                                                                   |

## R&S®SFL-C

| <b>DVB-C coder</b>                |                                                                                                                  |
|-----------------------------------|------------------------------------------------------------------------------------------------------------------|
| Characteristics                   | meet EN300429, ITU-T J.83/A, C                                                                                   |
| Type of modulation                | 16QAM, 32QAM, 64QAM, 128QAM, 256QAM                                                                              |
| Symbol rates                      | 0.1 Msps to 8 Msps (selectable)                                                                                  |
| Pulse filtering                   | root cosine roll-off, $\alpha=0.15$ variable roll-off (0.1 to 0.2)                                               |
| Energy dispersal                  | can be disabled                                                                                                  |
| Reed-Solomon coder (204,188, t=8) | can be disabled                                                                                                  |
| Convolutional interleaver         | can be disabled                                                                                                  |
| Mode                              |                                                                                                                  |
| DATA                              | MPEG-2 input signal (without input signal automatic switchover to PRBS with TS PARALLEL, stuffing with ASI, SPI) |
| NULL TS PACKET                    | null packets (PID=1FFF, payload=0)                                                                               |
| NULL PRBS PACKET                  | null packets (PID=1FFF, payload=PRBS, $2^{15}-1/2^{23}-1$ to ITU-T Rec. 0.151)                                   |
| PRBS before mapper                | $2^{15}-1/2^{23}-1$ to ITU-T Rec. 0.151                                                                          |
| Modulation frequency response     | $\pm 0.25$ dB                                                                                                    |
| Shoulder attenuation (6.9 Msps)   | 48 dB                                                                                                            |
| MER                               | 41 dB                                                                                                            |

## R&S®SFL-J

| J.83/B coder                  |                                                                                         |
|-------------------------------|-----------------------------------------------------------------------------------------|
| Characteristics               | meet ITU-T J.83/B                                                                       |
| Mode                          |                                                                                         |
| DATA                          | MPEG-2 input signal with synchronization to input data rate                             |
| NULL TS PACKET                | null transport stream packets as defined by DVB Measurement Guidelines                  |
| NULL PRBS PACKET              | null transport stream packets with PRBS (PRBS: $2^{23}-1/2^{15}-1$ to ITU-T Rec. 0.151) |
| SYNC PRBS                     | sync byte with 187 byte PRBS payload (PRBS: $2^{23}-1/2^{15}-1$ to ITU-T Rec. 0.151)    |
| PRBS before trellis           | $2^{23}-1/2^{15}-1$ to ITU-T Rec. 0.151                                                 |
| PRBS after trellis            | $2^{23}-1/2^{15}-1$ to ITU-T Rec. 0.151                                                 |
| Symbol rate                   | 5.0569 Msps (64 QAM), 5.360 Msps (256 QAM)                                              |
| Range                         | ±10%                                                                                    |
| Bandwidth                     | 6 MHz                                                                                   |
| Range                         | ±10%                                                                                    |
| Pulse filtering (root cosine) | 0.18 (64 QAM), 0.12 (256 QAM)                                                           |
| Data interleaver              | level 1 and level 2; can be disabled                                                    |
| Special functions             | Reed-Solomon, randomizer, interleaver; can be disabled                                  |
| Modulation frequency response | ±0.25 dB                                                                                |
| Shoulder attenuation          | 53 dB                                                                                   |
| MER                           | 42 dB                                                                                   |

## R&S®SFL-S

| DVB-S/-DSNG coder                     |                                                                                                                  |
|---------------------------------------|------------------------------------------------------------------------------------------------------------------|
| Characteristics                       | meet EN300421/EN301210                                                                                           |
| Type of modulation                    | QPSK, 8PSK, 16QAM                                                                                                |
| Code rate                             | QPSK: 1/2, 2/3, 3/4, 5/6, 7/8<br>8PSK: 2/3, 5/6, 8/9<br>16QAM: 3/4, 7/8                                          |
| Symbol rates                          | 0.1 Msps to 80 Msps (selectable)                                                                                 |
| Pulse filtering                       | root cosine roll-off, $\alpha=0.35$<br>variable roll-off (0.25 to 0.45)                                          |
| Energy dispersal                      | can be disabled                                                                                                  |
| Reed-Solomon coder (204, 188, $t=8$ ) | can be disabled                                                                                                  |
| Convolutional interleaver             | can be disabled                                                                                                  |
| Convolutional encoder                 | can be disabled                                                                                                  |
| Mode                                  |                                                                                                                  |
| DATA                                  | MPEG-2 input signal (without input signal automatic switchover to PRBS with TS PARALLEL, stuffing with ASI, SPI) |
| NULL TS PACKET                        | null packets (PID=1FFF, payload=0)                                                                               |
| NULL PRBS PACKET                      | null packets (PID=1FFF, payload=PRBS, $2^{15}-1/2^{23}-1$ to ITU-T Rec. 0.151)                                   |
| PRBS before convolutional encoder     | $2^{15}-1/2^{23}-1$ to ITU-T Rec. 0.151                                                                          |
| Modulation frequency response         | ±0.25 dB                                                                                                         |
| Shoulder attenuation                  | 48 dB                                                                                                            |

## Options

### Noise generator

| Option R&S®SFL-N                                          |                                                 |
|-----------------------------------------------------------|-------------------------------------------------|
| Noise characteristics                                     |                                                 |
| Bandwidth                                                 |                                                 |
| Selectable receiver bandwidth                             | 0.1 MHz to 10 MHz<br>max. 10 Msps for satellite |
| RF noise bandwidth (–1 dB)                                | 16 MHz                                          |
| C/N settings                                              |                                                 |
| Variation range                                           | 60 dB                                           |
| Minimum selectable C/N                                    | 0 dB (carrier bandwidth ≥6 MHz)                 |
| Resolution                                                | 0.1 dB                                          |
| C/N error                                                 |                                                 |
| Absolute error                                            | <0.3 dB (after calibration), typ. 0.2 dB        |
| RF characteristics                                        |                                                 |
| Additional frequency response (max. 5 MHz carrier offset) | <0.4 dB                                         |
| Limitation of maximum RF output level                     | >0 dB to 18 dB (in steps of 6 dB)               |
| Residual carrier                                          | typ. –50 dBc                                    |
| Minimum RF frequency with Noise On                        | >15 MHz                                         |

### BER measurement

| Option R&S®SFL-K17         |                                           |
|----------------------------|-------------------------------------------|
| Input data rate            | max. 63 Mbit/s serial, 80 Mbit/s parallel |
| PRBS sequences             | $2^{15}-1/2^{23}-1$ to ITU-T Rec. 0.151   |
| Input                      |                                           |
| Serial                     |                                           |
| Input impedance            | BER DATA/BER CLOCK<br>high impedance      |
| Input level                | TTL                                       |
| Connector                  | BNC connector                             |
| Clock, data                | normal, inverted                          |
| BER Mode                   | $2^{15}-1/2^{23}-1$ to ITU-T Rec. 0.151   |
| PRBS                       |                                           |
| Parallel                   |                                           |
| Characteristics            | TS PARALLEL<br>meet EN50083-9             |
| Input impedance            | 100 Ω                                     |
| Input level                | 100 mV to 2 V, LVDS                       |
| Connector                  | 25-pin female, shielded                   |
| BER mode                   | MPEG-2 transport stream payload           |
| PRBS, PRBS INVERTED        | payload evaluation as PRBS <sup>1)</sup>  |
| NULL PRBS PACKET           | payload evaluation with PID 1FFFhex       |
| PID FILTER FOR PRBS PACKET | as PRBS <sup>2)</sup>                     |

- Standard transport stream evaluation. The four header bytes are removed and the 184 bytes of payload evaluated as PRBS. This corresponds to the NULL PRBS PACKET mode in the R&S®SFL.
- Standard transport stream evaluation. The PID filter selects null packets with PID = 1FFFhex. Only the payload of these packets is evaluated as PRBS. This corresponds to the ASI or SPI mode in the R&S®SFL, where NULL PRBS PACKETS are used for stuffing.

## General data

|                                |                                                                                                        |
|--------------------------------|--------------------------------------------------------------------------------------------------------|
| Memory for instrument settings | 50                                                                                                     |
| Remote control                 | IEC 60625 (IEEE 488)<br>RS-232-C                                                                       |
| Command set                    | SCPI 1995.0                                                                                            |
| Operating temperature range    | +5 °C to +45 °C                                                                                        |
| Permissible temperature range  | 0 °C to +50 °C                                                                                         |
| Storage temperature range      | −40 °C to +70 °C                                                                                       |
| <b>Mechanical resistance</b>   |                                                                                                        |
| Vibration, sinusoidal          | 5 Hz to 150 Hz, max. 2 g at 55 Hz,<br>55 Hz to 150 Hz, 0.5 g const.,<br>meets IEC 60068-2-6, IEC 61010 |
| Vibration, random              | 10 Hz to 300 Hz,<br>acceleration 1.2 g (rms)                                                           |
| Shock                          | 40 g shock spectrum,<br>meets MIL-STD-810D                                                             |
| <b>Climatic resistance</b>     |                                                                                                        |
| Damp heat                      | 95% rel. humidity,<br>cyclic test at +25 °C/+40 °C,<br>meets IEC 60068                                 |
| Electromagnetic compatibility  | EMC Directive of EU                                                                                    |

|                   |                                                         |
|-------------------|---------------------------------------------------------|
| Immunity to RFI   | 10 V/m                                                  |
| Electrical safety | EN 61010-1, IEC 61010,<br>UL3111-1, CSA-C22.2 No.1010.1 |

### Base unit

|                        |                                                                                           |
|------------------------|-------------------------------------------------------------------------------------------|
| Power supply           | 100 V to 120 V (AC), 50 Hz to 60 Hz<br>200 V to 240 V (AC), 50 Hz to 60 Hz<br>max. 250 VA |
| Dimensions (W × H × D) | 427 mm × 88 mm × 450 mm (2 HU)                                                            |
| Weight                 | 11 kg                                                                                     |

### Option R&S®SFL-N

|                        |                                                                   |
|------------------------|-------------------------------------------------------------------|
| Power supply           | 100 V to 240 V (AC), 50 Hz to 60 Hz<br>max. 60 VA                 |
| Dimensions (W × H × D) | Option R&S®SFL-N<br>Base unit with option R&S®SFL-N               |
|                        | 427 mm × 55 mm × 450 mm (1 HU)<br>427 mm × 154 mm × 450 mm (3 HU) |
| Weight                 | Option R&S®SFL-N<br>Base unit with option R&S®SFL-N               |
|                        | 5 kg<br>16 kg                                                     |

## Ordering information

| Order Designation                                                                                                                             | Type               | Order No.                    |
|-----------------------------------------------------------------------------------------------------------------------------------------------|--------------------|------------------------------|
| TV Test Transmitter DVB-T/H                                                                                                                   | R&S®SFL-T          | 2084.4005.20                 |
| TV Test Transmitter ATSC/8VSB                                                                                                                 | R&S®SFL-V          | 2084.4005.30                 |
| TV Test Transmitter ISDB-T                                                                                                                    | R&S®SFL-I          | 2084.4005.50                 |
| TV Test Transmitter DVB-C                                                                                                                     | R&S®SFL-C          | 2084.4005.15                 |
| TV Test Transmitter J.83/B                                                                                                                    | R&S®SFL-J          | 2084.4005.40                 |
| TV Test Transmitter DVB-S/DVB-DSNG                                                                                                            | R&S®SFL-S          | 2084.4005.10                 |
| <b>Option</b>                                                                                                                                 |                    |                              |
| Noise Generator                                                                                                                               | R&S®SFL-N          | 2084.4040.02                 |
| BER Measurement                                                                                                                               | R&S®SFL-K17        | 2084.5682.02                 |
| <b>Recommended extras</b>                                                                                                                     |                    |                              |
| Service Kit                                                                                                                                   |                    | 2084.4340.02                 |
| Service Manual                                                                                                                                |                    | 2084.4128.22                 |
| 19" Adapter for rackmounting (base unit)                                                                                                      | R&S®ZZA-211        | 1096.3260.00                 |
| 19" Adapter for rackmounting (R&S®SFL-N)                                                                                                      | R&S®ZZA-111        | 1096.3254.00                 |
| Matching Pads 50 $\Omega$ /75 $\Omega$<br>Matched at both ends, attenuation 5.7 dB, no DC isolation<br>Matched at one end, attenuation 1.7 dB | R&S®RAM<br>R&S®RAZ | 0358.5414.02<br>0358.5714.02 |
| Bag (2 HU)                                                                                                                                    | R&S®ZZT-214        | 1109.5119.00                 |



More information at  
[www.rohde-schwarz.com](http://www.rohde-schwarz.com)  
(search term: SFL)



[www.rohde-schwarz.com](http://www.rohde-schwarz.com)

Europe: Tel. +49 1805 12 4242, e-mail: [customersupport@rohde-schwarz.com](mailto:customersupport@rohde-schwarz.com)

North America: Tel. 888 837 87 72, option 2 (from within the USA and Canada), +1410-910-7800, option 2 (from other countries), e-mail: [customer.support@rsa.rohde-schwarz.com](mailto:customer.support@rsa.rohde-schwarz.com)

Asia: Tel. +65 68463710, e-mail: [customersupport.asia@rohde-schwarz.com](mailto:customersupport.asia@rohde-schwarz.com)