



ABN 43 064 478 842

➤ 231 osborne avenue clayton south, vic 3169
PO box 1548, clayton south, vic 3169
t 03 9265 7400 f 03 9558 0875
freecall 1800 680 680
www.tmgtestequipment.com.au

Test & Measurement

- sales
- rentals
- calibration
- repair
- disposal

Complimentary Reference Material

This PDF has been made available as a complimentary service for you to assist in evaluating this model for your testing requirements.

TMG offers a wide range of test equipment solutions, from renting short to long term, buying refurbished and purchasing new. Financing options, such as Financial Rental, and Leasing are also available on application.

TMG will assist if you are unsure whether this model will suit your requirements.

Call TMG if you need to organise repair and/or calibrate your unit.


If you click on the “Click-to-Call” logo below, you can call us for FREE!

TMG Corporate Website

TMG Products Website



Click-to-Call
TMG Now

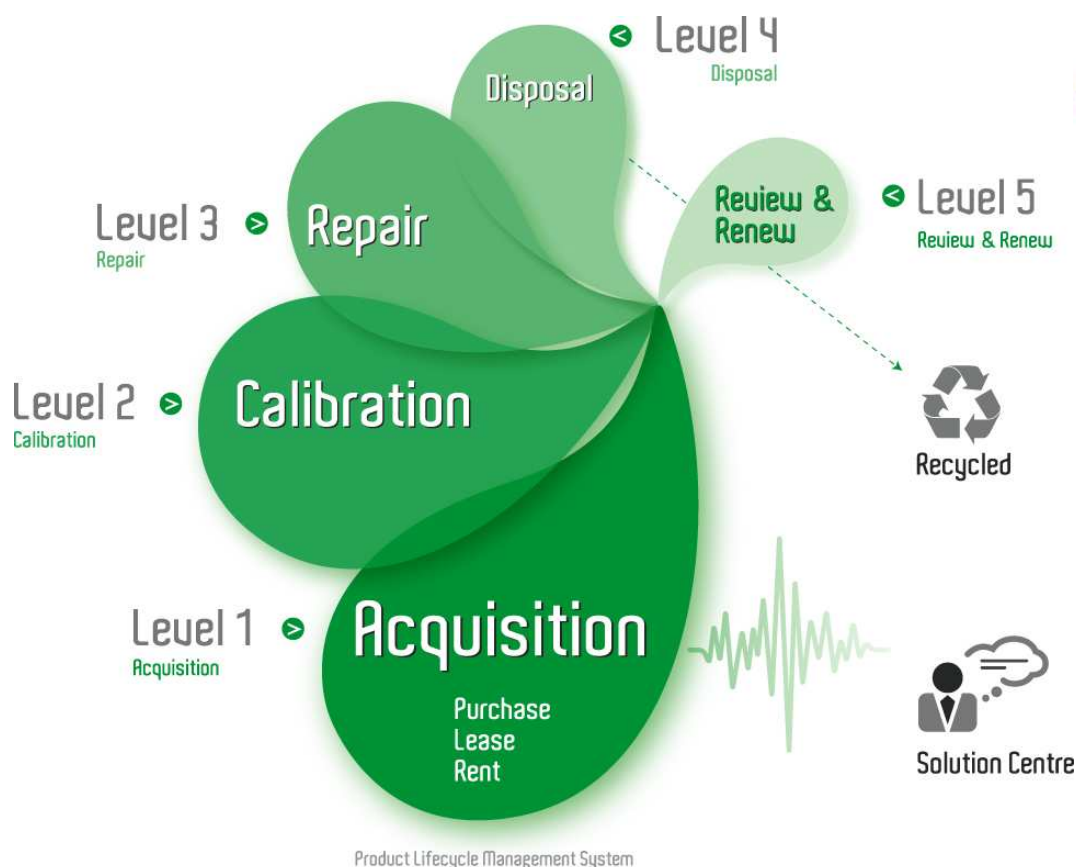

Disclaimer:

All trademarks appearing within this PDF are trademarks of their respective owners.



Electrical Communication Adapters

► AFTDS • AMT75



The AFTDS Differential Signal Adapter and the AMT75 75 Ω Adapter provide an effective means for 50 Ω terminated instruments to connect to, and analyze differential and high-speed electrical communication signals, as well as video signals. Both adapters are rugged and have the TEKPROBE™ interface, which provides convenient auto-scaling of waveforms on Tektronix TDS Series oscilloscopes. Also, the low VSWR (Return Loss) performance minimizes measurement errors commonly associated when interfacing with complex electrical signals.

Ideal for use in pulse shape compliance testing of high-speed electrical communication signals.

► Characteristics

AFTDS Differential Signal Adapter
Electrical Standards –
DS-1: (1.544 Mb/s).
DS-1A: (2.048 Mb/s).
DS-1C: (3.152 Mb/s).
DS-2: (6.312 Mb/s).
E-1: (2.048 Mb/s).
Standards of Compliance –
ANSI T1.102, ITU-T G.703.
Bandwidth (–3 dB) – 7 kHz to 120 MHz.
Rise Time – <3.0 ns.

Attenuation –
5x, (–14 dB) $\pm 5.0\%$ (valid over 50 kHz to 30 MHz).
Droop – $\leq 2.0\%$ per 700 ns.
VSWR (return loss) –
 $\leq 1.1:1$ (≥ 26 dB), typical (valid over 50 kHz to 30 MHz).

AFTDS Features
TEKPROBE Interface –
Auto-scaling and auto-termination with Tektronix TDS oscilloscopes.
Input Impedance –
100 Ω , 110 Ω or 120 Ω $\pm 3.0\%$ (selectable).
(Valid over 50 kHz to 30 MHz.)
Load Impedance – 50 Ω $\pm 3.0\%$.
Safety –
UL3111-1, CSA1010.1, EN61010-1, IEC61010-1 (AFTDS only).

AMT75 75 Ω Adapter
Electrical Standards –
DS-3: (44.736 Mb/s).
DS-4: (139.264 Mb/s).
STS-1: (51.84 Mb/s).
STS-3: (155.51 Mb/s).
STM-1: (155.51 Mb/s).
E-2: (8.448 Mb/s).
E-3: (34.368 Mb/s).
E-4: (139.264 Mb/s).
D-1: (270 Mb/s).
D-2: (143 Mb/s).
Standards of Compliance –
ANSI T1.102, ITU-T G.957, ITU-T G.703, Bellcore GR-253-CORE.
Bandwidth (–3 dB) – DC to 1.0 GHz (typical).
Rise Time – <350 ps (typical).
Attenuation – 5X, (–14 dB) $\pm 2.0\%$.

► Features & Benefits

AFTDS Differential Signal Adapter for Electrical Communication

Complies with ANSI T1.102 and ITU-T G.703 Standards

120 MHz Bandwidth

Low VSWR (Return Loss) $\leq 1.1:1$, (≥ 26 dB)

Connects Directly to TDS Series Scope (TEKPROBE Interface) or Other 50 Ω Terminated Instruments

CE Certified

AMT75 75 Ω to 50 Ω Adapter for Electrical Communication and Video Signals

Complies with ANSI T1.102, ITU-T G.957, ITU-T G.703 Standards and Bellcore GR-253-CORE

1.0 GHz Bandwidth

Low VSWR (Return Loss) $\leq 1.1:1$, (≥ 26 dB)


Connects Directly to TDS Series Scope (TEKPROBE Interface) or Other 50 Ω Terminated Instruments

► Applications

Communication Pulse Shape or Eye Pattern Testing

Electrical Communication and Video Signal Interface for 50 Ω Terminated Instruments

▶ AFTDS • AMT75

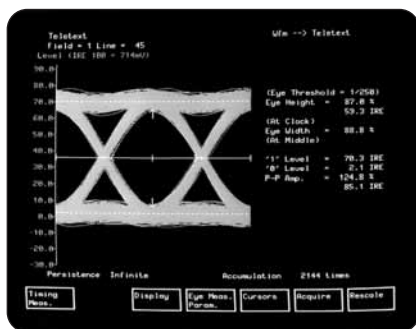


▶ AFTDS VSWR/Return Loss

AMT75 Features
TEKPROBE™ Interface –
Auto-scaling and auto-termination with Tektronix
TDS scopes.
Input Impedance – $75\ \Omega \pm 1.5\%$.
Output Impedance – $50\ \Omega \pm 1.5\%$.

AFTDS

Includes: Bantam (M) to Siemens (F) cable,
5 in. (012-1520-00), user's manuals (English)
(070-9483-00), Certificate of Traceable Calibration.

Recommended Accessories

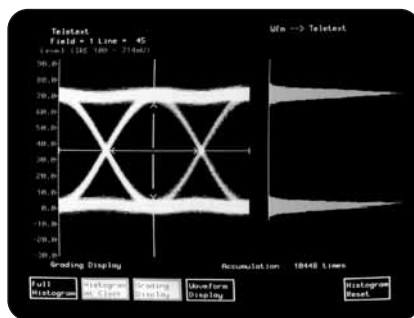RJ45/RJ11 (F) to RJ45 (F) Adapter —
Order 103-0409-00.

▶ AMT75 VSWR/Return Loss.

AMT75

Includes: User's manuals (English) (070-9479-00),
Certificate of Traceable Calibration.

Recommended Accessories

50 Ω , BNC (F) to SMA (M) Adapter –
Order 015-0554-00.

Recommended Oscilloscopes

11000 Series Oscilloscopes.

USA 1 (800) 426-2200

Updated 15 June 2005

Copyright © 2005, Tektronix, Inc. All rights reserved. Tektronix products are covered by U.S. and foreign patents, issued and pending. Information in this publication supersedes that in all previously published material. Specification and price change privileges reserved. TEKTRONIX and TEK are registered trademarks of Tektronix, Inc. All other trade names referenced are the service marks, trademarks or registered trademarks of their respective companies.

8/05 HR/WOW

60W-11302-1

Tektronix
Enabling Innovation