



ABN 43 064 478 842

231 Osborne Avenue Clayton South, VIC 3169
PO Box 1548, Clayton South, VIC 3169
t 03 9265 7400 f 03 9558 0875
freecall 1800 680 680
www.tmgtestequipment.com.au

Test & Measurement

- > sales
- > rentals
- > calibration
- > repair
- > disposal

Complimentary Reference Material

This PDF has been made available as a complimentary service for you to assist in evaluating this model for your testing requirements.

TMG offers a wide range of test equipment solutions, from renting short to long term, buying refurbished and purchasing new. Financing options, such as Financial Rental, and Leasing are also available on application.

TMG will assist if you are unsure whether this model will suit your requirements.

Call TMG if you need to organise repair and/or calibrate your unit.

If you click on the "Click-to-Call" logo below, you can call us for FREE!

TMG Corporate Website

TMG Products Website



Click-to-Call
TMG Now



Product Lifecycle Management System

Disclaimer:

All trademarks appearing within this PDF are trademarks of their respective owners.



Optical-to-Electrical Converters

▶ P6701B • P6703B



▶ P6701B, P6703B.

The Tektronix P6700 Series optical-to-electrical (O/E) converters change optical signals into electrical signals for convenient analysis on Tektronix TDS7000/5000/3000/500/600/700 Series oscilloscopes equipped with the TEKPROBE interface, or any other oscilloscope when used with the 1103 TEKPROBE power supply. The P6700 Series O/E converters are ideal for optical source characterization in the development, manufacture or service of optical communication systems and devices.

Small, conveniently packaged P6701B and P6703B optical-to-electrical analog converters provide an accurate interface for optical pulse shape measurements. The high gain, large dynamic range and stable

output offset of these O/E converters make them ideal for performing eye-pattern analysis and extinction measurements.

The P6701B/P6703B optical input is a one meter, 62.5 μ multimode fiber with an FC/PC connector. Using the standard assortment of hybrid fiber optic mating sleeves, these O/Es can accommodate the various industry connector standards.

The TEKPROBE interface provides power, auto-scaling, auto-termination and correct units (microwatts) when used with Tektronix TDS500/600/700 Series oscilloscopes.

▶ Features & Benefits

Broad Wavelength Response
500 to 950 nm or 1100 to 1700 nm

High Bandwidth DC up to 1.2 GHz

High Gain 1 V/mW

Low Noise
<11 pW/squareroot Hz

Probe Connects Directly to TDS7000/5000/3000/500/600/700 Series Scope (TEKPROBE™) or Other 50 Ω Instruments with 1103 TEKPROBE® Power Supply

SONET/SDH and Fibre Channel Reference Receiver Performance: TDS500C/700C (Opt. 3C or 4C) P6701B: Fibre Channel up to 1063 Mb/s, P6703B: SONET/SDH up to 622 Mb/s

▶ Applications

Eye-pattern Testing of Optical Communication Signals (SONET/SDH and Fibre Channel)


COMPUTING

COMMUNICATIONS


VIDEO

Optical-to-Electrical Converters

▶ P6701B • P6703B

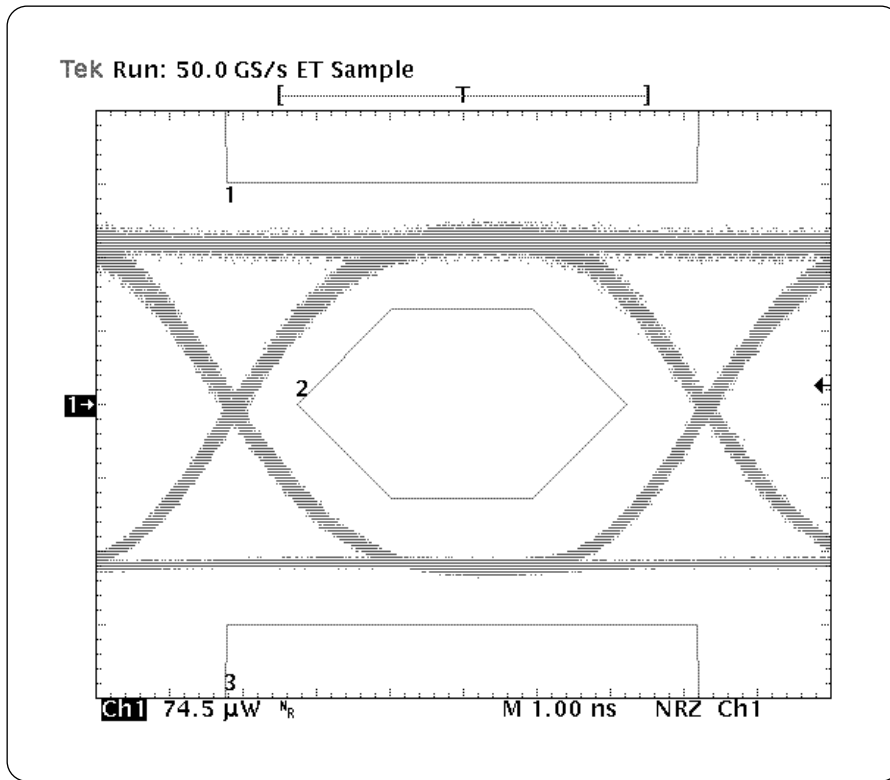

▶ OC-3/STM-1 SONET/SDH transmitter eye pattern test.

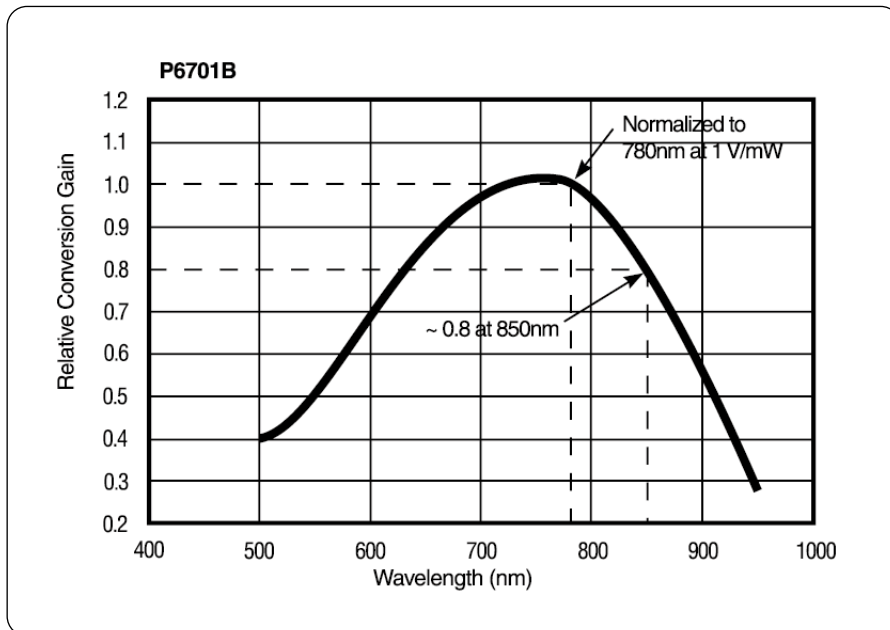

▶ P6701B: Typical wavelength dependent gain (at 25 °C).


SONET/SDH and Fibre Channel Reference Receiver Performance

The P6701B and P6703B can be transformed into ITU G.957 or ANSI FC-PH reference receivers when they are either ordered as an option (3C - P6701B, 4C - P6703B) to the latest Tektronix TDS500C/700 Series digitizing oscilloscopes or as a stand-alone hardware solution (nominal).

The TDS Option 3C provides a calibrated P6701B reference receiver for Fibre Channel data rates from 133 Mb/s up to 1063 Mb/s. Option 4C provides a calibrated P6703B reference receiver for SONET/SDH data rates from 52 Mb/s up to 622 Mb/s. The optical-to-electrical converters are matched and calibrated to a specific scope channel which ensures complete system compliance with the fourth-order Bessel-Thompson frequency response.

The P6703B, when used in conjunction with the FS52, FS156 or FS622 SONET/SDH hardware filters, provide customers with a nominal reference receiver performance for 51.84 Mb/s, 155.52 Mb/s, and 622 Mb/s.

The standard P6701B has a nominal frequency response which follows the fourth-order Bessel-Thompson for Fibre Channel 1063 Mb/s. The 1103 TEKPROBE power supply can be used to connect these products to the 11800 Series or CSA803 Series sampling oscilloscopes.

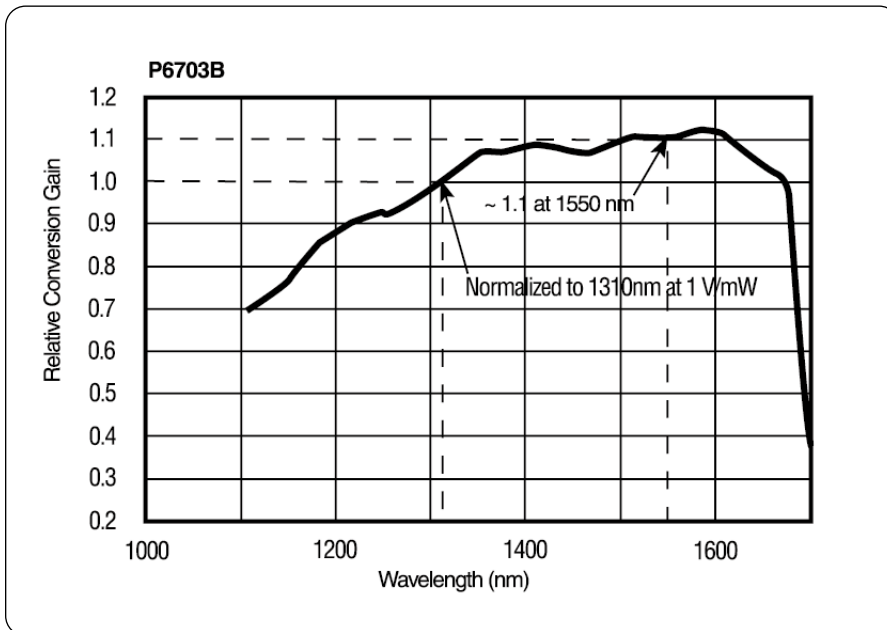

▶ P6703B: Typical wavelength dependent gain (at 25 °C).

▶ Characteristics

	P6701B	P6703B
Wavelength Response	500 to 950 nm	1100 to 1650 nm
Bandwidth*1 (Typical)	DC to 1.0 GHz	DC to 1.2 GHz
Rise Time (Typical)	≤500 ps	≤395 ps
Conversion Gain	1 V/mW	1 V/mW
Max. Input Optical Power	1 mW (0 dBm)*2	1 mW (0 dBm)*2
	10 mW (10 dBm)*3	10 mW (10 dBm)*3
	20 mW (13 dBm)*4	20 mW (13 dBm)*4
Max. Output Modulation Depth for Reference Receiver Performance	≤200 mV _{p-p}	≤200 mV _{p-p}
Noise Equivalent Power	≤0.87 μW (RMS)*5	≤0.59 μW (RMS)*5
	≤28 pW per squareroot Hz	≤19 pW per squareroot Hz
Max. Input Fiber Core Diameter	62.5 μm	62.5 μm

*1 Optical Bandwidth (-6 dB electrical).

*2 Maximum average operating power.

*3 Max average nondestruct.

*4 Max peak nondestruct.

*5 1 GHz low pass filter in series with output.

▶ Ordering Information

P6701B

Optical-to-electrical Converter with FC/PC Connector.

Includes: Hard Case, User Manual (English, French, German, and Japanese), Assorted Fiber Optic Hybrid Connectors (FC/FC, FC/ST and FC/SC), Certificate of Traceable Calibration. Please specify power plug when ordering.

P6703B

Optical-to-electrical Converter with FC/PC Connector.

Includes: Hard Case, User Manual (English, French, German, and Japanese), Assorted Fiber Optic Hybrid Connectors (FC/FC, FC/ST and FC/SC), Certificate of Traceable Calibration. Please specify power plug when ordering.

Service

Opt. C3 – Calibration Service 3 Years.

Opt. C5 – Calibration Service 5 Years.

Opt. D1 – Calibration Data Report.

Opt. D3 – Calibration Data Report 3 Years (with Option C3).

Opt. D5 – Calibration Data Report 5 Years (with Option C5).

Opt. R3 – Repair Service 3 Years.

Opt. R5 – Repair Service 5 Years.

Power Plug Options

Opt. A0 – US Plug, 115 V, 60 Hz.

Opt. A1 – Euro Plug, 220 V, 50 Hz.

Opt. A2 – UK Plug, 240 V, 50 Hz.

Opt. A3 – Australian Plug, 240 V, 50 Hz.

Opt. A5 – Swiss Plug, 220 V, 50 Hz.

Accessories

Single-mode Fiber Optic Cables – (9 μm)

FC/PC to FC/PC. Order 174-1387-00.

FC/PC to ST. Order 174-1386-00.

FC/PC to SC/PC. Order 174-3921-00.

FC/PC to Diamond (2.5). Order 174-1497-00.

FC/PC to Diamond (3.5). Order 174-1385-00.

Multimode Fiber Optic Cables – (62.5 μm)

FC/PC to FC/PC. Order 174-2322-00.

FC/PC to SC/PC. Order 174-4093-00.

FC/PC to SMA. Order 174-2324-00.

90/10, 3 Port Single-mode Optical Splitter

FC/PC Connectors – Order 174-3737-00.

10 dB, In-line Single-mode Optical Attenuator

FC/PC Connectors – Order 119-5118-00.

DIN/FC Fiber Optic Hybrid Connector –

Order 020-2209-00.

Optical-to-Electrical Converters

▶ P6701B • P6703B

Contact Tektronix:

ASEAN / Australasia / Pakistan (65) 6356 3900

Austria +43 2236 8092 262

Belgium +32 (2) 715 89 70

Brazil & South America 55 (11) 3741-8360

Canada 1 (800) 661-5625

Central Europe & Greece +43 2236 8092 301

Denmark +45 44 850 700

Finland +358 (9) 4783 400

France & North Africa +33 (0) 1 69 86 80 34

Germany +49 (221) 94 77 400

Hong Kong (852) 2585-6688

India (91) 80-2275577

Italy +39 (02) 25086 1

Japan 81 (3) 3448-3010

Mexico, Central America & Caribbean 52 (55) 56666-333

The Netherlands +31 (0) 23 569 5555

Norway +47 22 07 07 00

People's Republic of China 86 (10) 6235 1230

Poland +48 (0) 22 521 53 40

Republic of Korea 82 (2) 528-5299

Russia, CIS & The Baltics +358 (9) 4783 400

South Africa +27 11 254 8360

Spain +34 (91) 372 6055

Sweden +46 8 477 6503/4

Taiwan 886 (2) 2722-9622

United Kingdom & Eire +44 (0) 1344 392400

USA 1 (800) 426-2200

USA (Export Sales) 1 (503) 627-1916

For other areas contact Tektronix, Inc. at: 1 (503) 627-7111

Updated 20 September 2002

Our most up-to-date product information is available at:
www.tektronix.com

Product(s) are manufactured
in ISO registered facilities.



Copyright © 2003, Tektronix, Inc. All rights reserved. Tektronix products are covered by U.S. and foreign patents, issued and pending. Information in this publication supersedes that in all previously published material. Specification and price change privileges reserved. TEKTRONIX and TEK are registered trademarks of Tektronix, Inc. All other trade names referenced are the service marks, trademarks or registered trademarks of their respective companies.

08/03 HB/WWW

60W-11304-1