

ABN 43 064 478 842

231 osborne avenue clayton south, vic 3169
PO box 1548, clayton south, vic 3169
t 03 9265 7400 f 03 9558 0875
freecall 1800 680 680

www.tmgtestequipment.com.au

# Test & Measurement

- sales
- rentals
- calibration
- repair
- disposal

# **Complimentary Reference Material**


This PDF has been made available as a complimentary service for you to assist in evaluating this model for your testing requirements.

TMG offers a wide range of test equipment solutions, from renting short to long term, buying refurbished and purchasing new. Financing options, such as Financial Rental, and Leasing are also available on application.

TMG will assist if you are unsure whether this model will suit your requirements.

Call TMG if you need to organise repair and/or calibrate your unit.

If you click on the "Click-to-Call" logo below, you can all us for FREE!

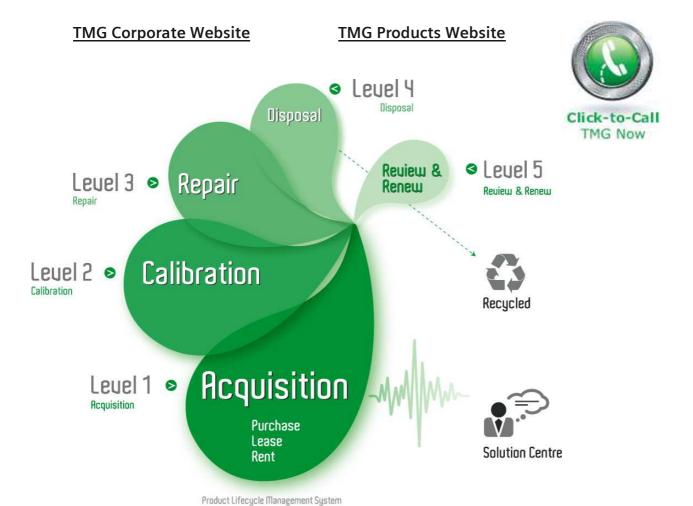

#### **Disclaimer:**

All trademarks appearing within this PDF are trademarks of their respective owners.








# TekConnect<sup>™</sup> Adapters

► TCA-BNC • TCA-SMA • TCA-N

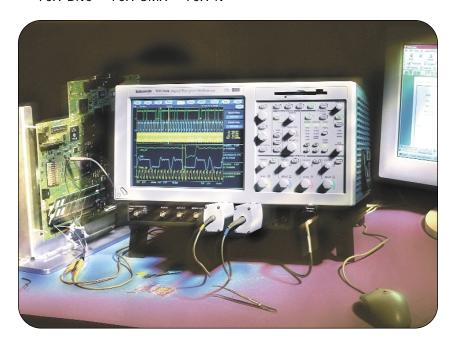

Tektronix award-winning TDS7000, CSA7000 and TDS6000 Series oscilloscopes allow engineers to make high-speed measurements quickly and efficiently. In addition to these high-speed measurements, many of today's designers also face the challenges of measuring high voltage, current, power or even micro-volt level signals to gain a more complete understanding of their designs.

The TekConnect family of amplifiers, probes and adapters make it the ideal solution for such challenges, delivering a variety of acquisition capabilities through the use of existing compatible TekConnect and TEKPROBE measurement tools.

#### TekConnect TCA Series Adapters Expand the Functionality of Tektronix High-performance Oscilloscopes

This family of three different adapter systems provides less signal distortion and better performance than traditional connections used to move a signal from one environment to another, such as BNC to N or BNC to SMA.

TCA-BNC Adapter (50  $\Omega$  only) A direct 50  $\Omega$  input with TEKPROBE BNC 50  $\Omega$  capability is available with the TCA-BNC adapter. This adapter may be used as a direct 50  $\Omega$  BNC input or with Tektronix high-speed active and differential probes requiring the TEKPROBE BNC 50  $\Omega$  interface.

#### Features & Benefits

TCA-BNC - TekConnect-to-TEKPROBE<sup>™</sup> BNC 50  $\Omega$ 

- DC to ≥4 GHz (Instrument Dependent)
- 50 Ω Input (Only)
- Probe Control TEKPROBE BNC (50 Ω)
- Standard with TDS7154 and TDS7254

# TCA-SMA - TekConnect-to-

- DC to ≥18 GHz (Instrument Dependent)
- 50 Ω Input (Only)
- Standard with TDS7404

#### TCA-N - TekConnect-to-N

- DC to ≥11 GHz (Instrument Dependent)
- 50 Ω Input (Only)

TekConnect Interface Delivers Superior Signal Fidelity, Unparalleled Versatility and Ease-of-use

#### Applications

Verification, Characterization and Debug of Sophisticated Designs in Communications, Computer, and Semiconductor Electronics Environments, Such As:

- Jitter and Timing Analysis (Computer Systems)
- Disk Drive Analysis
- Investigation of Transient Phenomena
- Spectral Analysis
- Power Supplies/Inverters (Switching and Linear)
- Semiconductor Devices (SCRs, IGBTs, FETs, CMOS)
- Electronic Ballasts
- Industrial/Consumer Electronics
- Mobile Communications (Phone, Satellite, Relay Stations)
- Motor Drives
- Transportation Systems (Electronic Vehicles, Electric Trains, Locomotives, Avionics)



#### TCA-SMA and TCA-N Adapters (50 $\Omega$ only)

The high-speed SMA and N type adapters allow a more direct connection to the signal under test requiring N or SMA connections without losing performance by adding other external conversion adapters.

#### TekConnect Interface Delivers Superior Signal Fidelity, Unparalleled Versatility and Ease-of-use

The TekConnect interface ensures superior signal fidelity with useful bandpass up to 18 GHz at the oscilloscope input, while offering unparalleled versatility with the world's widest array of accessory signal acquisition solutions for high-performance, real-time oscilloscopes. This interface delivers a more robust oscilloscope interface for next-generation products with multi-GHz analog bandwidths, overcoming many of the inherent bandwidth limitations of BNC-based interfaces. The TekConnect interface preserves a low voltage standing wave ratio (VSWR) 50  $\Omega$  environment as well as a reliable electrical connection. A convenient, one-button release and locking mechanism provides quick, easy installation and removal of probes, amplifiers and adapters.

#### ► Characteristics

#### ► Model Specifications

	TCA-BNC	TCA-SMA	TCA-N	
Bandwidth (-3 dB)	DC to 4 GHz	DC to ≥18 GHz	DC to ≥11 GHz	
	(Maximum Frequency)	(Maximum Frequency)	(Maximum Frequency)	
	(Limited By Host	(Limited By Host	(Limited By Host	
	Instrument)	Instrument)	Instrument)	
Probe Tip Bandwidth	N/A			
(with P6139A at -3 dB)				
BW Limit	N/A			
DC Gain Accuracy	Refer to Host Instrument Specification			
Propogation Delay	<200 ps			
(Input-to-Output)				
Input Impedance	50 Ω			
Maximum Input Voltage	Refer to Host Instrument Specification			
(Derated with Frequency)				

#### ► Typical

	TCA-BNC	TCA-SMA	TCA-N	
Displayed System Input Offset	N/A			
RMS Noise	Refer to Host Instrument Specification			
RF Insertion Loss	0.25 dB Max	0.06*SQ Root F (GHz)	0.3 dB Max	
	(Adapter Only)	(Adapter Only)	(Adapter Only)	
Rise Time	≤100 ps	≤22 ps	≤36 ps	
(calculated small signal	(Minimum Rise Time)	(Minimum Rise Time)	(Minimum Rise Time)	
$t_r = 0.4/F_{3 dB}$	(Limited By Host	(Limited By Host	(Limited By Host	
	Instrument)	Instrument)	Instrument)	
Linear Dynamic Range	Refer to Host Instrument Specification			
Linearity	N/A			

#### ► Nominal

	TCA-BNC	TCA-SMA	TCA-N	
Inputs	1	1	1	
	(TEKPROBE BNC 50 $\Omega$ )	(SMA Type Connection)	(N Type Connection)	
Input Coupling	Refer to Host Instrument Specification			
Safety Certifications	UL3111-1			
U.S. NRTL Listing	UL3111-2-032			
Canadian	CAN/CSA C22.2 No.1010.1			
Certification	CAN/CSA C22.2 No.1010.2.032			
European Union	EN61010-1/A2			
Compliance	EN61010-2-032			
Other	IEC61010-1/A2			
	IEC61010-2-032			
GPIB Programmable	Through Host Instrument Commands			
Power Requirements	TekConnect			
Adapter Model Compatibility	Refer to TDS7000 Series TekConnect Adapters Compatibility Table			
Warranty	1 Year			

#### ▶ TekConnect<sup>™</sup> Amplifier, Adapters and Probes Compatibility\*<sup>1</sup>

Oscilloscope TekConnect Amplifiers, Adapters and Probes TDS6604 TDS7154 / TDS7404 / TCA-1MEG TCA-BNC TCA-N Accessory Type TCA-SMA 6 GHz CSA7154 / CSA7404 High Impedance Adapter Adapter Adapter TDS7254 4 GHz / **Buffer Amplifier** (Standard w/ (Standard 4 GHz TDS7154 / w/TDS7404 / 1.5 GHz / (P6139A Included) TDS7254 / CSA7404) 1.5 GHz / 2.5 GHz CSA7154) Instrument Input TekConnect TekConnect TEKPROBE BNC TEKPROBE BNC SMA-to-TekConnect N-to-Connection 1 MΩ-to-TekConnect 50 Ω-to-TekConnect TekConnect TekConnect Instrument Input TekConnect TekConnect TekConnect  $1 \text{ M}\Omega/10 \text{ pF}$  $50 \Omega$  $50 \Omega$  $50 \Omega$ Impedance Probes, Amplifier and Probes, Amplifier and Probes, Amplifier and Adapter Dependent Adapter Dependent Adapter Dependent P6101B P6101B P6101B Passive Voltage P6101B N/A N/A N/A Probes (1X) w/TCA-1MEG w/TCA-1MEG w/TCA-1MEG Passive Voltage P6139A N/A P6139A P6139A P6139A N/A N/A Probes (10X) w/TCA-1MEG w/TCA-1MEG w/TCA-1MEG  $50~\Omega$  Divider P6150 w/TCA-SMA P6150 w/TCA-SMA P6150 w/TCA-SMA N/A P6158 P6150 N/A P6158 w/TCA-BNC P6158 w/TCA-BNC P6158 w/TCA-BNC Voltage Probes P6245 w/TCA-BNC P6245 w/TCA-BNC N/A Active Voltage P6245 w/TCA-BNC N/A P6245 N/A Probes General P6243 w/TCA-BNC P6243 w/TCA-BNC P6243 w/TCA-BNC P6243 Active Voltage Probes P7260\*2 P7260\*2 P7260\*2 N/A P6249 N/A N/A P7240\*2 P7240\*2 P7240\*2 < 3.3 V Logic P6249 w/TCA-BNC P6249 w/TCA-BNC P6249 w/TCA-BNC Differential Voltage P7330 P7330 P7330 N/A P6330 N/A N/A Probes < 3.3 V Logic P6330 w/ TCA-BNC P6330 w/ TCA-BNC P6330 w/ TCA-BNC Differential P6248 w/TCA-BNC P6248 w/TCA-BNC P6248 w/TCA-BNC N/A P6248 N/A N/A Voltage Probes P6247 w/TCA-BNC P6247 w/TCA-BNC P6247 w/TCA-BNC P6247 <8 V Logic P6246 w/TCA-BNC P6246 w/TCA-BNC P6246 w/TCA-BNC P6246 N/A Differential ADA400A ADA400A ADA400A ADA400A N/A N/A Voltage Probes w/TCA-1MEG w/TCA-1MEG w/TCA-1MEG Micro-volt High Voltage P5205 w/ TCA-1MEG P5205 w/ TCA-1MEG P5205 w/ TCA-1MEG P5205 N/A N/A N/A Probes Differential P5210 w/TCA-1MEG P5210 w/TCA-1MEG P5210 w/TCA-1MEG P5210 High Voltage Probes P5100 w/TCA-1MEG P5100 w/TCA-1MEG P5100 w/TCA-1MEG P5100 N/A N/A N/A Single-ended P6015A w/TCA-1MEG P6015A w/TCA-1MEG P6015A w/TCA-1MEG P6015A TCP202 w/TCA-BNC TCP202 w/TCA-BNC TCP202 w/TCA-BNC N/A Current Probe N/A TCP202 N/A AC/DC < 15 A Current Probe AM503S w/ AM503S w/ AM503S w/ AM503S AM503S N/A N/A AC/DC 5 mA to 20 A TCA-BNC or TCA-BNC or TCA-BNC or TCA-1MEG TCA-1MEG TCA-1MEG Current Probe CT6 w/TCA-BNC CT6 w/TCA-BNC CT6 w/TCA-BNC N/A CT6 N/A N/A AC High Frequency CT1 w/TCA-1MEG CT1 w/TCA-1MEG CT1 w/TCA-1MEG CT1 Current Probe P6021 w/TCA-1MEG P6021 w/TCA-1MEG P6021 w/TCA-1MEG P6021 N/A N/A N/A AC Low Frequency P6022 w/TCA-1MEG P6022 w/TCA-1MEG P6022 w/TCA-1MEG P6022 O/E Converter P6701B w/TCA-BNC P6701B w/TCA-BNC P6701B w/TCA-BNC N/A P6701B N/A N/A Probes P6703B w/TCA-BNC P6703B w/TCA-BNC P6703B w/TCA-BNC P6703B

Please refer to TekConnect Amplifier data sheet for more information about amplifiers.

<sup>\*1</sup>Firmware version 2.1 or greater required for all referenced oscilloscopes.

<sup>\*2</sup>P7240, P7260 and P7330 are high-speed active and differential probing solutions for Tektronix oscilloscopes with TekConnect interface. These probes require no other adapters.

### TekConnect™ Adapters

► TCA-BNC • TCA-SMA • TCA-N

#### ► Ordering Information

TCA-BNC - TekConnect-to-BNC Adapter.

TCA-SMA - TekConnect-to-SMA Adapter.

Includes: SMA Type Adapter; Instruction Manual; Certificate of Compliance.

TCA-N - TekConnect-to-N Adapter.

Includes: N Type Adapter; Instruction Manual; Certificate of Compliance.

#### Recommended Accessories

Passive Voltage Probes

**P6150** – (Use with TCA-SMA), 9 GHz, 1X/10X, 50  $\Omega$  divider probe.

**P6158** – (Use with TCA-BNC), 3 GHz, 20X, 50  $\Omega$  divider probe.

High Speed Active Voltage Probes

P6205 – (Use with TCA-BNC), 750 MHz, 10X, <2 pF/10 M $\Omega$ .

**P6243** – (Use with TCA-BNC), 1 GHz, 10X, < 1 pF/1  $M\Omega.$ 

 $\mbox{P6245}$  — (Use with TCA-BNC), 1.5 GHz, 10X, < 1 pF/1  $M\Omega.$ 

P6249 – (Use with TCA-BNC), 4 GHz, 5X, <1 pF/20 kΩ.

High Speed Active Differential Voltage Probes

P6247 – (Use with TCA-BNC), 1 GHz, 1X/10X, <1 pF/200 k $\Omega$  diff.

**P6248** – (Use with TCA-BNC), 1.5 GHz, 1X/10X, <1 pF/200 kΩ diff.

**P6330** – (Use with TCA-BNC), 1.5 GHz, 1X/10X, <1 pF/200 k $\Omega$  diff.

Electrical Communication Adapters

 $\mbox{AMT75}$  – (Use with TCA-BNC), 75  $\Omega$  to 50  $\Omega$  Video Adapter.

**AFTDS** – (Use with TCA-BNC), Differential Communications Adapter.

**Current Measurement Tools** 

TCP202 – (Use with TCA-BNC), AC/DC, 20 Amps, TEKPROBE Interconnect Current Probe 20 Amps.

AM503S – (Use with TCA-BNC), AC/DC, 5 mA to 700 Amp, Current Amplifier Measurement System. (Extended Current Capability by ordering additional Current Probes).

CT-1 – (Use with TCA-BNC), 1 GHz, AC Current Transformer.

CT-2 – (Use with TCA-BNC), 200 MHz, AC Current Transformer.

CT-6 – (Use with TCA-BNC), 2 GHz, AC Current Transformer.

Cables and Terminations

012-0057-01 – (Use with TCA-BNC), 50  $\Omega$  BNC to BNC Coaxial Cable.

012-0482-00 – (Use with TCA-BNC), 50  $\Omega$  BNC to BNC Coaxial Cable, Precision 1%, Male to Male.

011-0049-02 – (Use with TCA-BNC), 50  $\Omega$  feed through termination.

#### Contact Tektronix:

ASEAN Countries & Pakistan (65) 6356 3900

Australia & New Zealand (65) 6356 3900

Austria +43 2236 8092 262

Belgium +32 (2) 715 89 70

Brazil & South America 55 (11) 3741-8360

Canada 1 (800) 661-5625

Central Europe & Greece +43 2236 8092 301

**Denmark** +45 44 850 700

Finland +358 (9) 4783 400

France & North Africa +33 (0) 1 69 86 80 34

Germany +49 (221) 94 77 400

Hong Kong (852) 2585-6688

India (91) 80-2275577

Italy +39 (02) 25086 1

Japan (Sony/Tektronix Corporation) 81 (3) 3448-3111

Mexico, Central America & Caribbean 52 (55) 56666-333

The Netherlands +31 (0) 23 569 5555

Norway +47 22 07 07 00

People's Republic of China 86 (10) 6235 1230

Poland +48 (0) 22 521 53 40

Republic of Korea 82 (2) 528-5299

Russia, CIS & The Baltics +358 (9) 4783 400

South Africa +27 11 254 8360

Spain +34 (91) 372 6055

Sweden +46 8 477 6503/4

Taiwan 886 (2) 2722-9622

United Kingdom & Eire +44 (0) 1344 392400

USA 1 (800) 426-2200

For other areas contact Tektronix, Inc. at: 1 (503) 627-7111

Updated 8 February 2002





For the most up-to-date product information visit our web site at WWW.tektronix.com

Copyright © 2002, Tektronix, Inc. All rights reserved. Tektronix products are covered by U.S. and foreign patents, issued and pending. Information in this publication supersedes that in all previously published material. Specification and price change privileges reserved. TEKTRONIX and TEK are registered trademarks of Tektronix, Inc. All other trade names referenced are the service marks, trademarks or registered trademarks of their respective companies.

04/02 HB/XBS 60W-14970-1

