



ABN 43 064 478 842

➤ 231 osborne avenue clayton south, vic 3169
PO box 1548, clayton south, vic 3169
t 03 9265 7400 f 03 9558 0875
freecall 1800 680 680
www.tmgtestequipment.com.au

Test & Measurement

- sales
- rentals
- calibration
- repair
- disposal

Complimentary Reference Material

This PDF has been made available as a complimentary service for you to assist in evaluating this model for your testing requirements.

TMG offers a wide range of test equipment solutions, from renting short to long term, buying refurbished and purchasing new. Financing options, such as Financial Rental, and Leasing are also available on application.


TMG will assist if you are unsure whether this model will suit your requirements.

Call TMG if you need to organise repair and/or calibrate your unit.

If you click on the “Click-to-Call” logo below, you can call us for FREE!

TMG Corporate Website

TMG Products Website

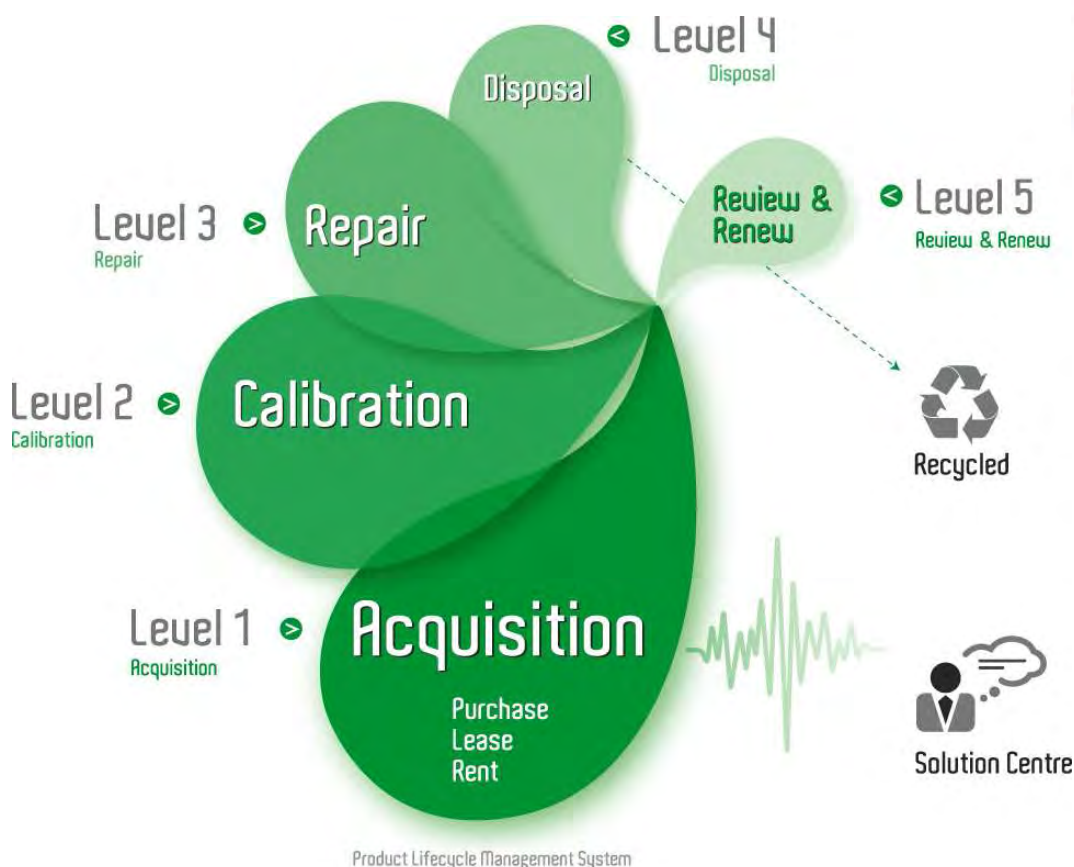

Disclaimer:

All trademarks appearing within this PDF are trademarks of their respective owners.




Three Phase Oil
Cool Model

Three Phase Oil Cooled Models

AMPS	Floor Space (mm)	Height (mm)	Weight (Kg) Without oil
4/8/10/15 Amps	250 x 330	610	50/56/62/75
20 Amps	280 x 355	610	95
28 Amps	330 x 410	810	125
40 Amps	695 x 560	1065	140
50 Amps	650 x 560	1065	170
60 Amps	750 x 590	1065	195
75 Amps	760 x 700	1380	305
100 Amps	845 x 700	1380	350
150 Amps	970 x 730	1150	520
200 Amps	1070 x 730	1150	565
225 Amps	1070 x 730	1150	600
300 Amps	1920 x 1240	1825	895
400 Amps	1920 x 1240	2050	1045
500 Amps	1920 x 1750	1825	1325
600 Amps	1920 x 1750	2050	1495



Three Phase
Portable Model

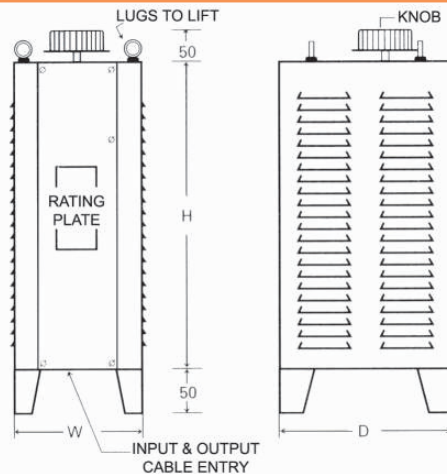


Three Phase Portable Models

TYPE	B	D	H	App. Weight
2P-3	150	200	350	15 Kg.
4P-3	200	250	425	30 Kg.
8P-3	200	250	425	36 Kg.
10P-3	210	275	425	42 Kg.
15P-3	250	300	445	55 Kg.
20P-3	275	325	450	65 Kg.
28P-3	350	400	545	85 Kg.




Single Phase
Portable Model

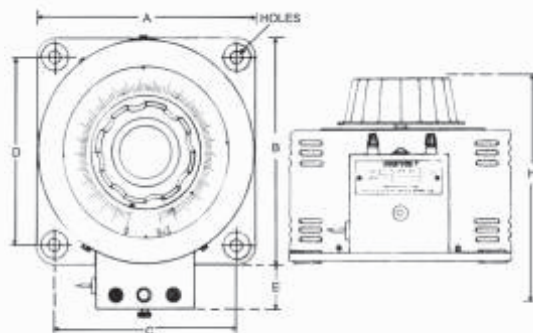


Single Phase Portable Models

TYPE	A	B	C	D	E	H	Ø
4P-1	175	175	146	146	35	140	10
8P-1	175	175	146	146	35	170	10
10P-1	180	180	155	155	35	170	10
15P-1	225	225	176	176	40	190	11
20P-1	240	240	205	205	40	190	11
28P-1	300	300	238	238	70	225	13



Single Phase
Flush Type Model

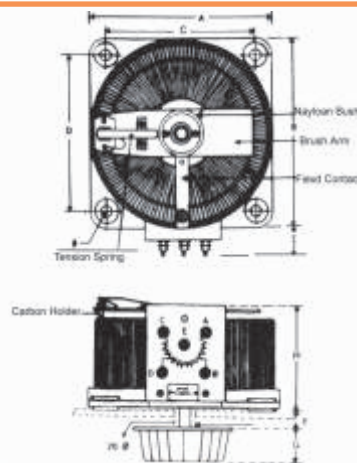

Single Phase Flush Type Models

TYPE	A	B	C	D	E	F	G	H	Ø
2F-1	110	110	92	92	15	6	30	95	7
3F-1	110	110	92	92	15	6	30	115	7
4F-1	175	175	146	146	35	6	35	102	10
8F-1	175	175	146	146	25	6	35	130	10
10F-1	180	180	155	155	25	6	35	135	10
15F-1	225	225	176	176	25	10	40	135	11
20F-1	240	240	205	205	25	10	40	135	11
28F-1	300	300	238	238	60	10	40	145	13

Due to the company's continuous research program, the information herein may change at anytime without previous notification.

UDEY

UDEYRAJ ELECTRICALS P.Ltd.

212-A, Hind Saurashtra Indl. Est.,
Marol Naka, Mumbai-400 059. INDIA
Tel: + 91 22 6691 6181
Fax: + 91 22 6694 2787
E-mail: udeyraj@vsnl.com
Website: www.udeyraj.com

HIGH CURRENT REGUVOLT AUTO TRANSFORMERS IS OUR SPECIALITY

Reguvolt is now available in high current ranges from 255 Amps. up to 1000 Amps, in both single phase & three phase model. Special paralleling techniques designed by us, have made it possible to surpass pervious current limit of 200 Amps. in torrodial auto transformers.

The following are the salient features of high current Reguvolt Transformers:

- 1 Special forced current paralleling techniques result in current sharing of each coil +2%.
- 2 Flanged type pressed steel radiators, are supplied or separately packed, making the units easy for transportation.
- 3 Welded or High Torque A.C. Synchronous Drive.
- 4 Terminals in the form of bus-bars.
- 5 All other feature of oil-cooled auto transformers.