

ABN 43 064 478 842

231 osborne avenue clayton south, vic 3169 PO box 1548, clayton south, vic 3169 t 03 9265 7400 f 03 9558 0875 freecall 1800 680 680

www.tmgtestequipment.com.au

# Test & Measurement

- sales
- rentals
- calibration
- repair
- disposal

# **Complimentary Reference Material**

This PDF has been made available as a complimentary service for you to assist in evaluating this model for your testing requirements.

TMG offers a wide range of test equipment solutions, from renting short to long term, buying refurbished and purchasing new. Financing options, such as Financial Rental, and Leasing are also available on application.

TMG will assist if you are unsure whether this model will suit your requirements.

Call TMG if you need to organise repair and/or calibrate your unit.

If you click on the "Click-to-Call" logo below, you can all us for FREE!

## **TMG Corporate Website TMG Products Website** Leuel 4 Disposal Disposal Click-to-Call TMG Now ○ Leuel 5 Review & Leuel 3 Repair Renew Review & Renew Repair Calibration Calibration Recycled Acquisition Leuel 1 Acquisition **Purchase** Lease Solution Centre Rent

## Product Lifecycle Management System

#### **Disclaimer:**


All trademarks appearing within this PDF are trademarks of their respective owners.







DC - 5.0 GHz 250 WATTS

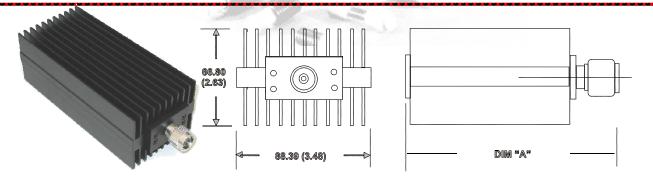

### Features

Type N, SMA, or DIN 7/16 connectors per MIL-STD-348A, interface dimensions mate nondestructively with MIL-PRF-39012. Designed to meet MIL-DTL-39030 environmental specification.

## Specifications

Nominal Impedance: 50 ohms

Frequency Range: DC - 5.0 GHz

**Power Rating:** 250 watt CW/ 10KW peak. Maximum rated average power to 25°C ambient temperature, de-rated linearly to 25 watts at 125°C. 10 kilowatt peak (5 µsec pulse width; 1.5% duty cycle).

Temperature Range: -55°C to +125°C

**Construction:** Black finned aluminum alloy body with passivated stainless steel connector. Gold plated beryllium copper female contact. Stainless steel male contact.

#### **Maximum VSWR:**

Frequency (GHz)	VSWR
DC - 2.5	1.10
2.5 – 5.0	1.20

**Weight:** 1.5 kg / 3.5 lbs.

**Connectors:** Type N; stainless steel connectors per MIL-STD-348 Interface dimension mate nondestructively with MIL-PRF-39012 connectors.

**Calibration:** VSWR performed across frequency range. Calibration test data available at additional cost.

**Dimension A:** 212.1 (8.35)

**Height:** 66.8 (2.63)

Width: 88.4 (3.48)

Note: Dimensions are given in mm (inched). Dimensions are maximum unless otherwise specified.



WEB: http://www.WeinschelAssociates.com EMAIL: sales@WeinschelAssociates.com