



ABN 43 064 478 842

➤ 231 Osborne Avenue Clayton South, VIC 3169  
 PO Box 1548, Clayton South, VIC 3169  
 t 03 9265 7400 f 03 9558 0875  
 freecall 1800 680 680  
[www.tmgtestequipment.com.au](http://www.tmgtestequipment.com.au)

## Test & Measurement

- sales
- rentals
- calibration
- repair
- disposal

## Complimentary Reference Material

This PDF has been made available as a complimentary service for you to assist in evaluating this model for your testing requirements.

TMG offers a wide range of test equipment solutions, from renting short to long term, buying refurbished and purchasing new. Financing options, such as Financial Rental, and Leasing are also available on application.


TMG will assist if you are unsure whether this model will suit your requirements.

Call TMG if you need to organise repair and/or calibrate your unit.

If you click on the “Click-to-Call” logo below, you can call us for FREE!

TMG Corporate Website

TMG Products Website

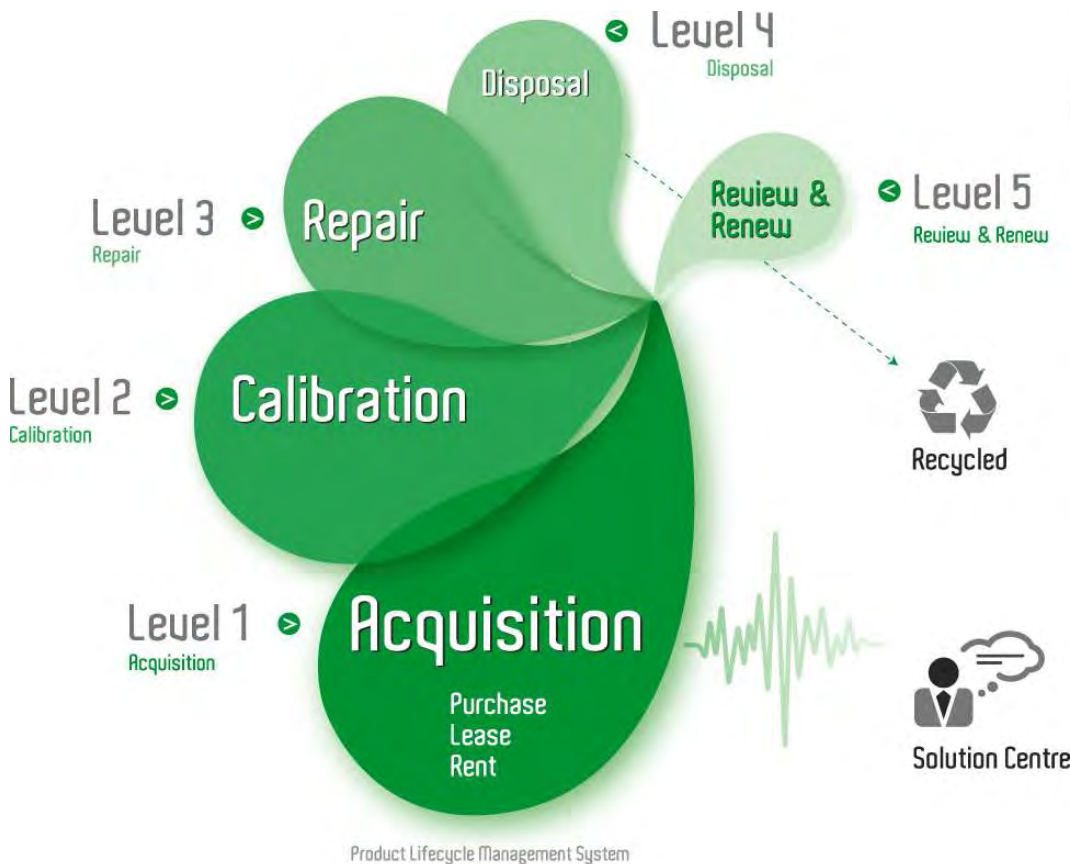

**Disclaimer:**

All trademarks appearing within this PDF are trademarks of their respective owners.



# Broadband Resistive Power Splitter MODEL PS-018

DC – 18.0 GHz

1 WATT

## Features

These resistive power splitters are intended for use with RF and wireless applications where one of the two outputs are included in a leveling loop or used as a reference in a ratio system providing an output signal whose source impedance is matched to 50 ohms.

MAXIMUM VSWR	
Frequency (GHz)	VSWR
DC – 18.0	1.30
Max if both output ports are terminated in 50 ohms.	

## Specifications

**NOMINAL IMPEDANCE:** 50Ω

**FREQUENCY RANGE:** DC TO 18.0 GHz


**INSERTION LOSS:** (Between input & either output arm): 6 dB nominal, 7.5 dB maximum.

**MAXIMUM INPUT POWER:** 1.0 watt CW, 1 kilowatt peak (5μsec pulse width, 0.05 duty cycle) maximum (input connector only).

**MAXIMUM BALANCE OF POWER DIVISION:**

DC – 18.0 GHz	0.15 dB
8.0 – 18.0 GHz	0.20 dB
Typical	0.1 dB

## PHYSICAL DIMENSIONS:

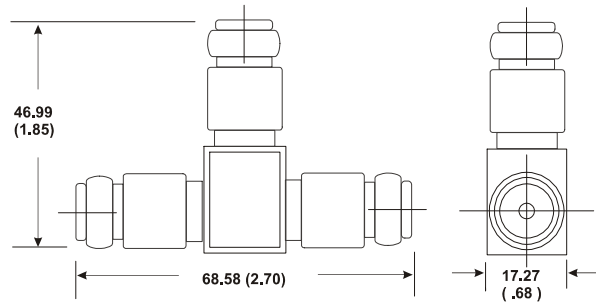

**PHASE TRAKING:** ±2° nominal between output ports

**EQUIVALENT OUTPUT SWR:** (Port 2 & 3 when in a leveling or ratio system)

DC – 2.0 GHz	1.05
2.0 – 4.0 GHz	1.07
4.0 – 8.0 GHz	1.10
8.0 – 18.0 GHz	1.15

**POWER COEFFICIENT:** <0.005 dB/dB x W

**TEMPERATURE COEFFICIENT:** <0.0004 dB/dB x °C

**TEMPERATURE RANGE:** -55°C to +85 °C

**CONSTRUCTION:** Nickel plated brass body; stainless steel connectors; gold plated beryllium copper contacts.

**CONNECTORS:** Type N connectors per MIL-STD-348 interface nondestructively with MIL-PRF-39012 connectors.

**WEIGHT:** .17 kg ( 6 oz) maximum

**NOTE:** All dimensions are given in mm (inches) and are maximum, unless otherwise specified.



**WEINSCHEL ASSOCIATES**

TEL: 877.948.8342 / 301.963.4630 ♦ Fax: 301.963.8640

WEB: <http://www.WeinschelAssociates.com>

EMAIL: [sales@WeinschelAssociates.com](mailto:sales@WeinschelAssociates.com)

128

Specification  
Subject to change  
without notice