

ABN 43 064 478 842

231 osborne avenue clayton south, vic 3169 PO box 1548, clayton south, vic 3169 t 03 9265 7400 f 03 9558 0875 freecall 1800 680 680

www.tmgtestequipment.com.au

Test & Measurement

- sales
- rentals
- calibration
- repair
- disposal

Complimentary Reference Material


This PDF has been made available as a complimentary service for you to assist in evaluating this model for your testing requirements.

TMG offers a wide range of test equipment solutions, from renting short to long term, buying refurbished and purchasing new. Financing options, such as Financial Rental, and Leasing are also available on application.

TMG will assist if you are unsure whether this model will suit your requirements.

Call TMG if you need to organise repair and/or calibrate your unit.

If you click on the "Click-to-Call" logo below, you can all us for FREE!

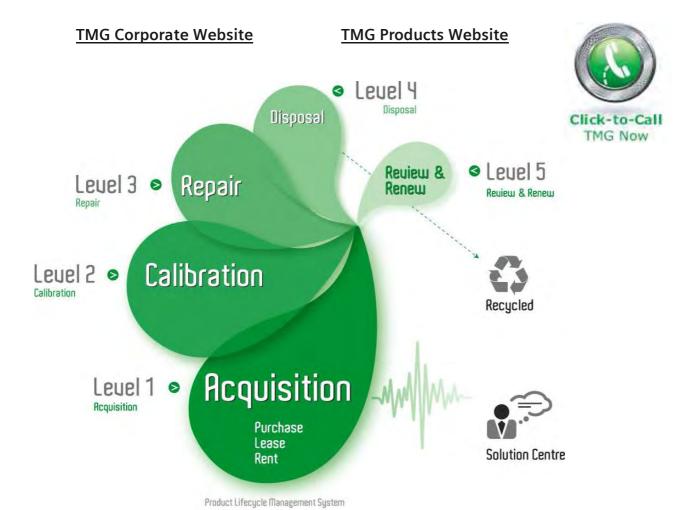

Disclaimer:

All trademarks appearing within this PDF are trademarks of their respective owners.







Precision Coaxial Adapter

MODEL WA1513

DC - 18.0 GHz

Type N to Type N





Physical Dimensions:



Nominal Impedance: 50 ohms

Frequency Range: DC - 18.0 GHz

Temperature Range: -55°C to +125°C

Construction: Stainless Steel bodies, gold-plated

beryllium copper contacts.

Connectors: Type N per MIL-STD-348 interface dimensions mate non-destructively with MIL-PRF-


39012 connectors.


Maximum VSWR		
Frequency (GHz)	VSWR	
DC - 18.0	1.15	


Weight: WA1513-33 40g (1.4 oz)

WA1513-44 49g (1.7 oz) WA1513-34 46g (1.6 oz)

Insertion Loss		
Frequency (GHz)	Max. Ins Loss	Repeatability
DC - 18.0	0.25	0.02









141