



ABN 43 064 478 842

➤ 231 osborne avenue clayton south, vic 3169
PO box 1548, clayton south, vic 3169
t 03 9265 7400 f 03 9558 0875
freecall 1800 680 680
www.tmgtestequipment.com.au

Test & Measurement

- sales
- rentals
- calibration
- repair
- disposal

Complimentary Reference Material

This PDF has been made available as a complimentary service for you to assist in evaluating this model for your testing requirements.

TMG offers a wide range of test equipment solutions, from renting short to long term, buying refurbished and purchasing new. Financing options, such as Financial Rental, and Leasing are also available on application.

TMG will assist if you are unsure whether this model will suit your requirements.

Call TMG if you need to organise repair and/or calibrate your unit.

If you click on the “Click-to-Call” logo below, you can call us for FREE!

TMG Corporate Website

TMG Products Website



Disclaimer:

All trademarks appearing within this PDF are trademarks of their respective owners.

Precision Coaxial Adapter

MODEL WA1548

DC – 18.0 GHz

Type SMA to Type N



Specifications

Nominal Impedance: 50 ohms

Frequency Range: DC - 18.0 GHz

Temperature Range: -55°C to +125°C

Construction: Stainless Steel bodies, beryllium copper with gold plated female contacts, stainless steel male contacts.





Connectors: Types N and SMA per MIL-STD-348 interface dimensions mate non-destructively with MIL-PRF-39012 connectors. Coupling Torque 14 in-lbs for N-Type and 8 in-lbs for SMA.

Weight: 49g (1.72 oz), max

Maximum VSWR	
Frequency (GHz)	VSWR
DC - 18.0	1.10 per adapter

Insertion Loss		
Frequency (GHz)	Max. Ins Loss	Repeatability
DC - 12.4	0.40	0.01
12.4 - 18.0	0.43	0.02

Physical Dimensions:

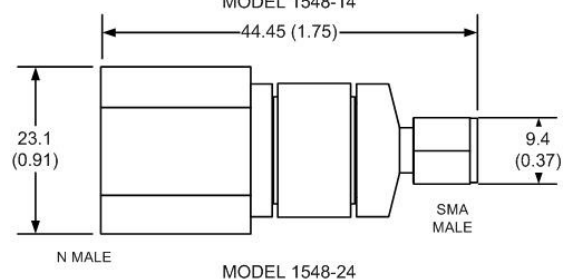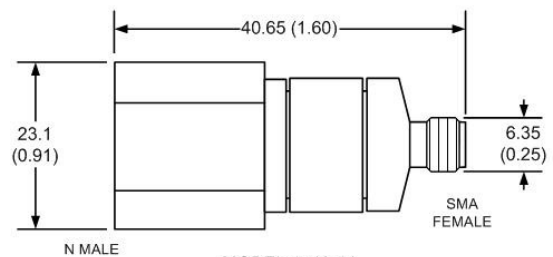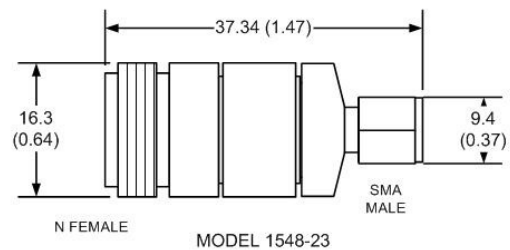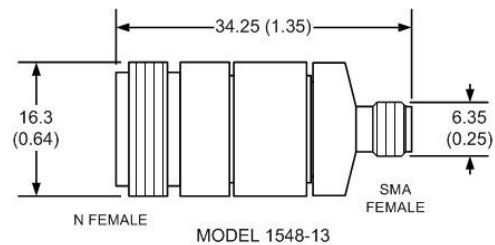

WEINSCHTEL ASSOCIATES

TEL: 877.948.8342 / 301.963.4630 ♦ Fax: 301.963.8640

WEB: <http://www.WeinschelAssociates.com>

EMAIL: sales@WeinschelAssociates.com

142

Specification
Subject to change
without notice