



ABN 43 064 478 842

> 231 osborne avenue clayton south, vic 3169  
PO box 1548, clayton south, vic 3169  
t 03 9265 7400 f 03 9558 0875  
freecall 1800 680 680  
[www.tmgtestequipment.com.au](http://www.tmgtestequipment.com.au)

## Test & Measurement

- > sales
- > rentals
- > calibration
- > repair
- > disposal

## Complimentary Reference Material

This PDF has been made available as a complimentary service for you to assist in evaluating this model for your testing requirements.

TMG offers a wide range of test equipment solutions, from renting short to long term, buying refurbished and purchasing new. Financing options, such as Financial Rental, and Leasing are also available on application.

TMG will assist if you are unsure whether this model will suit your requirements.

Call TMG if you need to organise repair and/or calibrate your unit.

If you click on the "Click-to-Call" logo below, you can call us for FREE!

TMG Corporate Website

TMG Products Website



### Disclaimer:



All trademarks appearing within this PDF are trademarks of their respective owners.

# Fixed Coaxial Attenuator High Power

## MODEL WA49

DC – 8.5 GHz

150 WATTS

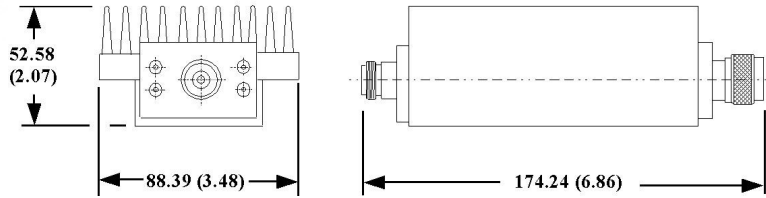

### Features

Designed to meet MIL-DTL-3933 environmental specification. Unit may be mounted in any position. Low Intermodulation option available.

### Specifications

**Nominal Impedance:** 50 ohms.

**Frequency Range:** DC - 8.5 GHz.

**Nominal dB Values:** 3 - 40 dB.

**Power Sensitivity:** < 0.0001 dB/dB/W;  
Unidirectional in power.

**Power Rating:** 150 watts average. Maximum rated average power to 25°C ambient temperature, derated linearly to 15 watts at 125°C. 5 kilowatt peak (5 µsec pulse width; 1.5% duty cycle).

**Temperature Range:** -55°C to +125°C.

**Temperature Coefficient:** < 0.0004 dB/dB/°C.

**Calibration:** Insertion Loss and VSWR performed across frequency range. Calibration test data available at additional cost.

**Standard Nominal Values/ Deviations:**

Attenuation (dB)	Accuracy ± dB	
	DC - 8.5 GHz	
	WA49	WA49-LIM
3,6	0.75	-----
10,20	0.75	1.25
30	0.75	1.75
40	1.0	1.75

**Construction:** Black aluminum alloy body with passivated stainless steel connectors. Gold plated beryllium copper female contacts.

**Connectors:** Type N, SMA, and DIN 7/16 stainless steel M/F connectors per MIL-STD-348A, interface dimensions mate nondestructively with MIL-PRF-39012.

Add -LIM for Low Intermodulation option after connector option.

Example: WA49-dB-XX-LIM

**Maximum VSWR:**

Frequency (GHz)	VSWR
DC - 4.0	1.20
4.0 - 8.5	1.35

**Weight:**

Type N	1.5 kg/ 3.3 lb.
DIN 7/16	1.7 kg/ 3.7 lb.

**Physical Dimensions:**

**Length:**

Connector	Length
Type N	174.24 (6.86)
DIN 7/16	226 (8.5)

**Width:** 89.0 (3.5) Max

**Height:** 54.0 (2.1) Max

Note: Dimensions are given in mm (inches) unless otherwise specified.



## WEINSCHTEL ASSOCIATES

TEL: 877.948.8342 / 301.963.4630 ♦ Fax: 301.963.8640

WEB: <http://www.WeinschelAssociates.com>

EMAIL: [sales@WeinschelAssociates.com](mailto:sales@WeinschelAssociates.com)