

ABN 43 064 478 842

231 osborne avenue clayton south, vic 3169 PO box 1548, clayton south, vic 3169 t 03 9265 7400 f 03 9558 0875 freecall 1800 680 680

www.tmgtestequipment.com.au

Test & Measurement

- sales
- rentals
- calibration
- repair
- disposal

Complimentary Reference Material


This PDF has been made available as a complimentary service for you to assist in evaluating this model for your testing requirements.

TMG offers a wide range of test equipment solutions, from renting short to long term, buying refurbished and purchasing new. Financing options, such as Financial Rental, and Leasing are also available on application.

TMG will assist if you are unsure whether this model will suit your requirements.

Call TMG if you need to organise repair and/or calibrate your unit.

If you click on the "Click-to-Call" logo below, you can all us for FREE!

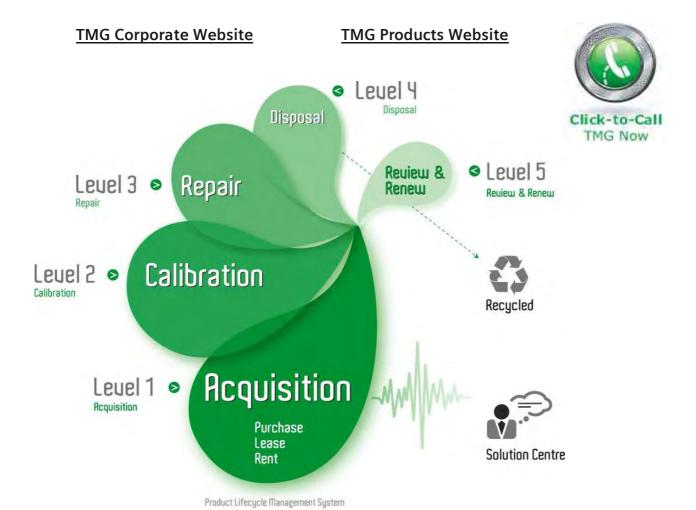

Disclaimer:

All trademarks appearing within this PDF are trademarks of their respective owners.









ABN 43 064 478 842

231 osborne avenue clayton south, vic 3169 PO box 1548, clayton south, vic 3169 t 03 9265 7400 f 03 9558 0875 freecall 1800 680 680

www.tmgtestequipment.com.au

Test & Measurement

- sales
- rentals
- calibration
- repair
- disposal

Complimentary Reference Material


This PDF has been made available as a complimentary service for you to assist in evaluating this model for your testing requirements.

TMG offers a wide range of test equipment solutions, from renting short to long term, buying refurbished and purchasing new. Financing options, such as Financial Rental, and Leasing are also available on application.

TMG will assist if you are unsure whether this model will suit your requirements.

Call TMG if you need to organise repair and/or calibrate your unit.

If you click on the "Click-to-Call" logo below, you can all us for FREE!

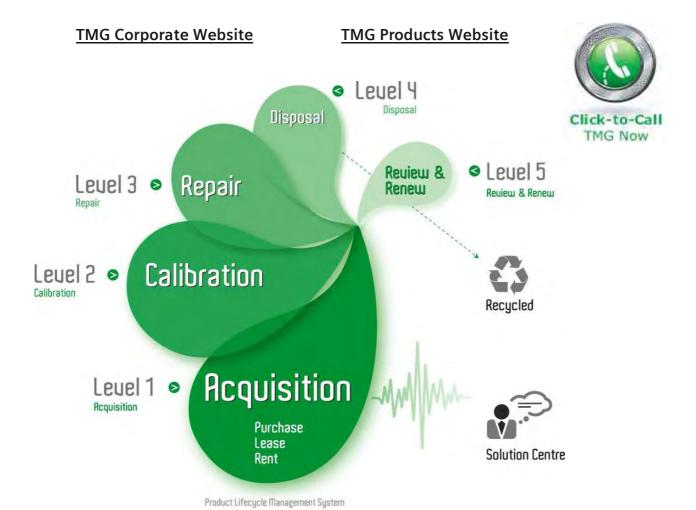

Disclaimer:

All trademarks appearing within this PDF are trademarks of their respective owners.








DC - 18.0 GHz 10 WATTS



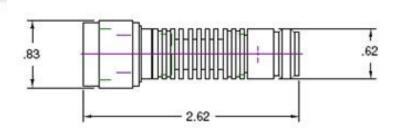

features

Type N stainless steel M/F connectors per MIL-STD-348A, interface dimensions mate nondestructively with MIL-PRF-39012. Designed to meet MIL-DTL-3933 environmental specification. Unit may be mounted in any position.

Specifications

Nominal Impedance: 50 ohms.

Frequency Range: DC -18.0 GHz.

Nominal dB Values: 1 - 60 dB.

Power Sensitivity: < 0.005 dB/dB/W:

Bidirectional in power.

Power Rating: 10 watts average, 1 KW peak. Full power from -55°C to +25°C: De-rated linearly to 0

W at +125° C.

Temperature Range: -55°C to +125°C.

Temperature Coefficient: < 0.0004 dB/dB/°C.

Construction: Black aluminum alloy body with

passivated stainless steel connectors.

Standard Nominal Values and Deviations:

Attenuation (dB)	Accuracy ± dB
1,2,10	0.5
3,6	0.3
20	0.5
30	1.0
50	1.25
60	1.50

Calibration: Insertion Loss and VSWR performed across frequency range. Calibration test data available at additional cost.

Maximum VSWR:

Frequency (GHz)	VSWR
DC - 8.0	1.20
8.0 – 12.4	1.30
12.4 – 18.0	1.35

Length:

67.30 (2.62).

Weight:

.074 kg/ 2.6 oz.

Note: Dimensions are given in mm (inches) and are maximum, unless otherwise specified.



WEB: http://www.WeinschelAssociates.com EMAIL: sales@WeinschelAssociates.com 12