



## *Enabling Australia's Field Technicians to build, troubleshoot and maintain better communications networks.*



This reference material is provided by TMG Test Equipment, VI.AVI's **only** Master Distributor for Contractors in Australia



**Industry Best Pricing**



**Finance Available**



**Short to Medium Project-Based Rental Solutions**



**Dedicated Technical & After-Sales Support**



**In-house Diagnostics, Repair & NATA Calibration Laboratory**



# **FREECALL 1800 680 680**

# MAP Tunable Laser




For stand-alone applications, the MAP Tunable Laser may be used as a benchtop

## Key Features

- Low ASE
- > 110 nm of tunable range over C+L-band
- + 8 dBm peak output power
- Polarization maintaining fiber (PMF) output
- Tuning speed up to 100nm/s
- Mode-hop-free

Laser Spectrum of MAPL+2T1FA compared to standard TLS

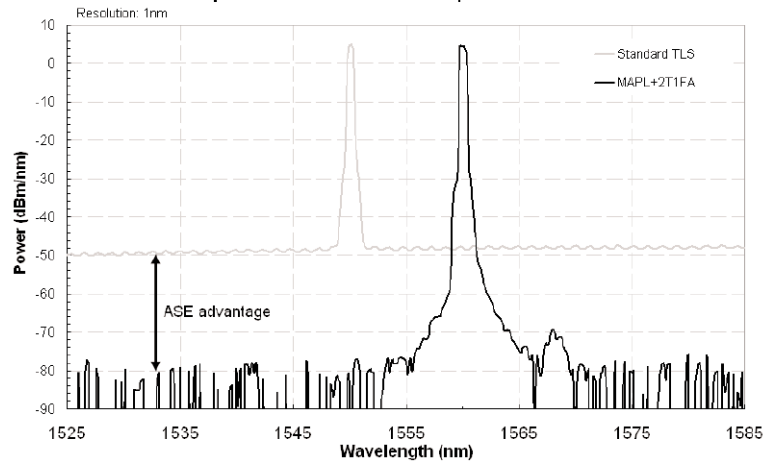

## Applications

- Dense wavelength division multiplexing (DWDM) transmission testing
- Optical amplifier testing
- Fiber characterization
- Transmitter and receiver testing

## Safety Information

This optical source cassette, when installed in the MAP chassis, complies to CE requirements plus UL3101-1 and CAN/CSA-C22.2 No.1010.1, meets the requirements of Class 3B in standard IEC 60825-1 (2002), and complies with 21 CFR 1040.1 except deviations per Laser Notice No.50, July 2001.

The Multiple Application Platform (MAP) Tunable Laser Cassette is a low ASE external cavity tunable diode laser that offers exceptional speed, accuracy and flexibility at a competitive price, making it the ideal source for advanced fiberoptic systems and component testing.

The wide wavelength range enables testing over the entire C+L-band range with a single source, while its high speed, mode-hop-free sweeping not only reduces testing time, but permits process testing and alignment of components during manufacturing.

As with all MAP cassettes, it may be seamlessly integrated with the extensive family of MAP cassettes, which enables complete custom solutions to be rapidly assembled and expanded as needed.

INVISIBLE LASER RADIATION  
AVOID EXPOSURE TO BEAM  
CLASS 3B LASER PRODUCT  
(IEC 60825-1, 2002)  
MAX. 500 mw, 700-1680 nm

**Specifications**

Parameter	Specification
<b>Wavelength</b>	
Range	1519 to 1630 nm, C+L-band
Accuracy <sup>1,2,3</sup>	± 15 pm enhanced accuracy mode <sup>4</sup> , ± 60 pm regular mode
Stability <sup>1,2</sup>	± 3 pm (typical) (1 hour), ± 10 pm (24 hours)
Repeatability <sup>1,2</sup>	± 3 pm (typical) enhanced accuracy mode <sup>4</sup>
Resolution <sup>1,2</sup>	1 pm
Tuning speed	1 to 100 nm/s
<b>Power</b>	
Maximum power	
Over wavelength range	+ 5.0 dBm (> 6.0 dBm typical)
Peak	+ 8.0 dBm
Stability <sup>1,2</sup>	0.01 dB (1 hour)
Resolution	0.001 dB
Flatness while scanning <sup>4</sup>	0.6 dB over wavelength range
Flatness while stepping	± 0.05dB
<b>Spectral properties</b>	
Line width, coherence control off	< 150 kHz
Side mode suppression ratio (SMSR)	45 dB
Signal to ASE ratio	See spectral plot
Relative intensity noise (RIN)	- 140 dB/Hz
Fiber/connector type	Polarization maintaining fiber (PMF)/APC connector
Fiber extinction ratio	> 20 dB
Recommended calibration period	1 year
Operating temperature	15 to 35 °C
Storage temperature	- 20 to 50 °C
Dimensions (W x H x D)	8.12 x 13.24 x 39.5 cm
Weight	3.8 kg

1. Measured at 25°C ±1 °C.
2. After 1 hour warm-up.
3. Valid for one month after calibration or user wavelength offset setting within ±4 °C.
4. Fixed power of 3 dBm.

**Ordering Information**

For more information on this or other products and their availability, please contact your local JDSU account manager or JDSU directly at 1-800-498-JDSU (5378) in North America and +800-5378-JDSU worldwide or via e-mail at sales@jdsu.com.

Please use the part number below to order the MAP Tunable Laser.

**MAPL+2T1FA**

All statements, technical information and recommendations related to the products herein are based upon information believed to be reliable or accurate. However, the accuracy or completeness thereof is not guaranteed, and no responsibility is assumed for any inaccuracies. The user assumes all risks and liability whatsoever in connection with the use of a product or its application. JDSU reserves the right to change at any time without notice the design, specifications, function, fit or form of its products described herein, including withdrawal at any time of a product offered for sale herein. JDSU makes no representations that the products herein are free from any intellectual property claims of others. Please contact JDSU for more information. JDSU and the JDSU logo are trademarks of JDS Uniphase Corporation. Other trademarks are the property of their respective holders. ©2007 JDS Uniphase Corporation. All rights reserved. 21031268 Rev. 008 01/07

**Test & Measurement Regional Sales**

<b>NORTH AMERICA</b> TOLL FREE: 1 866 228 3762 FAX: +1 301 353 9216	<b>LATIN AMERICA</b> TEL: +55 11 5503 3800 FAX: +55 11 5505 1598	<b>ASIA PACIFIC</b> TEL: +852 2892 0990 FAX: +852 2892 0770	<b>EMEA</b> TEL: +49 7121 86 2222 FAX: +49 7121 86 1222	<b>WEBSITE: <a href="http://www.jdsu.com">www.jdsu.com</a></b>
---	--	---	---	--