

ABN 43 064 478 842

231 osborne avenue clayton south, vic 3169
 PO box 1548, clayton south, vic 3169
 t 03 9265 7400 f 03 9558 0875
 freecall 1800 680 680

www.tmgtestequipment.com.au

Test & Measurement

- sales
- rentals
- calibration
- repair
- disposal

Complimentary Reference Material


This PDF has been made available as a complimentary service for you to assist in evaluating this model for your testing requirements.

TMG offers a wide range of test equipment solutions, from renting short to long term, buying refurbished and purchasing new. Financing options, such as Financial Rental, and Leasing are also available on application.

TMG will assist if you are unsure whether this model will suit your requirements.

Call TMG if you need to organise repair and/or calibrate your unit.

If you click on the "Click-to-Call" logo below, you can all us for FREE!

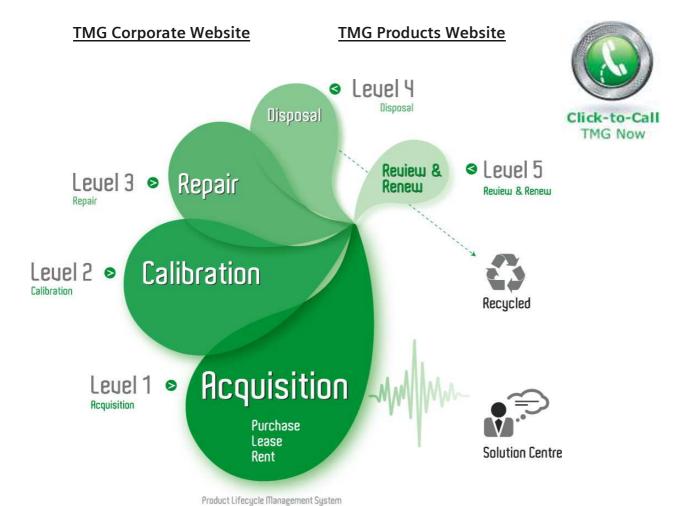

Disclaimer:

All trademarks appearing within this PDF are trademarks of their respective owners.







Z-Active™ Differential Probe Family

► P7313 • P7380 • P7360



Z-Active[™] Probing Architecture Leads the Way for High-speed Probing Applications

Tektronix has created a revolutionary Z-Active probe architecture that sets the industry benchmark for signal fidelity. Tektronix active probe architecture preserves high bandwidth while providing improved connectivity with low loading. The Z-Active architecture is a hybrid approach composed of a distributed attenuator topology feeding an active probe amplifier.

The Z-Active probes use a tiny passive probe tip element that is separate from the amplifier, extending the usable reach of the probe. In traditional active probes, adding this much length can introduce signal fidelity problems. However, this architecture maintains high DC input resistance and presents a higher AC

impedance than previous probe architectures. It accomplishes this while providing significant length between the probe body and the probe attachment point to the DUT. This architecture provides the best of both worlds: high DC impedance like existing active probes and the stable high frequency loading of Z_0 probes.

Signal Fidelity

You can be confident in the signal fidelity of your measurements because the Z-Active architecture provides:

- ► High bandwidth
- ► Excellent step response
- ► Low loading
- ► High CMRR

▶ Features & Benefits

Signal Fidelity

- >12.5 GHz Bandwidth (P7313 Only, Typical)
- >8.0 GHz Bandwidth (P7380 Only, Typical)
- >6.0 GHz Bandwidth (P7360 Only, Typical)

Low Probe Loading

- DC Input Resistance
 - 100 kΩ Differential
 - 50 kΩ Single-ended
- AC Loading
- $Z_{min} > 200 \Omega$ Out to 10 GHz

Versatility

- Make Differential or Singleended (Ground Referenced) Measurements*1
- Solder Down Capability
- Handheld Probing with Variable Spacing and Compliance (>8 GHz)
- Fixtured Probing

Interchangeable Tip-Clip™ Assemblies

- Connect to a Variety of Devices
- Economical

TekConnect® Interface

Applications

Examples Include, but Are Not Limited to:

 PCI-Express I and II, Serial ATA II, USB 2.0, DDRII, Rambus, XAUI



^{*1} For details, please see application note 60W-18344-0, "Making Single-ended Measurements with Differential Probes."

Connectivity

This family of probes uses Tip-Clip™ assemblies, an interchangeable probe tip system that enables customers to configure their probe with the optimal tip for their application. These detachable assemblies make it possible to replace a tip for a fraction of the cost formerly associated with such hardware changes.

The several lengths and variable spacing of the assemblies provide flexibility for adapting to vias and other test points of differing sizes. With Tektronix Tip-Clip assemblies, Monday's solder-in probe can become Tuesday's handheld tool, simply by switching tips. The Z-Active probe design allows the probe to easily switch between solder, handheld or fixtured applications.

Value

The combination of the Z-Active architecture and the Tip-Clip assemblies provide superior signal fidelity at a cost-effective price. The inexpensive Tip-Clip assemblies enable full performance solder connections at a very low price per connection. Over the life of a probe this can add up to significant savings in the cost of operation.

▶ Characteristics

P7360	P7380	P7313		
>6 GHz	>8 GHz	>12.5 GHz		
Rise Time (10% to 90%) (Guaranteed) <70 ps		<40 ps		
<50 ps	<35 ps	<25 ps		
5X or 25X, user selectable				
±0.625 V (5X) ±2.0 V (25X) P7380, P7313 ±2.5 V (25X) P7360 only				
	+4.0 V to −3.0 V			
+4.0 V to -3.0 V				
100 ΚΩ				
>290 Ω	>290 Ω	>200 Ω		
<30 nV/√Hz (5X) <75 nV/√Hz (25X)				
>50 dB at 1 MHz >35 dB at 1 GHz >20 dB at 6 GHz	>50 dB at 1 MHz >35 dB at 1 GHz >20 dB at 8 GHz	>50 dB at 1 MHz >35 dB at 1 GHz >20 dB at 6 GHz >15 dB at 12.5 GHz		
	±15 V			
TekConnect®				
1.5 m	1.2 m	1.2 m		
	>6 GHz <70 ps <50 ps >290 Ω >50 dB at 1 MHz >35 dB at 1 GHz >20 dB at 6 GHz	>6 GHz >8 GHz <70 ps		

► Ordering Information

P7313

>12.5 GHz Differential Probe for TekConnect® Interface.

Includes: See Standard Accessories table.

P7380

>8.0 GHz Differential Probe for TekConnect® Interface.

Includes: See Standard Accessories table.

P7360

>6.0 GHz Differential Probe for TekConnect® Interface.

Includes: See Standard Accessories table.

► Standard Accessories

Description	P7360	P7380	P7313	Reorder Part Number
Pouch, Nylon Carrying Case with Inserts	1 each	1 each	1 each	016-1952-xx Qty 1
Accessory Performance Summary and Reorder Sheet	1 each	1 each	1 each	001-1389-xx Qty 1
User Manual – Printed. Includes Reply Card and CD	1 each	1 each	1 each	020-2640-xx Qty 1
BNC (M)-to-Minigrabber Adapter	1 each	1 each	1 each	013-0342-xx Qty 1
Anti-static Wrist Strap	1 each	1 each	1 each	006-3415-xx Qty 1
Magnifying Glasses	1 each	1 each	1 each	378-0486-xx Qty 1
Calibration Data Report	1 each	1 each	1 each	Opt. D1
Accessory Box and Contents	1 each	1 each	1 each	P7360: 020-2690-xx P7380: 020-2557-xx P7313: 020-2636-xx
Attachment Kit	1 each	1 each	1 each	016-1953-xx Qty 1
Color Band Kit	1 each	1 each	1 each	016-1948-xx Qty 1
Short Flex, Large Resistor 1/8 W Tip-Clip Assembly	_	3 each	_	020-2601-xx Qty 10
Short Flex, Small Resistor Tip-Clip Assembly	2 each	3 each	3 each	020-2600-xx Qty 10
Medium Flex, Large Resistor 1/8 W Tip-Clip Assembly	2 each	3 each	_	020-2603-xx Qty 10
Medium Flex, Small Resistor Tip-Clip Assembly	2 each	3 each	3 each	020-2602-xx Qty 10
Long Flex, Large Resistor 1/8 W Tip-Clip Assembly	_	3 each	_	020-2605-xx Qty 10
Long Flex, Small Resistor Tip-Clip Assembly	2 each	3 each	3 each	020-2604-xx Qty 10
Tip-Clip Ejector*1 (Kit of 3)	1 each	1 each	1 each	_
Adhesive Tip-Clip Tape*1 (Strip of 10)	3 each	3 each	3 each	_
HBW Straight Flex Tip-Clip Assembly	_	_	3 each	020-2639-xx Qty 10 020-2657-xx Qty 5
HBW Right-Angle Flex Tip-Clip Assembly	_	_	3 each	020-2638-xx Qty 10 020-2656-xx Qty 5
Wire Replacement Kit	_	_	1 each	020-2644-xx Qty 1

 $^{^{*1}}$ Tip-Clip Ejectors and Tip-Clip Tape are shipped standard with the 020-xxxx-xx Tip-Clip Assembly Kits.

Z-Active™ Differential Probe Family

► P7313 • P7380 • P7360

Contact Tektronix:

ASEAN / Australasia (65) 6356 3900

Austria +41 52 675 3777

Balkan, Israel, South Africa and other ISE Countries +41 52 675 3777

Belgium 07 81 60166

Brazil & South America 55 (11) 3741-8360

Canada 1 (800) 661-5625

Central East Europe, Ukraine and the Baltics +41 52 675

37

Central Europe & Greece +41 52 675 3777

Denmark +45 80 88 1401

Finland +41 52 675 3777

France & North Africa +33 (0) 1 69 86 81 81

Germany +49 (221) 94 77 400

Hong Kong (852) 2585-6688

India (91) 80-22275577 Italy +39 (02) 25086 1

Japan 81 (3) 6714-3010

Luxembourg +44 (0) 1344 392400

Mexico, Central America & Caribbean 52 (55) 56666-333

Middle East, Asia and North Africa +41 52 675 3777

The Netherlands 090 02 021797

Norway 800 16098

People's Republic of China 86 (10) 6235 1230

Poland +41 52 675 3777

Portugal 80 08 12370

Republic of Korea 82 (2) 528-5299

Russia & CIS +7 (495) 7484900

South Africa +27 11 254 8360

Spain (+34) 901 988 054

Sweden 020 08 80371

Switzerland +41 52 675 3777 **Taiwan** 886 (2) 2722-9622

14 (8) 48 44 88 48

United Kingdom & Eire +44 (0) 1344 392400

USA 1 (800) 426-2200

For other areas contact Tektronix, Inc. at: 1 (503) 627-7111

Updated 28 February 2006

Our most up-to-date product information is available at: **www.tektronix.com**

CE







Product(s) are manufactured in ISO registered facilities.

Product(s) complies with IEEE Standard 488.1-1987, RS-232-C, and with Tektronix Standard Codes and Formats.

Copyright © 2006, Tektronix. All rights reserved. Tektronix products are covered by U.S. and foreign patents, issued and pending. Information in this publication supersedes that in all previously published material. Specification and price change privileges reserved. TEKTRONIX and TEK are registered trademarks of Tektronix, Inc. All other trade names referenced are the service marks, trademarks or registered trademarks of their respective companies.

HB/WWW 51W-17891-5



► Recommended Accessories

Description	P7360	P7380	P7313	Part Number
P7380HHA Hand- held Probe Adapter (Includes Variable Spacing Tip-Clip™ Kit)	Yes (>6 GHz BW)	Yes	Yes (>8 GHz BW)	Р7380ННА
Variable Spacing Tip-Clip Kit (Kit of 3)	Yes (>6 GHz BW)	Yes	Yes (>8 GHz BW)	020-2596-xx

► Optional Accessories

Description	P7360	P7380	P7313	Part Number
Probe Positioner	Yes	Yes	Yes	PPM100
Probe Positioner	Yes	Yes	Yes	PPM203B
PPM203B, PPM100 Adapter Fixture	Yes	Yes	Yes	013-0339-00
Calibration Fixture	Yes	Yes	Yes	P7360: 067-0419-xx P7380: 067-0419-xx P7313: 067-1616-xx
CSA/TDS8200 Series TekConnect® Probe Interface	Yes	Yes	Yes	80A03
Deskew Fixture	Yes	Yes	Yes	067-1586-00
Real-Time Spectrum Analyzer TekConnect Probe Adapter	Yes	Yes	Yes	RTPA2A

Service Options

Opt. C3 - Calibration Service 3 years.

Opt. C5 - Calibration Service 5 years.

Opt. D3 – Calibration Data Report 3 years (with Option C3).

Opt. D5 – Calibration Data Report 5 years (with Option C5).

Opt. R3 - Repair Service 3 years.

Opt. R5 - Repair Service 5 years.

Language Options

Opt. LO - English Manual.

Opt. L5 - Japanese Manual.

Opt. L7 - Simplified Chinese Manual.